



## SM120

### Utility Track Loader

#### Do More with Less

The SM120 uses Wacker Neuson's ergonomic mini-loader controls, while maintaining operator comfort features such as padding and a spring suspension for a better ride and added stability. The high hinge pin of the SM120 provides a 5'3" bucket dump height and allows for easy loading into high sided trucks and dumpsters. The wide (11") track width provides among the lowest ground pressures on the market, minimizing incidental damage to the work site.

## Highlights

- All Day Comfort
- Extra Wide Tracks

## Technical Data

### Hydraulic

Flow rate	49.0 l/min
Auxiliary hydraulics relief pressure	227.0 bar

### Mechanical - Output Details

Ground Pressure	0.3 bar
Travel speed	8.4 km/h

### Mechanical Details

Overall Length without bucket	2,141.0 mm
Overall Length with Bucket	2,742.0 mm
Overall width without bucket	902.0 mm
Height	1,478.0 mm
Bucket Hinge Pin Height	2,176.0 mm
Maximum bucket roll back at ground	25.0 °
Bucket roll back at maximum height	92.0 °
Angle of departure	25.0 °
Bucket dump height at maximum height	1,595.0 mm
Bucket dump angle at maximum height	42.0 °
Operating weight	1,703.0 kg
Underclearance	198.0 mm

Length of Track on Ground	1,093.0 mm
Dump reach at maximum height	557.0 mm

### Engine

Cooling	Water-cooling
Engine type	Diesel engine
Cylinder	3.0
Cylinder capacity	1,266.0 cm <sup>3</sup>
Power rating max.	18.5 KW
Operating power	18.4 KW
Operating Engine speed	2,600.0 1/min
Maximum torque	85.0 Nm
Engine Manufacturer	Yanmar
Engine Designation	3TNV80 FT

### Operating Fluids

Fuel Tank capacity	64.0 l
--------------------	--------

### Chassis


Tip Load	1,589.0 kg
Rated Operating Capacity at 50% Tip Load	795.0 kg
Rated Operating Capacity at 35% Tip Load	556.0 kg

## Available engines

### ■ Yanmar 3TNV80 FT

Cooling	Water-cooling
Engine type	Diesel engine
Cylinder	3
Cylinder capacity	1,266 cm <sup>3</sup>
Power rating max.	18.5 KW
Maximum torque	85 Nm
Engine Manufacturer	Yanmar
Engine Designation	3TNV80 FT

## Dimensions

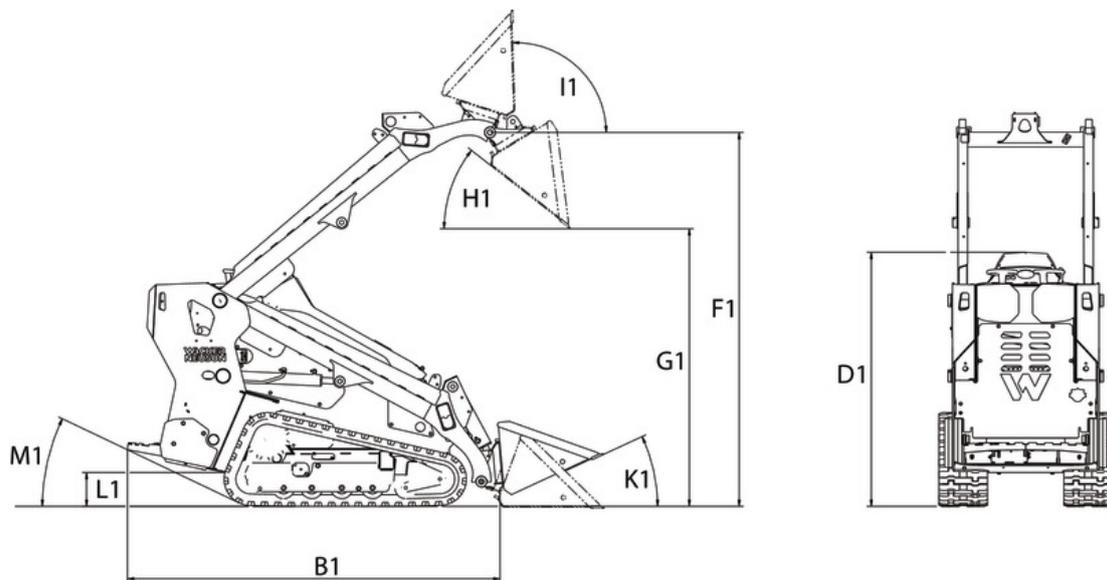

A1	Overall length with bucket	2,751.6 mm
B1	Overall length without bucket	2,150.2 mm
D1	Overall height	1,478 mm
F1	Hinge pin height	2,175 mm
G1	Dump height max.	1,615.1 mm
K1	Bucket rollback at ground level	25 °
I1	Bucket rollback at max. stroke height	92 °
H1	Dump angle	38.2 °
L1	Ground clearance	196.9 mm
M1	Angle of departure	25.6 °