



## WL750

### Wheel loaders

#### The versatile machine



These features characterise the WL750 wheel loader: Comfort cabin with excellent ergonomics and 360° visibility, electronically controlled drive system with various operating modes, sturdy load arm with an optimal view of the attachment, large range of options and a modern machine design. The transversely installed engine and the optimised arrangement of components ensure very good maintenance access. The WL750 wheel loader is the ideal model in the wheel loader class with 26.49ft<sup>3</sup> bucket volume. It combines power, reliable hydraulics and compact dimensions with well-engineered technology and an excellent price-performance ratio.

### Highlights

- Electronically regulated drive system
- Comfortable Cab
- Transversely mounted motor for optimum service accessibility
- Robust central joint with optimized hose routing
- Service access front end

### Technical Data

#### Standard engine data

Engine manufacturer	Kohler
Motor type	KDI1903TCR
Cylinder	3
Drive output	42 kW
Drive output	56.3 HP
at max. rpm	2,600 rpm
Cylinder capacity	113.57 in <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF

#### Electrical system

Operating voltage	12 V
Battery	100 Ah
Alternator	120 A

#### Weights

Bucket capacity (standard bucket)	22.95 ft <sup>3</sup>
Operating weight	8,157 - 9,259 lb
Tipping load with bucket – machine straight, loading frame horizontal	6,460 - 7,694 lb

Tipping load with bucket – machine pivoted, loading frame horizontal	5,644 - 6,746 lb
--	------------------

Tipping load with pallet fork – machine straight, loading frame horizontal	5,269 - 6,283 lb
--	------------------

Tipping load with pallet fork – machine pivoted, loading frame horizontal	4,630 - 5,512 lb
---	------------------

#### Driver's cab

Driver's cab	FSD (cabin)
--------------	-------------

#### Filling levels

Tank capacity for fuel	21.13 US gal
Tank capacity for hydraulic oil	8.45 US gal

#### Drive system

Type of drive	electronically controlled
drive unit	Hydrostatic via transfer gearbox and universal joint shaft
Speed levels	2
Axle	PA1200
Travel speed Standard	0-12.43 mph
Travel speed Option 1	0-18.64 mph
Operating brake	drum brake (multi-disk brakes, option)
Parking brake	drum brake (mechanical handbrake lever)

Differential lock	100 % front axle + rear axle
-------------------	------------------------------

### ■ Hydraulic system

Drive hydraulics working pressure (max.)	7,252 psi
--	-----------

Work hydraulics discharge volume (max.)	14.95 (18.60) gpm
---	-------------------

Work hydraulics working pressure (max.)	3,408 psi
---	-----------

### ■ Kinematics

Kinematics type	P
-----------------	---

Lifting cylinder	1
------------------	---

Tipping cylinder	1
------------------	---

Quick change system	hydraulic
---------------------	-----------

### ■ Steering

Steering type	hydraulically activated articulated pendulum steering
---------------	---

Steering cylinder	1
-------------------	---

### ■ Noise characteristic values

Average sound power level LwA (operator's canopy)	99.9 dB(A)
---	------------

Guaranteed sound power level LwA (operator's canopy)	101 dB(A)
--	-----------

Specified sound pressure level LpA (operator's canopy)	70 dB(A)
--	----------

Average sound power level LwA (cabin)	99.9 dB(A)
---------------------------------------	------------


Guaranteed sound power level LwA (cabin)	101 dB(A)
--	-----------

Specified sound pressure level LpA (cabin)	69 dB(A)
--	----------

### ■ Other information

FSD = operator's canopy  
 DPF = diesel particulate filter  
 DOC = diesel oxidation catalyst  
 Tipping load calculation according to ISO 14397

# Dimensions

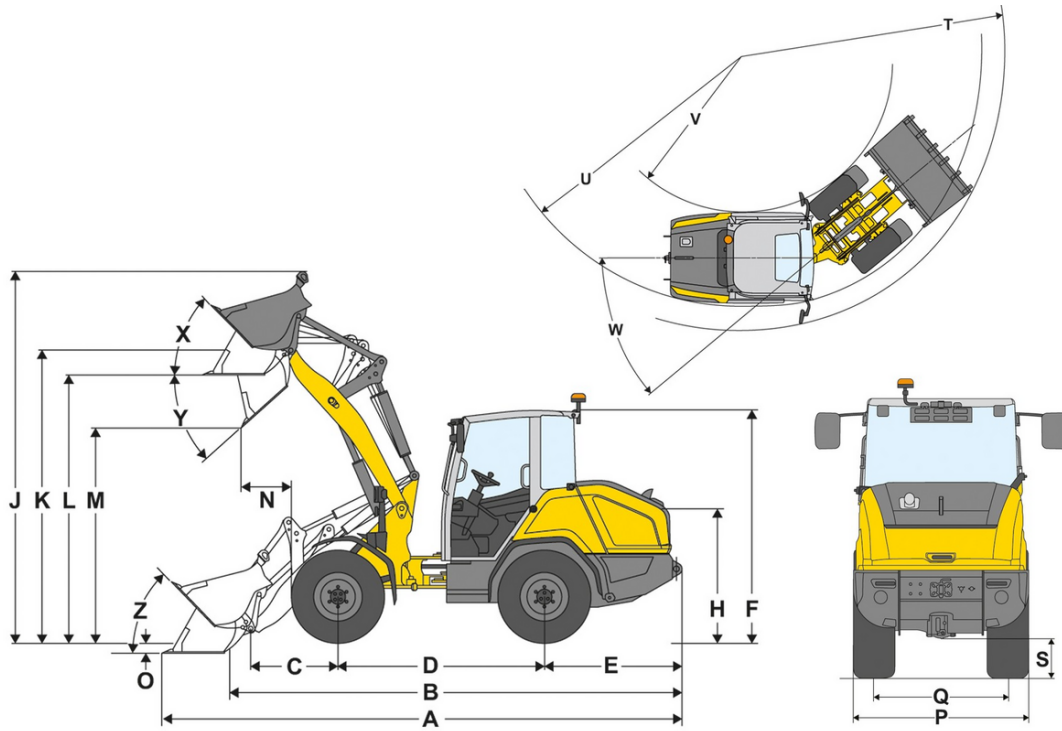

A	Total length	213.4 in
B	Total length without bucket	181.5 in
C	Bucket pivot point (to center of axle)	35.8 in
D	Wheel base	84.6 in
E	Rear overhang	56.5 in
F	Height with cab	95.1 in
	Height with lowered operator's canopy	91.9 in
F	Height with operator's canopy raised	95.1 in
H	Seat height	54.7 in
J	Total working height	152.2 in
K	Bucket pivot point (max. lift height)	119.7 in
L	Load-over height	109.4 in
M	Dumping height	87.8 in
N	Reach (at M)	21.3 in
O	Digging depth	4.5 in
P	Total width	57.7 in
Q	Track width	46.1 in
S	Ground clearance	13.2 in
T	Maximum external radius	164.0 in
U	Radius on the outer edge	151.6 in
V	Inner radius	88.2 in
W	Articulation angle	40 °
X	Rollback angle at max. lift height	45 °
Y	Dumping angle	42 °
Z	Rollback angle on ground	46 °