



EZ36

Tracked Zero Tail Excavator

Compact design and high performance

Get in and start working – with the EZ36, performance meets maximum efficiency. This zero tail excavator is ideal if compact dimensions are needed. Minimal rear overhang makes working along walls and other obstacles an easy task. The machine features intuitive operation using a joystick, display and jog dial, as well as a comfortable working environment. This leaves the operator in full control of the application. Configurable to meet a customer's requirements, the EZ36 offers dealer-installed options, including a hydraulic thumb and rotating beacon.

Highlights

- Comfortable, fully glazed cab
- Intuitive operating concept
- Optimized drive concept
- VDS Vertical Digging System
- Zero Tail

Technical Data

■ Hydraulic

Operating pressure hydraulics	3,480.0 psi
Hydraulic pump	Axial piston and 2 gear pumps
Flow rate max.	31.7 gal/mi

Cylinder capacity	100.2 Inch ³
Inclined position max.	30.0 °
Fuel	HVO EN15940
Effective power	24.4 hp
Nominal Engine speed	2,400.0 1/min
Exhaust-gas limit	EU Stage V
Battery capacity (nom. value)	71.0 Ah
Engine Manufacturer	Yanmar
Engine Designation	3TNV88

■ Mechanical - Output Details

Travel speed	2.9 m/H
--------------	---------

Cylinder capacity	100.2 Inch ³
Inclined position max.	30.0 °
Fuel	HVO EN15940
Effective power	24.4 hp
Nominal Engine speed	2,400.0 1/min
Exhaust-gas limit	EU Stage V
Battery capacity (nom. value)	71.0 Ah
Engine Manufacturer	Yanmar
Engine Designation	3TNV88

■ Mechanical Details

Length	216.9 "
Width	68.9 "
Height	106.7 "
Operating weight (min.-max.)	8,196.8 - 10,901.9 lb
Digging depth (max.)	137.7 "

Cylinder capacity	100.2 Inch ³
Inclined position max.	30.0 °
Fuel	HVO EN15940
Effective power	24.4 hp
Nominal Engine speed	2,400.0 1/min
Exhaust-gas limit	EU Stage V
Battery capacity (nom. value)	71.0 Ah
Engine Manufacturer	Yanmar
Engine Designation	3TNV88

■ Engine

Cooling	Water-cooling
Engine type	Diesel engine
Cylinder	3.0

Traction drive	Axialpistonmotor with RGU
Shipping weight	7,780.1 lb
Sound power LWA, guaranteed	94.0 dB(A)

Available engines


22,2 kW Diesel engine (Stage 3a)

Cylinder capacity	100.2 Inch3
Effective power	29.8 hp
Stroke	3.5 "
Bore	3.5 "
Cooling	Water-cooling
Engine type	Diesel engine
Cylinder	3
Exhaust-gas limit	EPA3
Engine Manufacturer	Yanmar
Engine Designation	3TNV88

18,2 kW Diesel engine (Stage 5)

Cylinder capacity	100.2 Inch3
Effective power	24.4 hp
Maximum torque	64.7 lb/ft
Stroke	3.5 "
Bore	3.5 "
Cooling	Water-cooling
Engine type	Diesel engine
Cylinder	3
Fuel	Diesel EN 590
Exhaust-gas limit	EU Stage V
Engine Manufacturer	Yanmar
Engine Designation	3TNV88

Dimensions

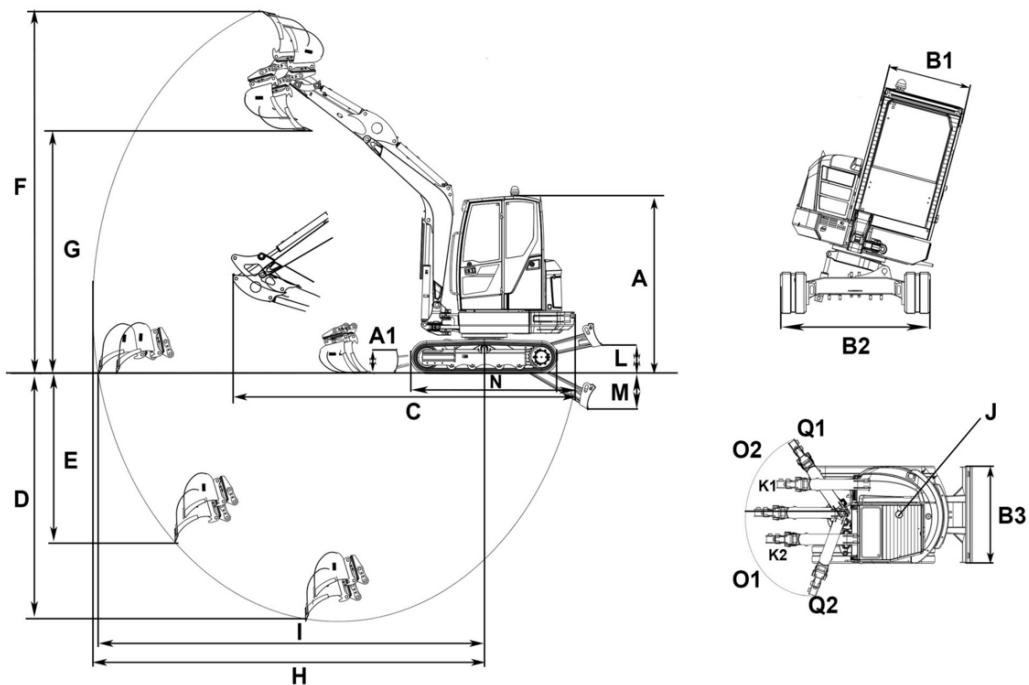

		VDS	
A	Height with cab	98.15 in	101.38 in
A1	Height of dozer blade	14.1 in	14.1 in
A	Total height with rotating beacon	103.5 in	106.7 in
B1	Width of cab	38.6 in	38.6 in
B2	Width travel gear	68.9 in	68.9 in
B3	Width of dozer blade	68.9 in	68.9 in
C	Transport length	216.82 in	216.27 in
D	Digging depth max., short shovel arm	127.93 in	124.98 in
	Digging depth max., long shovel arm	137.78 in	134.83 in
E	Piercing depth max., short shovel arm	83.65 in	80.69 in
	Piercing depth max., long shovel arm	92.98 in	90.03 in
F	Piercing height max., short shovel arm	194.05 in	197.16 in
	Piercing height max., long shovel arm	200.23 in	203.19 in
G	Dumping height max., short shovel arm	131.44 in	134.39 in
	Dumping height max., long shovel arm	137.47 in	140.42 in
H	Digging radius max., short shovel arm	208.74 in	207.64 in
	Digging radius max., long shovel arm	219.93 in	218.51 in
I	Max. reach at ground level (short shovel arm)	212.41 in	211.89 in
	Max. reach at ground level (long shovel arm)	222.26 in	221.78 in
J	Tail swing radius	36.76 in	36.76 in
K1	Boom offset max. (to center of bucket right side)	26.79 in	26.79 in
K2	Boom offset max. (to center of bucket left side)	25.61 in	25.61 in
L	Stacking height max. (dozer blade above surface)	15.48 in	15.48 in
M	Digging depth max. (dozer blade below surface)	19.9 in	19.9 in
N	Length travel drive	81.24 in	81.24 in
O1	Max. swivel angle (arm system to the left)	70 °	70 °
O2	Max. swivel angle (arm system to the right)	45 °	45 °
Q1	Boom swing radius right	55 °	55 °
Q2	Boom swing radius left	70 °	70 °

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.