



DT10

Track Dumper

The professional machine

The hydrostatic drive system allows for quick and convenient operation and the single-piece engine hood, as well as the optimal arrangement of the service points, make daily maintenance much easier. The rubber tracks and the excellent weight distribution reduce the ground pressure, ensuring more extensive application uses. The variety of skip versions make it a very versatile machine.

Highlights

- Hydrostatic drive
- Small dimensions
- Hanging suspension-mounted rollers

Technical Data

■ Hydraulic

| | |
|----------------|-------------------------------------|
| Hydraulic pump | Variable displacement and gear pump |
| Flow rate max. | 66.0 l/min |

| | |
|-------------------|-----------------------|
| Cylinder | 2.0 |
| Cylinder capacity | 479.0 cm ³ |

■ Mechanical - Output Details

| | |
|------------------------------|------------------|
| Travel speed | 4.0 km/h |
| ■ Mechanical Details | |
| Length | 1,800.0 mm |
| Width | 790.0 mm |
| Height | 1,365.0 mm |
| Weight | 680.00 kg |
| Payload max. | 1,000.0 kg |
| Skip capacity heaped | 427.0 l |
| Operating weight (min.-max.) | 665.0 - 915.0 kg |

| | |
|------------------------|-----------------------|
| Cylinder | 2.0 |
| Cylinder capacity | 479.0 cm ³ |
| Inclined position max. | 20.0 ° |
| Effective power | 9.6 kW |
| Nominal Engine speed | 3,600.0 1/min |
| Engine Manufacturer | Kubota |
| Engine Designation | Z-482 |
| Stroke | 68.0 mm |
| Bore | 67.0 mm |


■ Environment Data

| | |
|-----------------------------|-------------|
| Sound level LpA | 88.0 dB(A) |
| Sound level LpA (Standard) | ISO 6396 |
| Sound power LWA, guaranteed | 101.0 dB(A) |
| Sound power LWA (Standard) | ISO 6395 |

■ Shipping and Storage

| | |
|-----------------|----------|
| Shipping weight | 590.0 kg |
|-----------------|----------|

Dimensions

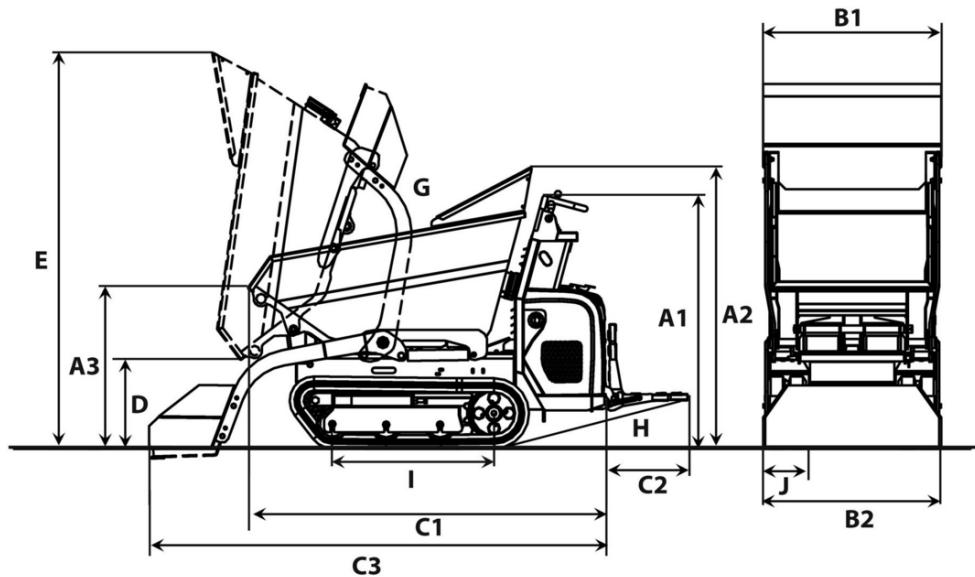

| | | Front tip skip | High tip skip | Swivel tip skip | Front tip skip | Light goods skip |
|----|---|----------------|---------------|-----------------|----------------|------------------|
| A1 | Height above operator's stand | 1,280 mm | 1,280 mm | 1,280 mm | 1,280 mm | 1,280 mm |
| A2 | Height over skip hand guard | 1,365 mm | | 1,301 mm | | |
| A3 | Height front edge of skip | 812 mm | 1,111 mm | 1,045 mm | 849 mm | 812 mm |
| | Height front edge of high tip skip raised | | 1,688 mm | | | |
| B1 | Width of skip | 790 mm | 764 mm | 730 mm | 806 mm | 830 mm |
| B2 | Width of undercarriage | 790 mm | 790 mm | 790 mm | 790 mm | 790 mm |
| B7 | Width with self-loading equipment | 830 mm | 830 mm | | | 830 mm |
| C1 | Total length without footboard | 1,800 mm | 1,684 mm | 1,960 mm | 1,882 mm | 1,823 mm |
| C2 | Length footboard | 393 mm | 393 mm | 393 mm | 393 mm | 393 mm |
| C3 | Length with self-loading equipment, without footboard | 2,267 mm | 2,240 mm | | | 2,277 mm |
| D | Dumping height max. | 474 mm | 868 mm | 650 mm | 256 mm | 460 mm |
| | Dumping height max., high tip skip raised | | 1,414 mm | | | |
| E | Skip height tilted | 1,905 mm | 2,009 mm | 2,112 mm | 1,430 mm | 1,950 mm |
| | Skip height tilted, high tip skip raised | | 2,700 mm | | | |
| G | Dumping angle | 70 ° | 82 ° | 85 ° | 56 ° | 70 ° |
| H | Rollback angle footboard | 14 ° | 14 ° | 14 ° | 14 ° | 14 ° |
| I | Length chain stand | 875 mm | 875 mm | 875 mm | 875 mm | 875 mm |
| K | Dumping width lateral | | | 487 mm | | |