



## 4080 Wheel loaders

### Technical Data

#### ■ Standard engine data

Engine manufacturer	Perkins
Motor type	904J-E36TA
Cylinder	4
Drive output	74.4 kW
Drive output	101.2 PS
at max. rpm	2,200 U/min
Cylinder capacity	3,621 cm <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF/SCR

#### ■ Electrical system

Operating voltage	12 V
Battery	135 Ah
Alternator	85 A

#### ■ Weights

Operating weight	5,900 kg
Tipping load with bucket – machine straight, loading frame horizontal	3,674 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	3,031 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	3,344 kg
Tipping load with pallet fork – machine pivoted, loading frame horizontal	2,791 kg

#### ■ Driver's cab

Driver's cab	Cab
--------------	-----

#### ■ Filling levels

Tank capacity for fuel	105 l
Tank capacity for hydraulic oil	95 l
Tank capacity for urea solution	19 l

#### ■ Drive system

Type of drive	Hydrostatic
---------------	-------------

drive unit	universal joint shaft
Speed levels	2
Axle	PA 1422
Travel speed Standard	0-20 km/h
Travel speed Option 1	0-30 km/h
Travel speed Option 2	0-40 km/h
Operating brake	Disc brake (combined with parking brake)
Parking brake	Service and parking brake in the drive train acts on all 4 wheels
Differential lock	100 % front axle + rear axle

#### ■ Hydraulic system

Drive hydraulics working pressure (max.)	455 bar
Work hydraulics discharge volume (max.)	100 (115-150) l/min
Work hydraulics working pressure (max.)	210 bar

#### ■ Kinematics

Kinematics type	Z
Lifting cylinder	2
Tipping cylinder	1
Quick change system	hydraulic

#### ■ Steering

Steering type	hydraulically activated articulated pendulum steering
Steering cylinder	1
Oscillating angle	±12 degree


#### ■ Noise characteristic values

Average sound power level L <sub>wA</sub> (cabin)	101.6 dB(A)
Guaranteed sound power level L <sub>wA</sub> (cabin)	103 dB(A)
Specified sound pressure level L <sub>pA</sub> (cabin)	74 dB(A)

#### ■ Other information

FSD = operator's canopy  
DPF = diesel particulate filter  
DOC = diesel oxidation catalyst  
SCR = selective catalytic reduction  
Tipping load calculation pursuant to ISO 14397

## Dimensions

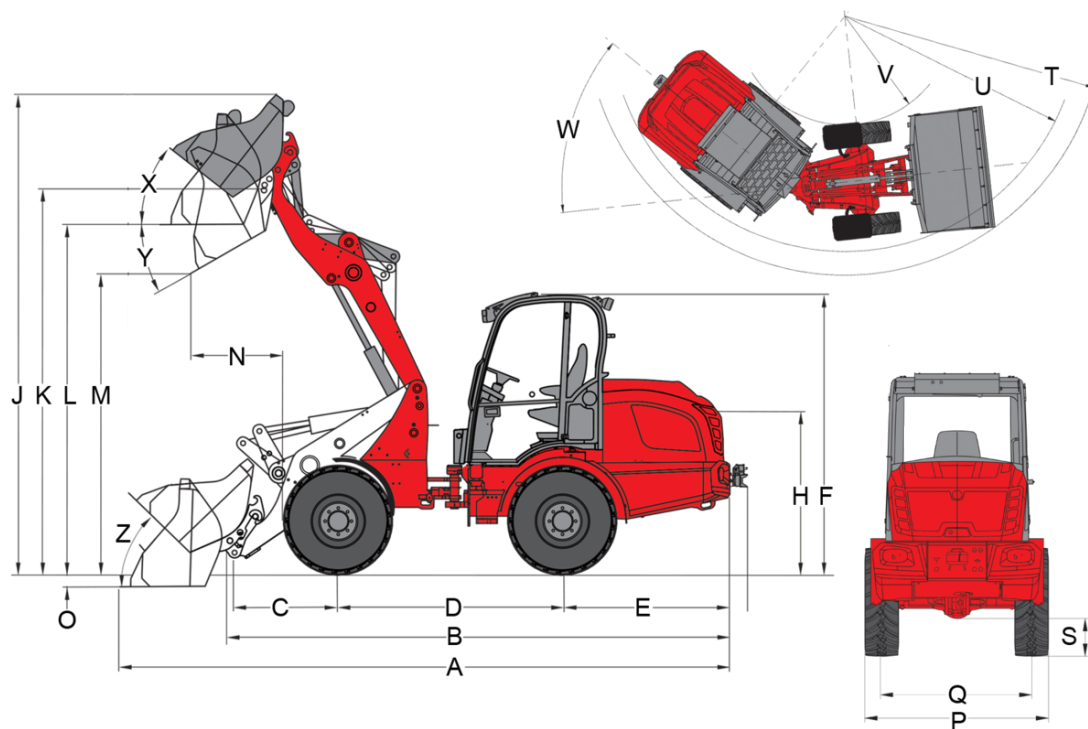

### Z-kinematics (standard)

	Standard components	12.5-20 MPT ETO
<b>A</b>	Total length	5,800 mm
<b>B</b>	Total length without bucket	4,790 mm
<b>C</b>	Bucket pivot point (to center of axle)	990 mm
<b>D</b>	Wheel base	2,150 mm
<b>E</b>	Rear overhang	1,580 mm
<b>F</b>	Height with cab	2,680 mm
<b>H</b>	Seat height	1,560 mm
<b>J</b>	Total working height	4,560 mm
<b>K</b>	Bucket pivot point (max. lift height)	3,670 mm
<b>L</b>	Load-over height	3,330 mm
<b>M</b>	Dumping height	2,860 mm
<b>N</b>	Reach (at M)	870 mm
<b>O</b>	Digging depth	110 mm
<b>P</b>	Total width	1,827 mm
<b>Q</b>	Track width	1,422 mm
<b>S</b>	Ground clearance	361 mm
<b>T</b>	Maximum external radius	4,055 mm
<b>U</b>	Radius on the outer edge	3,683 mm
<b>V</b>	Inner radius	1,702 mm
<b>W</b>	Articulation angle	45 °
<b>X</b>	Rollback angle at max. lift height	38 °
<b>Y</b>	Dumping angle	28 °
<b>Z</b>	Rollback angle on ground	46 °

## Standard components

### Engine

- Perkins 904J-E36TA ({74,4 kW / 101,2 PS}{74,4 kW / 99.8 HP})

### Tires

- 12.5 - 20 BKT MP567 MPT ET0, MPT profile, width {1750 mm}{68.9 in}

### Steering system

- Hydraulic articulated pendulum steering, pendulum angle  $\pm 12^\circ$
- Steering cylinder: 1

### Drive system & Axles

- Axle: PA1422 planetary axle
- Drive: Hydrostatic all-wheel drive
- Differential lock: 100%, electrically-hydraulically engageable on front and rear axles
- Speed: {20 km/h}{12.4 mph}
- Driving speeds: 2 | {7 km/h / 20 km/h}{4.4 mph / 12.4 mph}
- Service brake: Hydrostatic drive acting on all 4 wheels (wear-free)
- Parking brake: Central service and parking brake in the drive train acting on all 4 wheels

### Hydraulics

- Hydraulically piloted joystick with directional control switch and integrated button for differential lock
- 3rd Front control circuit electrically proportional parallel via joystick, incl. double detent
- Oil volume adjustment via jog dial
- Hydraulic oil cooler

### Operator's cab

- Comfort cab with heating and ventilation, laterally tiltable, ROPS / FOPS tested
- Comfort seat with seat belt full suspension, weight, back and longitudinal adjustment
- Generous space
- Ergonomically generous entry
- Adjustable steering wheel (tilt)

### Other

- Bucket level indicator
- Self-recovery coupling

### Loading system

- Loading system LS935
- Quick-change device (Weidemann) hydraulic
- Kinematics: Z
- Lift cylinder: 2
- Tilt cylinder: 1
- Float position for lift cylinder

### EquipCare (telematics)

- EquipCare 36 months (incl. App & Manager)

### Lighting

- LED Basic work lights (1000 lm) on the roof, 2 at the front, 2 at the rear
- Lighting system in accordance with StVZO

## Options

### Operator's cab

- Storage box with bottle holder (left next to the operator's seat)
- Radio DAB+-ready (aerial, speaker)
- Radio DAB+ complete
- Air-conditioning system (Machine height + {30 mm}{1.18 in})
- Front window protective grating
- Cabin outlet 230 V (connection power max. 2000 W), (Only works with connected engine pre-heating on the 230 V grid)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

## Operator's seat

- Fabric seat; heated seats (MSG 85)
- Fabric seat; air suspension (MSG 95AL/722)
- Fabric seat; air suspension; heated seats (MSG 95AL/732)

## Lighting

- LED Performance work lights (2000 lm) on the roof, 2 at the front, 2 at the rear
- Rotating beacon (yellow) (National regulations must be observed!)

## StVZO – equipment

- Individual operating permit > {25 km/h}{15.5 mph}
- Individual operating permit > {25 km/h}{15.5 mph}
- Registration plate mounting

## Engine

- Manual throttle
- Engine pre-heating (coolant) + hydraulic oil pre-heating 230 V

## Drive system & Axles

- {30 km/h}{18.6 mph} (speed increase)
- {40 km/h}{24.9 mph} (speed increase)
- Proportional speed limiter (slow speed device)
- Mudflap front (mounted on the fender)

## Tires

- 400/70-20 BKT AS 504 ET0, AS tread, width {1840 mm}{72.44 in}
- 400/70-20 ET-20 BKT AS 504 ET-50, AS tread, width {1930 mm}{75.98 in}
- 500/45-20 Alliance 331 ET0, AS profile, width {1920 mm}{75.59 in}
- 550/45-22.5 Alliance 331 ET0, AS profile, width {1990 mm}{78.35 in}
- 550/45-22.5 Alliance 331 ET-50, AS profile, width {2080 mm}{81.9 in}
- 600/40-22.5 BKT TR 678 ET-50, AS profile, width {2080 mm}{81.9 in}
- 405/70 R 18 EM Alliance 608 ET0, EM tread, width {1815 mm}{71.46 in}
- 405/70 R 20 EM Alliance 608 ET0, EM tread, width {1829 mm}{72.01 in}
- 340/80 R 18 ET0 Alliance Multiuse 550, Multiuse tread, width {1770 mm}{69.69 in}
- 400/70 R 20 ET0 Alliance Multiuse 550, Multiuse tread, width {1830 mm}{72.05 in}
- 400/70 R 20 ET-60 Alliance Multiuse 550, Multiuse tread, width {1950 mm}{76.77 in}

## Water filling

- Water filling valves without filling (front wheels)
- Water filling valves without filling (rear wheels)
- Water filling valves without filling (front and rear wheels)
- Water filling valves with filling (front wheels)
- Water filling valves with filling (rear wheels)
- Water filling valves with filling (front and rear wheels)

## Loading system

- Loading swing arm damping
- Lowering brake valve (hose burst valves for lift and tipping cylinders)

## Quick change plates

- Euro (hydraulic - ISO23206 EURO HV)
- SkidSteer (hydraulic)
- SMS HV (hydraulic)
- Kramer (hydraulic)
- Volvo TPV (hydraulic)

## Hydraulics in front

- 3rd control circuit flow sharing {100 l/min}{26.4 gpm} (loading system can be operated together with 3rd control circuit)
- 3rd control circuit flow sharing {115 l/min}{30.4 gpm} (loading system can be operated together with 3rd control circuit)
- 4th control circuit flow sharing {100 l/min}{26.4 gpm} (loading system can be operated together with 3rd control circuit)
- 4th control circuit flow sharing {115 l/min}{30.4 gpm} (loading system can be operated simultaneously)
- 3rd control circuit electrically proportional serial (loading system can be operated together with 3rd control circuit)
- 4th control circuit additionally electrically proportional parallel (operation: via control wheel on the right of the joystick)
- High flow load sensing - double-acting power hydraulics {150 l/min}{39.6 gpm} (machine height +{30 mm}{1.18 in}!)
- Additional hydraulic oil cooler
- Pressureless return at front (incl. leak oil line)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

## Hydraulics in rear

- Pressureless return at rear
- 1x double-acting hydraulic connection at rear via changeover valve (two couplings SVK size 3)
- (3rd control circuit at front or rear) (Operation: via switch (0 - 1) in joystick console + 3rd control circuit)
- One rear hydraulic connection  $\{(51 \text{ l/min})\}\{(13.5 \text{ gpm})\}$  double-acting (two couplings SVK size 3) incl. separate control valve (operation: via switch (1 - 0 - 2) in joystick console)
- Two rear hydraulic connections  $\{(51 \text{ l/min})\}\{(13.5 \text{ gpm})\}$  double-acting (four couplings SVK Gr.3) incl. separate control valve (operation: 1 DW connection via switch (1 - 0 - 2), 1 DW connection via button (1 - 0 - 2))
- (Connections can be operated simultaneously)

## Bio-hydraulic oil

- Shell Panolin S4 HLP Synth46 (biohydraulic oil)

## Electrical connections in front

- Front socket 7-pin for lighting front attachments
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function push-button, 2nd Function latching)
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function latching, 2nd Function push-button)
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function push-button, 2nd Function push-button)
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function latching, 2nd Function latching)

## Electrical connections in rear

- Rear 7-pin socket for lighting rear attachments
- Rear 3-pin socket (operation: Via switch (1 - 0 - 2) in joystick console)

## Safety options

- Reversing warning device (acoustic)
- Immobilizer ignition key (via coded ignition key)

## Other

- Battery disconnect switch 2 circuits (disconnection of the on-board power supply and the generator via 2 switching paths from the battery)
- Hand lever grease press
- Combination bag (warning triangle / first aid kit)
- Set of tools
- Tool box
- Fully automatic central lubrication unit
- cardan shaft protection

## Warranty extension

- Economy 24 months (2500 h)
- Economy 36 months (3000 h)
- Economy 48 months (3500 h)
- Economy 60 months (4000 h)
- Premium 24 months (3000 h)
- Premium 36 months (4000 h)
- Premium 48 months (5000 h)
- Premium 60 months (6000 h)

## Custom-made paint finish

- Special painting RAL single color - instead of Weidemann red
- Special painting RAL multicolored

## Trailer and recovery equipment

- Trailer hitch {38 mm}{1.5 in}, automatic
- Trailer hitch {38 mm}{1.5 in}, automatic, height-adjustable
- Trailer hitch ball head K50, height-adjustable
- Trailer hitch Auto-Hitch

## Self-propelled work machines with ball hitch

- Trailer hitch {38 mm}{1.5 in}, automatic