

3090T

Telescopic wheel loaders

Technical data

Electrical system

Operating voltage	12 V
Battery	100 Ah
Alternator	120 A

Weights

Operating weight	5,730 - 5,980 kg
Thrusting force (max.)	5,000 - 5,200 daN
Thrust force (max.)	4,470 daN
Lift capacity (max.)	4,620 daN
Tipping load with bucket – machine straight, loading frame horizontal	3,450 - 3,610 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	3,010 - 3,170 kg
Tipping load with bucket – machine straight (extended)	1,910 - 2,010 kg
Tipping load with bucket – machine pivoted (extended)	1.650 - 1.750 kg
Tipping load with bucket - machine straight, loading frame in lowest position	4,630 - 4,840 kg
Tipping load with bucket - machine pivoted, loading frame in lowest position	4,050 - 4,260 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	3,110 - 3,250 kg
Tipping load with pallet fork – machine pivoted, loading frame horizontal	2,730 - 2,870 kg
Tipping load with pallet fork – machine straight (extended)	1,870 - 1,960 kg
Tipping load with pallet fork – machine pivoted (extended)	1,630 - 1,720 kg
Tipping load with pallet fork - machine straight, transport position	3,650 - 3,810 kg
Tipping load with pallet fork - machine pivoted, transport position	3,210 - 3,360 kg

Driver's cab

Driver's cab	Cab

Filling levels

Tank capacity for fuel	80 l
Tank capacity for hydraulic oil	32 l

Drive system

Type of drive	ecDrive (Electronic Controlled Drive)
drive unit	hydrostatic via the transfer box and the drive shaft
Speed levels	2
Axle	PA 1422
Travel speed Standard	0-20 km/h
Travel speed Option 1	0-30 km/h
Travel speed Option 2	0-40 km/h
Operating brake	Drum brake (option: multi-disc brakes)
Parking brake	Drum brake (option: multi-disc brakes)
Differential lock	100 % front axle + rear axle

Hydraulic system

Drive hydraulics working pressure (max.)	500 bar
Work hydraulics discharge volume (max.)	93 (95-101) l/min
Work hydraulics working pressure (max.)	235 bar

Kinematics

Kinematics type	Teleskoparm (Z-Kinematik)
Lifting cylinder	1
Tipping cylinder	1
Quick change system	hydraulic

Steering

Steering type	hydraulically activated articulated pendulum steering
Steering cylinder	1
Oscillating angle	± 10 degree

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2026 Weidemann | www.weidemann.de

Noise characteristic values

Average sound power level LwA (cabin)	99.5 dB(A)
Guaranteed sound power level LwA (cabin)	101 dB(A)
Specified sound pressure level LpA (cabin)	71 dB(A)


Standard engine data

Engine manufacturer	Rehlko
Motor type	KDI 2504 TCR
Cylinder	4
Drive output	55.4 kW
Drive output	75 PS
at max. rpm	2,300 U/min
Maximum torque	310 Nm
Cylinder capacity	2,482 cm³
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2026 Weidemann | www.weidemann.de

Dimensions

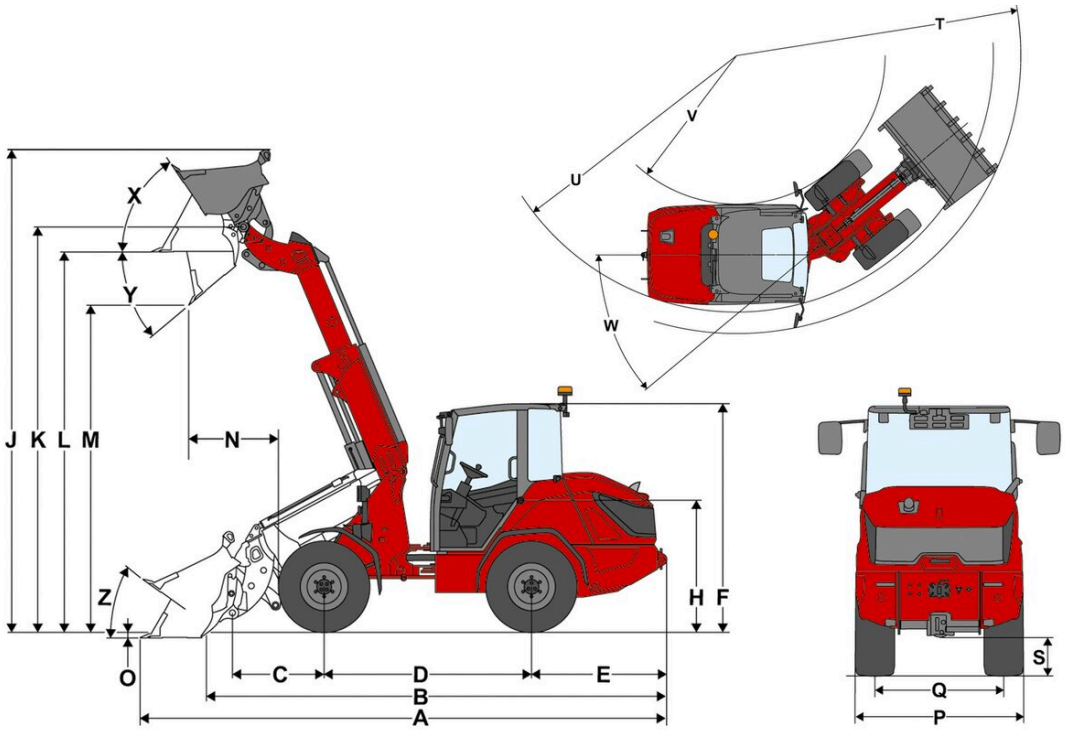

A	Total length	6,030 mm
B	Total length without bucket	5,160 mm
C	Bucket pivot point (to center of axle)	1,210 mm
D	Wheel base	2,325 mm
E	Rear overhang	1,435 mm
F	Height with cab	2,545 mm
H	Seat height	1,520 mm
J	Total working height	5,875 mm
K	Bucket pivot point (max. lift height)	4,985 mm
L	Load-over height	4,695 mm
M	Dumping height	4,085 mm
N	Reach (at M)	960 mm
O	Digging depth	110 mm
P	Total width	1,800 mm
Q	Track width	1,440 mm
S	Ground clearance	335 mm
T	Maximum external radius	4,675 mm
U	Radius on the outer edge	4,235 mm
V	Inner radius	2,295 mm
W	Articulation angle	40 °
X	Rollback angle at max. lift height	56 °
Y	Dumping angle maximal	40 °
Z	Rollback angle on ground	39 °

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2026 Weidemann | www.weidemann.de

Standard components

Engine

- Rehlko KDI 2504 TCR, 55,4 kW / 75 PS (DOC/DPF), EU: Stage V

Steering system

- Hydraulic articulated pendulum steering
- Steering cylinder: 1

Operator's cab

- 1-door cabin, incl. heating and ventilation
- Generous amount of space in all driver’s cabs
- Rearview mirrors (left and right)
- Ergonomically designed spacious entry
- 7-inch display incl. operation via Jog-Dial
- Adjustable steering column (tilt and height)
- Right armrest
- Heated rear windshield
- 1 socket: 3-pin 12V

Operator's seat

- Fabric seat, with mechanical suspension, safety belt, weight, backrest, and longitudinal adjustment

Lighting

- Lighting (halogen) compliant with StVZO road traffic regulations
- LED rear lights
- LED work lights, 2 front, 2 rear (1000 lm)

Drive system & Axles

- Axle: planetary axle PA1422
- Drive: Hydrostatic all-wheel drive, electronically controlled, ecDrive (Electronic Controlled Drive)
- Drive modes: Auto mode; ECO mode (reduction of engine speed when reaching the set speed)
- Differential lock: 100 %, electro-hydraulically controlled on the front and rear axles
- Speed: 20 km/h
- Speed stages: 2 | 10 km/h / 20 km/h
- Operating brake: Drum brake on front axle acting on rear axle via the driveshaft
- Parking brake: Drum brake - actuated using hand brake lever on the front axle, acting on the rear axle via the driveshaft

Tires

- 365 / 70 R 18 BKT Multimax MP 513 ET-10

Loading system

- Telescopic - loader unit LS999
- Hydraulic quickhitch facility (Weidemann HV / HT - C) hydraulic
- Kinematics: Z
- Lift cylinder: 1
- Tipping cylinder: 1
- Float position for lift cylinder

Hydraulics

- Electrically pilot-operated joystick with direction switch and integrated button for differential lock and proportional telescopic function
- 3rd front control circuit, electrically proportional (flow-sharing) via joystick, incl. continuous function
- Oil flow adjustment 3rd control circuit via Jog-Dial on the display
- Pressure release, 3rd front control circuit on the loader unit
- Joystick curve adjustment (loader unit sensitivity adjustable in 3 stages) via Jog-Dial on the display
- Hydraulic oil cooler

Other

- Exterior battery cut-off switch - mechanically isolating
- Fuel filler neck, right side in direction of travel

EquipCare (telematics)

- EquipCare 36 months

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2026 Weidemann | www.weidemann.de

Options

Operator's cab & Cabine

- Two-piece cab door
- Wide-angle rearview mirrors (left and right)
- Wide-angle rearview mirrors (left and right) electrically adjustable + heated
- Fabric seat; air suspension; MSG297A/722
- Fabric seat; air suspension; seat heating; seat ventilation MSG297A/722 Premium
- Armrest, right and left
- Headrest - operator's seat
- Air-conditioning system
- DAB+ radio-ready (aerial, speaker)
- Complete DAB+ radio
- 2 sockets: 2x USB / 3-pin
- Interior panoramic mirror
- Sunblind

Lighting

- LED lighting compliant with StVZO road traffic regulations
- LED Performance work lights (2000 lm) on roof, 2 front, 2 rear, on the telescopic arm, 2 front
- Active work lighting
- LED rotating beacon (orange), National regulations must be observed!

Approval & Road traffic

- Individual operating permit < 25 km/h
- Individual operating permit > 25 km/h
- Front and rear license plate bracket
- Triangular warning sign

Drive system & Axles

- Hand throttle
- Pre-heating: Coolant, hydraulic oil; 115 V, plug type B
- Pre-heating: Coolant, hydraulic oil; 230 V, plug type E/F
- Pre-heating: Coolant, hydraulic oil; 230 V, plug type J (country: CH)

Drive mode

- Drive mode: Auto / Eco / Attachments
- Drive mode: Auto / Eco / M-Drive

Driving speed

- 30 km/h
- 40 km/h Power Drive
- Proportional speed limiter (slow speed device)
- Thrust force limitation

Braking system

- Electro-hydraulic multi-disc brake, spring-applied on the front axle, acting on rear axle via the driveshaft, incl. hill-hold function

Tires

- 405 / 70 R 20 BKT Multimax MP 513 ET30, tread AS, width 1767 mm, height 2599 mm, 20/30/40 km/h
- 400 / 70 R 20 Trelleborg TH400 ET0, tread AS, width 1844 mm, height 2593 mm, 20/30/40 km/h
- 550 / 45 - 22.5 Alliance 331 ET-50, tread AS, width 2070 mm, height 2596 mm, 20/30/40 km/h
- 400 / 70 R 18 Alliance 585 ET0, tread EM, width 1824 mm, height 2569 mm, 20/30 km/h
- 445 / 70 R 19.5 Alliance 624 ET0, tread EM, width 1865 mm, height 2613 mm, 20/30/40 km/h
- 440 / 50 R 17 BKT TracSuper ET0, tread RP, width 1861 mm, height 2496 mm, 20 km/h

Loading system

- Load arm damping
- Loader unit assistance package (automatic bucket retraction, lift height limit, shake function, Tilt-in-Assist)
- Tipping cylinder lock and lowering throttle (working platform)

Quick-change plates

- Euro (hydraulic - ISO23206 EURO HV) (incl. 2x SVK size 3)
- SMS HV (hydraulic)
- Matbro (hydraulic)

Hydraulics

- Shell Panolin S4 HLP Synth46 (biodegradable hydraulic oil)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2026 Weidemann | www.weidemann.de

Hydraulics in front

- Front switch valve on 3rd control circuit (3rd control circuit with 4 couplings)
- Load Sensing - high-performance hydraulics 45 ccm (101 l/min)
- High Flow - high-performance hydraulics, single-acting (101 l/min)
- Unpressurized return line, front (1x Flatface size 3, plug) incl. overflow oil line (1x Flatface size 2, plug
- Front quick coupling on 4th control circuit (Flatface size 2)
- Front quick coupling on 3rd control circuit (SVK size 3)
- Front quick coupling on 4th control circuit (SVK size 3)

Hydraulics in rear

- Rear hydro connection double-acting (2x SVK size 3), operation: via switch (0 - 1) + 3rd control circuit
- Rear hydro connection double-acting via switch valve (2x SVK size 3), operation: via switch (0 - 1) + 3rd control circuit
- Rear hydro connection double-acting (2x SVK size 3) + double-acting via switch valve (2x SVK size 3)
- Unpressurized return line, rear (1x SVK size 3, plug) incl. overflow oil line (1x Flatface size 2, plug)

Electrical connections in rear

- Rear 3-pin socket, operation: via switch; 1st function latching, 2nd function latching

Electrical system

Battery cut-off switch
- Driver's cab battery cut-off switch - relay isolating
- 2-circuit battery cut-off switch (isolation of the onboard electrical system and alternator from the battery via 2 switching paths)

Safety options

- Reverse alarm (acoustic)
- Rear area monitoring
- Seat belt monitoring
- Rearview camera
- Immobilizer via ignition key, operation: via coded ignition key

Custom-made paint finish

- Special single-color RAL paint - instead of Weidemann red
- Special multicolor RAL paint

Other

- Toolbox incl. tool kit
- Combination bag (warning triangle / first aid kit)
- Fully automatic central lubrication system

Warranty extension
- Economy 24 months (2500 h)
- Economy 36 months (3000 h)
- Economy 48 months (3500 h)
- Economy 60 months (4000 h)
- Premium 24 months (3000 h)
- Premium 36 months (4000 h)
- Premium 48 months (5000 h)
- Premium 60 months (6000 h)

Trailer and recovery equipment

- Trailer hitch 38 mm, automatic
- Towing hitch (not approved for trailer use!)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2026 Weidemann | www.weidemann.de