



8085

Wheel loaders

COMFORTABLE AND EFFICIENT APPLICATION

The 8085 wheel loader of the 8 premium series by Kramer is setting new standards in terms of efficiency, performance, and comfort. The efficient drive and the four operating modes (Power, Eco, Road, CSD) enable individual drive settings in all work situations. As a result, the application can be performed as best possible, most cost-effectively, and efficiently. The one-piece chassis also ensures a high level of stability and great maneuverability for this machine.

Smart Attach: The fully-hydraulic quickhitch plate, installed as standard, makes it possible to comfortably hitch up hydraulic attachments without needing to exit the machine

ecospeed transmission: The optional ecospeed transmission enables continuous acceleration from 0 km/h to 40 km/h

Automatic load stabilizer: The dampening of vibrations in the lifting frame ensures a high degree of operational comfort

Comfortable cabin: With entry on both sides, as well as extensive glazing for the best 360° visibility

Fuel saving: By selecting the correct operating mode of the four available (Power, Eco, Road, CSD), it is possible to save up to 10% fuel

Technical Data

Standard engine data

| | |
|------------------------|-----------------------|
| Engine manufacturer | Deutz |
| Drive output | 55.4 kW |
| Drive output | 75 PS |
| Cylinder capacity | 2,924 cm ³ |
| Exhaust standard level | V |
| Exhaust aftertreatment | DOC / DPF |

Weights

| | |
|-----------------------------------|---------------------|
| Bucket capacity (standard bucket) | 0.85 m ³ |
| Payload (max.) | 1,530 kg |
| Operating weight | 4,600 - 5,200 kg |
| Payload (S=1.25) | 2,150 kg |
| Tipping load (standard bucket) | 3,650 kg |
| Tipping load (pallet fork) | 2,680 kg |

Filling levels

| | |
|---------------------------------|------|
| Tank capacity for fuel | 85 l |
| Tank capacity for hydraulic oil | 50 l |

Drive system

| | |
|-----------------------|------------------------------|
| Travel speed Standard | 0-20 km/h |
| Travel speed Option 1 | 0-30 km/h |
| Travel speed Option 2 | 0-40 km/h |
| Differential lock | 100 % front axle + rear axle |

Hydraulic system

| | |
|---|----------|
| Work hydraulics discharge volume (max.) | 70 l/min |
|---|----------|

Kinematics

| | |
|---------------------|---------------------------------------|
| Kinematics type | P |
| Quick change system | Kramer HV/WL-C; includes Smart Attach |


Steering

| | |
|---------------------|-----------|
| Steering angle max. | 40 degree |
|---------------------|-----------|

Noise characteristic values

| | |
|--|------------|
| Guaranteed sound power level L _{WA} (cabin) | 101 dB(A) |
| Measured sound power level L _{WA} | 99.4 dB(A) |
| Sound pressure level at the operator's ear | 74 dB(A) |

Dimensions

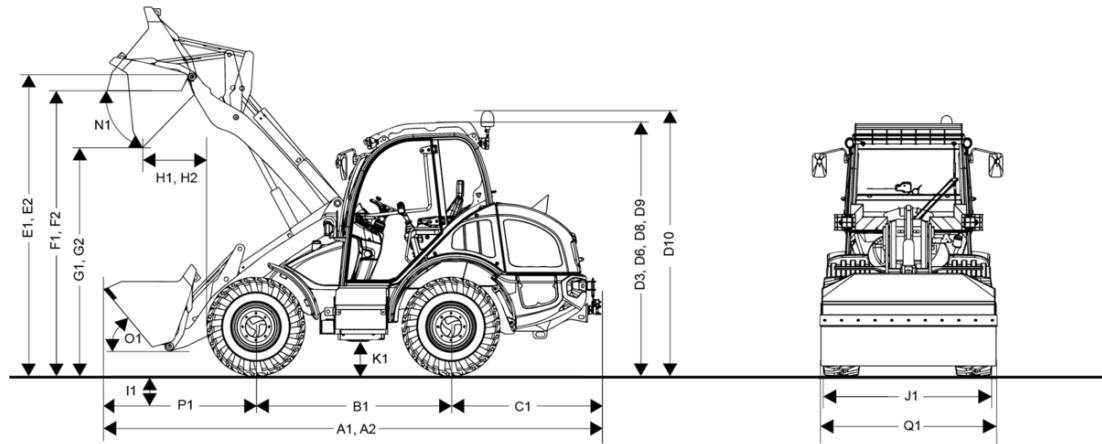

| | | |
|-----|---|----------|
| A1 | Total length with standard attachment | 5,359 mm |
| A2 | extended loading system | 5,665 mm |
| B1 | Wheel base center | 2,020 mm |
| C1 | Rear overhang | 1,490 mm |
| D3 | Height with cab | 2,490 mm |
| D6 | Height with air-conditioning system | 2,575 mm |
| D10 | Total height with rotating beacon | 2,765 mm |
| E1 | Max. height blade pivot point | 3,350 mm |
| E2 | Max. height of hinge pin height extended loading system | 3,500 mm |
| F1 | Load-over height | 3,200 mm |
| F2 | extended loading system | 3,350 mm |
| G1 | Dumping height | 2,680 mm |
| G2 | extended loading system | 2,810 mm |
| H1 | Dumping width | 540 mm |
| H2 | extended loading system | 730 mm |
| I1 | Digging depth | 45 mm |
| J1 | Total width | 1,780 mm |
| K1 | Ground clearance | 330 mm |
| L1 | Turning radius outer edge wheels | 2,840 mm |
| M1 | Steering angle | 40 ° |
| M2 | Swing angle | 22 ° |
| N1 | Dumping angle at max. lifting height | 41 ° |
| O1 | Dumping angle at ground level | 50 ° |
| P1 | Distance center front axle to tooth tip | 1,860 mm |
| Q1 | Bucket width | 1,950 mm |
| R1 | Stacking height | 3,130 mm |
| R2 | extended loading system | 3,280 mm |

Standard components

Cab

- Soundproofed, vibration-insulated, 4-point cab with large, thermal insulation glazing deep-drawn and rear window heating
- Entry and exit on both sides
- Comfort seat with mechanical suspension (MSG85/722), with automatic seat belt, weight, backrest and two-fold horizontal adjustment
- 3-stage powerful heating and ventilation, and defroster nozzles on the front windscreen
- Colour-coded rocker switch for hydraulic, electric, driving and safety features
- Telescoping and adjustable tilting steering column
- Joystick console (fold-down)
- Sun visor, interior mirror, 12 V plug receptacle, cab light, large, foldable outside rear-view mirror on both sides
- Windscreen wipers front and back, front with intermittent wipers
- Working lights 2x LED basic rear, working lights 2x LED basic front (1000 Lm)
- StVZO (German road traffic regulations) lighting
- Tested according to ROPS and FOPS I

Engine

- Battery isolator switch
- Visko fan
- Engine automatic stop

Power transmission

- Combined brake-inch pedal
- 100% self-locking differential connectible in the front axle
- Mechanical parking brake
- Lubrication line for pendulum pins

Steering and work hydraulics

- Hydrostatic all-wheel steering with emergency steering properties
- Electronic pilot-operated joystick for lifting / lowering and filling / emptying the loader unit with rocker switch for selecting the travel direction as well as integrated 3rd control circuit (proportional control) and functional lighting integrated into the joystick
- Pressure release of 3rd control circuit

Kinematics

- Smart Attach (fully-hydraulic quickhitch facility)
- Parallel kinematics
- Load hook on the tilt rod
- Visual position display for bucket and fork

Documentation

- Operator's manual, service manual

Options

Operator's cab & Cabine

- Cab with sliding window in left-side door glass
- Panoramic cab
- Air-sprung operator's seat with lumbar support and heated seat (MG95AL/722)
- Auxiliary heating
- Exterior mirrors, right and left heated
- Air-conditioning system
 - only in combination with:
 - Panoramic cab
- Document box
- Radio DAB+ ready (antenna, speaker)
- Radio system DAB+ reception (BT radio, antenna, speaker)
- 7" display + jog dial (incl. angle display, oil volume adjustment, automatic load stabilizer setting, tractive force regulation, joystick sensitivity)
- Bracket for cell phone + USB outlet
- Rear-view camera
 - only in combination with:
 - 7" display + jog dial (incl. angle display, oil volume adjustment, automatic load stabilizer setting, tractive force regulation, joystick sensitivity)

Lighting

- LED rotating beacon
- 4x LED Basic work lights at the front (1000 Lumen)
- 2x LED Basic work lights side-mounted (1000 Lumen)

Approval, road traffic

- License plate bracket (incl. license plate illumination)
 - includes:
 - License plate illumination
 - License plate bracket, front and rear
- Sidelights for special buckets incl side marker lights
- Data confirmation (ABE) for self-propelled work machine (standard)*
- EC Tractor CoC for Agricultural/Forestry Tractor Approval (LOF-ZGM-EG-Zulassung, 2003/37/EC – Class T1)
 - only in combination with:
 - License plate bracket (incl. license plate illumination)
 - Rear outlet 7-pole
 - An attachment coupling (not maneuvering hitch) must also be selected!
- EC Tractor CoC for Agricultural/Forestry Tractor Approval (LOF-ZGM-EG-Zulassung, 2003/37/EC – Class T1) + data confirmation – only for Germany
 - only in combination with:
 - License plate bracket (incl. license plate illumination)
 - Rear outlet 7-pole
 - An attachment coupling (not maneuvering hitch) must also be selected!

*Germany, Luxembourg, Netherlands, Austria, Slovakia, the Czech Republic, Switzerland, Estonia, Latvia, Lithuania, Hungary

Drive system & steering

- Automatic engine stop (standard)
- 100% Limited-slip differential switchable in the rear axle
- Ecospeed 40 km/h incl. Smart Driving
 - only in combination with:
 - License plate bracket (incl. license plate light)
 - Load stabilizer (vibration damper)
- Ecospeed 40 km/h incl. Smart Driving (throttled to 20 km/h)
 - only in combination with:
 - License plate bracket (incl. license plate light)
 - Load stabilizer (vibration damper)
- Hydrostatic 30km/h
 - only in combination with:
 - Load stabilizer (vibration damper)
 - License plate bracket (incl. license plate light)
- Driving mode Power-/Eco-/ Road-/ Pedal mode (incl. slow speed device and hand throttle)
- Steering mode Smart Steering
 - only in combination with:
 - 7" inch display + Jog Dial (incl. angle display, oil volume adjustment, setting of automatic load stabilizer, tractive force regulation, sensitivity of joystick)

Tires

Not possible with EC Tractor CoC for Agricultural/Forestry Tractor Approval (LOF-ZGM-EG-Zulassung, 2003/37/EC – Class T1)

- Mitas 340/80-20 (12.5-20) MPT-04 (standard)

Tires for EC tractor

Required for EC Tractor CoC for Agricultural/Forestry Tractor Approval (LOF-ZGM-EG-Zulassung, 2003/37/EC – Class T1)

- Firestone 405/70R18 Duraforce – multi-purpose profile
- Michelin 400/70 R18 BIBLOAD (restricted steering angle: 38°) – multi-purpose profile
- Alliance 340/80 R18 Multiuse 550 – municipal profile
- Alliance 380/75 R20 580 ETO – traction profile
- Michelin 400/70 R 18 XMCL ETO
- Nokian 360/80R20 TRI 2 – municipal profile (caution: no digging depth / reduced steering angle)
- Trelleborg 340/80R18 TH500 ETO

Loading system & Quick coupler system

- Load stabilizer (vibration damper)
- Loading system with increased lift height (payload and bucket volume reduced)
- Floating position
- Smart Attach (fully hydraulic quick coupler system); Kramer System HV/WL-C (standard)
- Hydraulic quick coupler system, EURO System (technical data and available attachments may differ)

Hydraulics

- Pre-heating package
 - includes:
 - Hydraulic oil pre-heating (230 V)
 - Coolant pre-heating (230V)
 - Fuel pre-heating (230 V)
- Filling of the hydraulic system with environmentally friendly and biodegradable hydraulic oil

Hydraulics - front area

- Front return line, unpressurized return + leak oil
- High flow; incl. 1 double-acting control circuit for positioning movements with attachment, incl. leak oil line and unpressurized return
 - Recommended:
 - Front outlet 7-pole (2 switch positions)
 - Driving mode Power/Eco/Road/Pedal mode (incl. low-speed control & manual throttle)
- Automatic bucket return
 - only in combination with:
 - 7" display + jog dial (incl. angle display, oil volume adjustment, automatic load stabilizer setting, tractive force regulation, joystick sensitivity)
- Shake function (vibratory function of the tipping cylinder)
 - only in combination with:
 - Automatic bucket return
 - 7" display + jog dial (incl. angle display, oil volume adjustment, automatic load stabilizer setting, tractive force regulation, joystick sensitivity)
- 4th control circuit for front add-on equipment with 2nd hydraulic function, proportional
- Tipping cylinder and lowering throttle for work platform preparation (ex-factory only, not retrofittable)
 - only in combination with:
 - Hose burst valve for lifting and tilting cylinders

Hydraulics - rear area

- Auxiliary control circuit for tipper (tipper connection)
- Auxiliary control circuit for tipper (for rear attachments, single-acting) including unpressurized return

Electrical system

- Rear outlet 7-pole
- Rear outlet 13-pole
- Front outlet 7-pole (2 switch positions)
- Rear outlet (DIN signal socket)
- Front outlet (30A)

Safety options

- Hose burst valve for lifting and tilting cylinders
- Reverse alarm (acoustic)
- Red/white warning stripes (in accordance with DIN 30710)
- EquipCare + Dual ID
 - not with:
 - Immobilizer system, integrated in the ignition switch key
- Immobilizer system, integrated in the ignition switch key
 - not with:
 - EquipCare + Dual ID
- Fire extinguisher (2 kg)
- Seatbelt monitoring with seatbelt alarm
- Orange safety belt (standard)
 - not with:
 - Air-sprung operator's seat with lumbar support and heated seat (MG95AL/722)

Paint

- Single-color RAL custom paint finish (gray parts not included)**
- Vehicle operation with corrosive agents (salt and fertilizer use)

** We reserve the right to decline paint finishes that exhibit similarities to protected colors or color combinations of other manufacturers!

Other

- (Fully automatic) central lubrication unit
 - not with:
 - Vehicle operation with corrosive agents (salt and fertilizer use)
- Central lubrication system (corrosive agents)
 - recommended with:
 - Vehicle operation with corrosive agents (salt and fertilizer use)
- Central lubrication point

Ball hitches & Brake systems

- Ball hitch attachment coupling (K50) – fixed to frame
- Automatic attachment coupling 38 mm – fixed to frame
- Mechanical attachment coupling 38 mm – fixed to frame
- Bearing block for attachment couplings height-adjustable (insert for attachment coupling required)
- Automatic 38 mm attachment coupling insert for trailer mount height-adjustable
- K50 ball hitch insert for trailer mount height-adjustable, only suitable for height-adjustable drawbars
- K50 ball hitch insert for trailer mount height-adjustable extended
- Mechanical attachment coupling insert – 32 mm for trailer mount height-adjustable
- Hydraulic trailer brake valve
 - only in combination with:
 - Ecospeed 40 km/h incl. Smart Driving
 - or:
 - Ecospeed 40 km/h incl. Smart Driving (limited to 20 km/h)

A front ballast weight is required to operate a trailer with the corresponding bearing load!

Extended warranties

- Security 24 (2000 h)
- Security 36 (3000 h)
- Security 48 (4000 h)
- Security 60 (5000 h)