



## TH625

### Telehandlers

#### Cost-efficient and powerful



The TH625 is the compact power pack with a lifting height of 236 in and a payload of 5,512 lb. The following features characterize the TH625 telehandler: Comfortable cab with excellent ergonomics and all-round visibility, electronically controlled travel drive with various travel modes, robust telescopic arm with excellent view of the attachment, wide range of options and a modern machine design. The transversely installed motor and the optimized arrangement of components ensure very good maintenance accessibility. The integrated driver assistance system VLS (Vertical Lift System) ensures safety and also increases operating comfort. The TH625 combines power, reliable hydraulics and compact dimensions with sophisticated technology and a convincing price-performance ratio.

### Highlights

- Entry-level price made to measure
- Electronically regulated drive system
- Flow Sharing
- Automatic bucket return and shaking function
- VLS (Vertical Lift System)

### Technical Data

#### Standard engine data

Engine manufacturer	Perkins
Motor type	404J-E22T
Cylinder	4
Drive output	45 kW
Drive output	60 HP
at max. rpm	2,400 rpm
Maximum torque	163.7 ft.lbs
Cylinder capacity	135.3 in <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF
Average sound power level LwA (cabin)	94 dB(A)
Guaranteed sound power level LwA (cabin)	97 dB(A)
Specified sound pressure level LpA (cabin)	70 dB(A)

#### Engine data Option 1

Engine manufacturer	Perkins
Motor type	404J-E22TA

Cylinder	4
Drive output	55 kW
Drive output	74 HP
at max. rpm	2,400 rpm
Maximum torque	199.1 ft.lbs
Cylinder capacity	135.3 in <sup>3</sup>
Type of coolant	Water/charge air
Exhaust aftertreatment	DOC/DPF
Average sound power level LwA (cabin)	95.6 dB(A)
Guaranteed sound power level LwA (cabin)	97 dB(A)
Specified sound pressure level LpA (cabin)	71 dB(A)

#### Electrical system

Operating voltage	12 V
Battery	77 Ah
Alternator	120 A

#### Weights

Payload (max.)	5,512 lb
Operating weight	10,252 lb

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

### ■ Driver's cab

Driver's cab	Cab
--------------	-----

### ■ Filling levels

Tank capacity for fuel	25.10 US gal
Tank capacity for hydraulic oil	7.66 US gal

### ■ Drive system

Type of drive	electronically controlled
drive unit	hydrostatic via transfer gearbox and universal joint shaft
Speed levels	2
Axle	PAL 1660
Travel speed Standard	0-12.43 mph
Travel speed Option 1	0-15.53 mph
Travel speed Option 2	0-21.75 mph
Operating brake	disc brake on front axle acting on rear axle via universal joint shaft
Parking brake	disc brake - actuation on front axle via handbrake lever, acting on rear axle via universal joint shaft
Differential lock	100 % front axle + rear axle

### ■ Hydraulic system

Drive hydraulics working pressure (max.)	6,817 psi
Work hydraulics discharge volume (max.)	19.81 gpm
Work hydraulics working pressure (max.)	3,626 psi

### ■ Kinematics

Lifting cylinder	1
Tipping cylinder	1
Quick change system	Mechanical (hydraulically activated)


### ■ Steering

Steering type	Hydrostatic all-wheel steering with end position synchronization
Steering cylinder	2
Steering angle max.	2x38 degree
Oscillating angle of the rear axle	± 8 degree

### ■ Other information

DPF = diesel particulate filter  
 DOC = diesel oxidation catalyst  
 SCR = selective catalytic reduction

## Dimensions

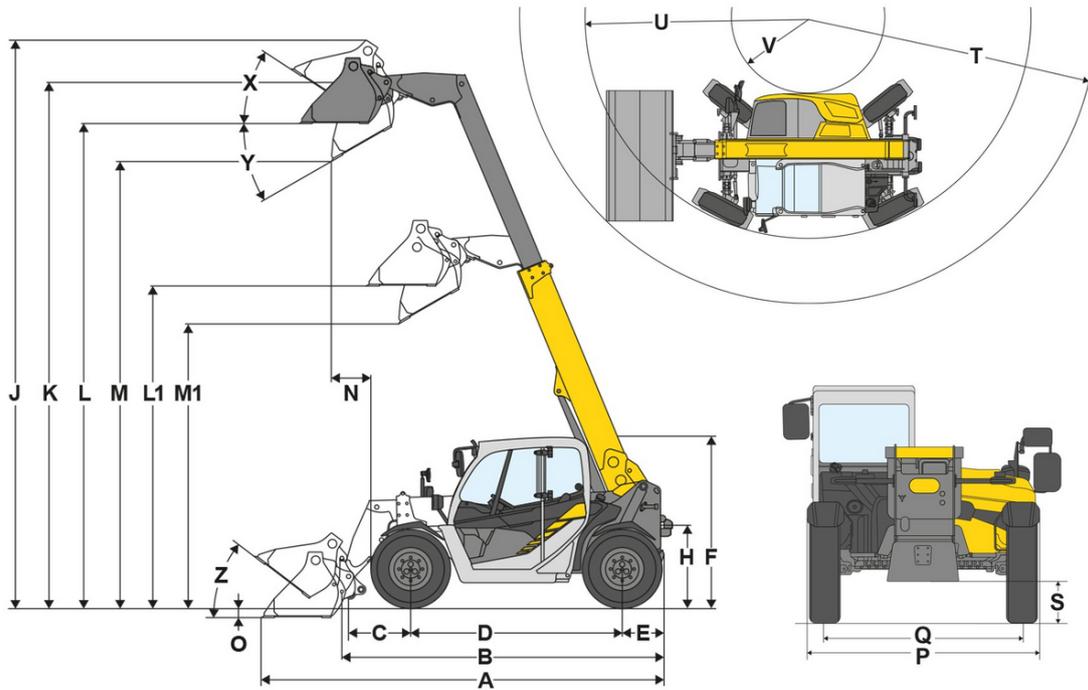

A	Total length	183.7 in
B	Total length without bucket	153.0 in
C	Bucket pivot point (to center of axle)	28.3 in
D	Wheel base	96.4 in
E	Rear overhang	19.2 in
F	Height with cab	78.5 in
H	Seat height	37.7 in
J	Total working height	260.6 in
K	Bucket pivot point (max. lift height)	241.1 in
L1	Load-over height telescopic arm retracted	147.5 in
L	Load-over height telescopic arm extended	222.1 in
M1	Dumping height telescopic arm retracted	130.2 in
M	Dumping height telescopic arm extended	204.8 in
N	Reach (at M)	17.9 in
O	Digging depth	4.8 in
P	Total width	74.8 in
Q	Track width	65.4 in
S	Ground clearance	11.2 in
T	Maximum radius	170.7 in
U	Radius on the outer edge	131.8 in
V	Inner radius	45.7 in
X	Rollback angle at max. lift height	34 °
Y	Dumping angle	30 °
Z	Rollback angle on ground	38 °