



## ET16

### Tracked Conventional Excavator

Best in class in terms of cabin size

In addition to its comfortable cabin, the ET16 also impresses with a compact and sturdy design. With a shipping weight of less than 1.6 metric tons, it can be quickly and easily transported from one construction site to the next. It is the ideal companion for any application due to the simple and safe operation. With the load-sensing hydraulic system (LUDV), the joystick movements always remain the same for the operator so that he can work comfortably and fatigue-free.

## Highlights

- Powerful drive system with LUDV
- Hydraulic telescopic travel gear with dozer blade extension
- Large ergonomic comfort cab
- Easy transportation by car trailer
- Hydraulic joystick operation

## Technical Data

### Hydraulic

Operating pressure hydraulics	200.0 bar
Hydraulic pump	• ZRP
Flow rate	33.0 l/min
Flow rate max.	35.0 l/min
Tank capacity	20.0 l

### Mechanical - Output Details

Travel speed	4.1 km/h
--------------	----------

### Mechanical Details

Length	3,644.0 mm
Width	990.0 mm
Height	2,285.0 mm
Operating weight (min.-max.)	1,529.0 - 1,842.0 kg
Digging depth (max.)	2,413.0 mm

### Engine

Cooling	• Water-cooling
Engine type	• Diesel engine

Cylinder	3.0
Cylinder capacity	1,116.0 cm <sup>3</sup>
Inclined position max.	30.0 °
Fuel	• HVO EN15940
Effective power	13.8 KW
Nominal Engine speed	2,200.0 1/min
Exhaust-gas limit	• EU Stage V
Battery capacity (nom. value)	44.0 Ah
Engine Manufacturer	• Yanmar
Engine Designation	• 3TNV76-XNSV

### Environment Data

Sound level LpA	79.0 dB(A)
Sound power LWA, guaranteed	93.0 dB(A)


### Chassis

Operating pressure	200.0 bar
--------------------	-----------

### Shipping and Storage

Shipping weight	1,402.0 kg
-----------------	------------

## Dimensions

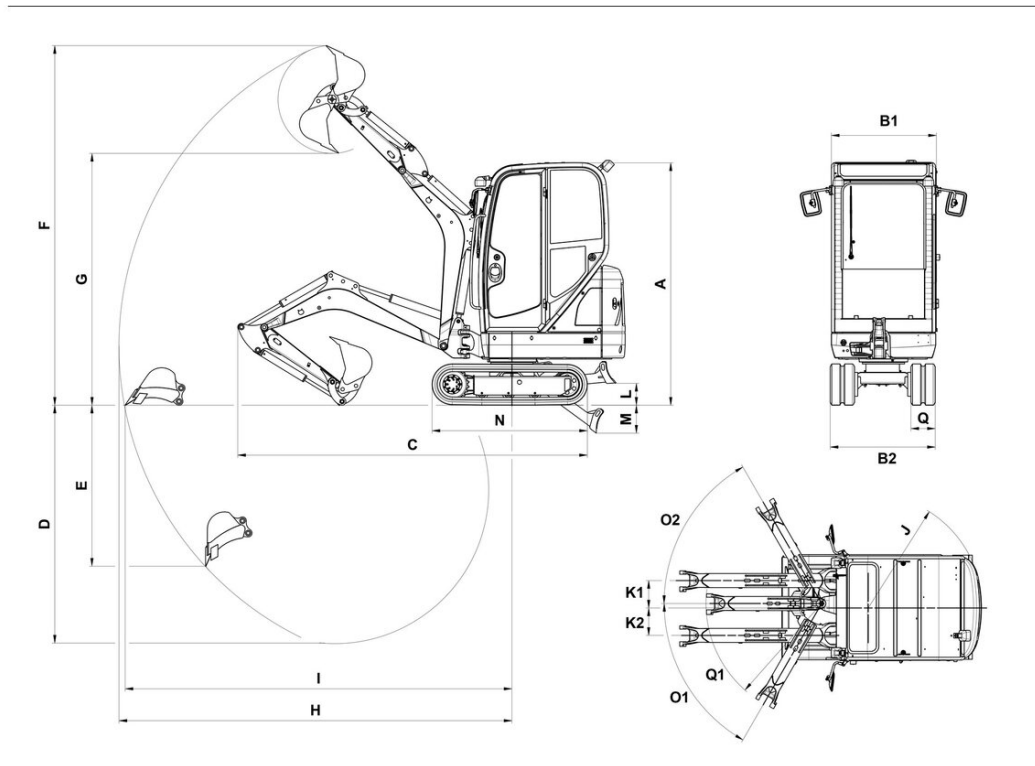

		Standardfahrwerk	Telescopic travel gear
A	Height of canopy	2,285 mm	2,317 mm
B1	Width of upper carriage	990 mm	990 mm
B2	Width travel gear	990 mm	1,298 mm
	Width travel gear retracted		990 mm
C	Transport length short shovel arm	3,644 mm	3,648 mm
	Transport length long shovel arm	3,607 mm	3,606 mm
D	Digging depth max., short shovel arm	2,242 mm	2,202 mm
	Digging depth max., long shovel arm	2,413 mm	2,372 mm
E	Piercing depth max., short shovel arm	1,642 mm	1,605 mm
	Piercing depth max., long shovel arm	1,802 mm	1,764 mm
F	Piercing height max., short shovel arm	3,387 mm	3,408 mm
	Piercing height max., long shovel arm	3,508 mm	3,529 mm
G	Dumping height max., short shovel arm	2,371 mm	2,396 mm
	Dumping height max., long shovel arm	2,493 mm	2,518 mm
H	Digging radius max., short shovel arm	3,700 mm	3,700 mm
	Digging radius max., long shovel arm	3,861 mm	3,860 mm
I	Max. reach at ground level (short shovel arm)	3,648 mm	3,642 mm
	Max. reach at ground level (long shovel arm)	3,811 mm	3,806 mm
J	Tail swing radius	1,075 mm	1,075 mm
K1	Boom offset max. (to center of bucket right side)	432 mm	432 mm
K2	Boom offset max. (to center of bucket left side)	287 mm	287 mm
M	Digging depth max. (dozer blade below surface)		270 mm
N	Length travel drive	1,462 mm	1,462 mm
O1	Max. swivel angle (arm system to the left)	73 °	73 °
O2	Max. swivel angle (arm system to the right)	49 °	49 °
Q1	Boom swing radius left	1,195 °	1,195 °
	Distance bucket dozer blade, short shovel arm	452 mm	362 mm
	Distance bucket dozer blade, long shovel arm	385 mm	295 mm