


# DT12

## Track Dumper

Works efficiently everywhere

The hydraulically activated and pilot-operated machine provides for overall simple operation, and the hydrostatic drive system make it a comfortable and durable machine for a variety of job site applications . Rubber tracks provide excellent weight distribution and low ground pressure even with a high payload. The extensive selection of skips, a low center of gravity and the suspension-mounted rollers make it an ideal material handler on all types of terrain.

## Highlights

- Hydrostatic drive
- Small dimensions

## Technical Data

### Hydraulic

| | |
|---|---|
| Hydraulicpump | Variable displacement and gear pump |
| Flow rate max. | 76.0 l/min |

### Mechanical - Output Details

| | |
|---|---|
| Travel speed | 4.0 km/h |

### Mechanical Details

| | |
|---|---|
| Length | 1,823.0 mm |
| Width | 790.0 mm |
| Height | 1,303.0 mm |
| Weight | 650.00 kg |
| Payload max. | 1,200.0 kg |
| Skip | Front tip skip |
| Skip capacity levelled | 393.0 l |
| Skip capacity heaped | 440.0 l |
| Operating weight (min.-max.) | 685.0 - 940.0 kg |

### Engine

| | |
|---|---|
| Engine type | Diesel engine |
| Cylinder | 3.0 |
| Cylinder capacity | 719.0 cm³ |
| Inclined position max. | 20.0 ° |
| Effective power | 12.0 kW |
| Nominal Engine speed | 2,700.0 1/min |
| Exhaust-gas limit | EU Stage V |
| Engine Manufacturer | Kubota |
| Engine Designation | D-722 |
| Stroke | 68.0 mm |
| Bore | 67.0 mm |

### Environment Data

| | |
|---|---|
| Sound level LpA | 88.0 dB(A) |
| Sound level LpA (Standard) | ISO 6396 |
| Sound power LWA, guaranteed | 101.0 dB(A) |
| Sound power LWA (Standard) | ISO 6395 |


### Shipping and Storage

| | |
|---|---|
| Shipping weight | 610.0 kg |

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.


Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com

## Dimensions

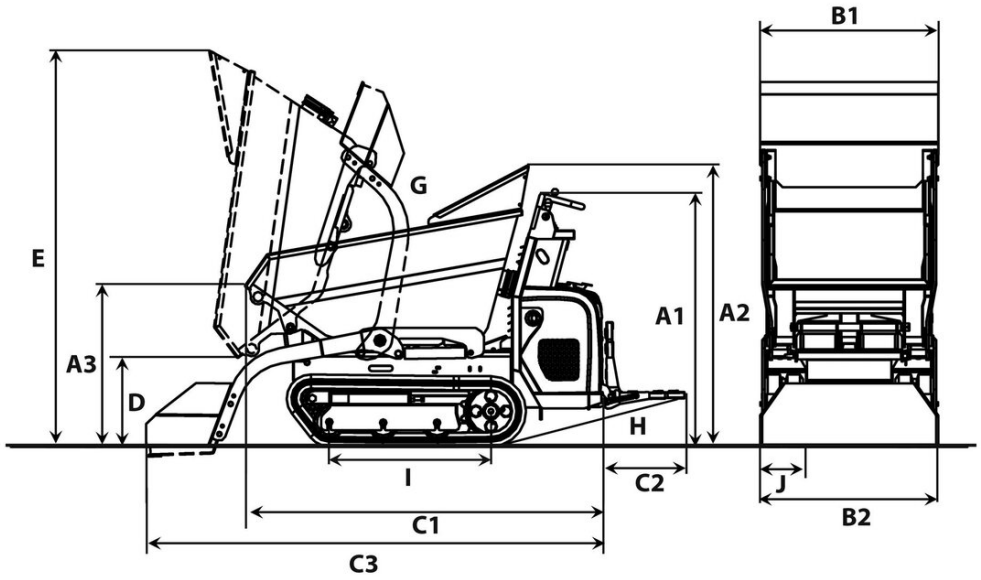


| | | Front tip skip | High tip skip | Swivel tip skip | Front tip platform |
|---|---|---|---|---|---|
| A1 | Height above operator's stand | 1,280 mm | 1,280 mm | 1,280 mm | 1,280 mm |
| A3 | Height front edge of skip | 812 mm | 1,110 mm | 1,060 mm | 850 mm |
| | Height front edge of high tip skip raised | | 1,715 mm | | |
| B1 | Width of upper carriage | 700 mm | 800 mm | 730 mm | 800 mm |
| | Width of skip | 830 mm | 830 mm | 782 mm | 800 mm |
| B2 | Width of undercarriage | 790 mm | 790 mm | 790 mm | 790 mm |
| C1 | Total length without footboard | 1,823 mm | 1,684 mm | 1,960 mm | 1,882 mm |
| C2 | Length footboard | 393 mm | 393 mm | 393 mm | 393 mm |
| C3 | Length with self-loading equipment, without footboard | 2,277 mm | 2,240 mm | | |
| D | Dumping height max. | 460 mm | 868 mm | 650 mm | 256 mm |
| | Dumping height max., high tip skip raised | | 1,467 mm | | |
| E | Skip height tilted | 1,950 mm | 2,009 mm | 2,112 mm | 1,430 mm |
| | Skip height tilted, high tip skip raised | | 2,610 mm | | |
| G | Dumping angle | 70 ° | 82 ° | 85 ° | 56 ° |
| H | Rollback angle footboard | 14 ° | 14 ° | 14 ° | 14 ° |
| I | Length chain stand | 875 mm | 875 mm | 875 mm | 875 mm |

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.


Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com