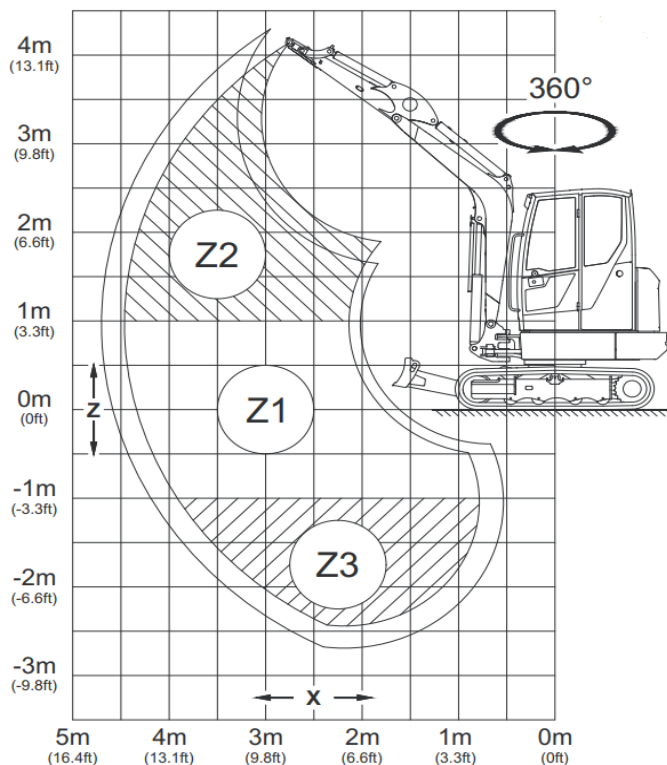




**WACKER
NEUSON**
all it takes!

Lifting force tables ET35



All table values are specified in kg (lbs.), in a horizontal position on a solid surface and without a bucket or an attachment.

If a bucket or other attachment is mounted, the lifting force or tipping load is reduced by the device's dead weight.

Base of calculation: according to ISO 10567.

The lifting force of the vehicle is limited by the settings of the pressure relief valves and hydraulic performance or by the tipping safety mechanism.

Neither 75% of the static tipping load nor 87% of the hydraulic lifting force are exceeded. The lifting force of the vehicle is limited by the hydraulic capacity or by the tilting safety mechanism.

Neither 75% of the static tipping load nor 87% of the hydraulic lifting force are exceeded.

Base of calculation: according to ISO 10567. Set pressure at the lifting arm cylinder: ET 24: 24000 kPa (3480 psi)

The lifting capability applies for vehicles under the following conditions:

- Lubricants and operating materials at the prescribed levels.
- Full fuel tank.
- Cabin
- Vehicle at operating temperature.
- Weight of the operator 75 kg (165 lbs.).

max	Permissible load with extended dipper stick
A	Outreach from middle of rotating assembly
B	Load hook height
*	Lifting force limited by hydraulics
	With or without dozer blade support in travel direction
	With or without dozer blade support 90° from the travel direction



**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

				4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B	 Blade down	 Blade up		 Blade down	 Blade up		 Blade down	 Blade up		 Blade down	 Blade up	
4,0 m (13'-1")	738* (1,627)*	738* (1,627)*	738* (1,627)*	- -	- -	- -	- -	- -	- -	- -	- -	- -
3,0 m (9'-10")	738* (1,626)*	577 (1,272)	624 (1,376)	- -	- -	- -	654* (1,443)*	654* (1,443)*	654* (1,443)*	- -	- -	- -
2,0 m (6'-7")	761* (1,677)*	478 (1,054)	517 (1,140)	758* (1,672)*	541 (1,193)	586 (1,291)	829* (1,828)*	829* (1,828)*	829* (1,828)*	1,065* (2,348)*	1,065* (2,348)*	1,065* (2,348)*
1,0 m (3'-3")	794* (1,752)*	444 (980)	481 (1,061)	851* (1,875)*	522 (1,151)	566 (1,248)	1,108* (2,443)*	787 (1,735)	859 (1,895)	2,041* (4,500)*	1,411 (3,112)	1,582 (3,487)
0,0 m (0'-0")	835* (1,841)*	454 (1,001)	492 (1,086)	920* (2,028)*	507 (1,117)	550 (1,213)	1,292* (2,848)*	750 (1,654)	822 (1,812)	2,233* (4,923)*	1,363 (3,005)	1,530 (3,374)
- 1,0 m - (3'-3")	877* (1,934)*	521 (1,148)	566 (1,247)	- -	- -	- -	1,276* (2,814)*	742 (1,636)	813 (1,792)	2,042* (4,502)*	1,369 (3,018)	1,536 (3,388)
- 2,0 m - (6'-7")	886* (1,953)*	754 (1,662)	824 (1,817)	- -	- -	- -	912* (2,011)*	766 (1,690)	838 (1,848)	1,510* (3,330)*	1,406 (3,100)	1,510* (3,330)*

Tab.1: Lifting force table ET35-STD, short dipper stick, rubber track, without additional rear weight


					4,0 m (13'-1'')			3,0 m (9'-10'')			2,0 m (6'-7'')		
A B													
	Blade down		Blade up		Blade down		Blade up		Blade down		Blade up		
	4,0 m	669*	669*	669*	-	-	-	588*	588*	588*	-	-	-
	(13'-1'')	(1,475)*	(1,475)*	(1,475)*	-	-	-	(1,297)*	(1,297)*	(1,297)*	-	-	-
	3,0 m	672*	514	556	650*	549	594	721*	721*	721*	-	-	-
	(9'-10'')	(1,482)*	(1,134)	(1,227)	(1,434)*	(1,211)	(1,310)	(1,590)*	(1,590)*	(1,590)*	-	-	-
	2,0 m	697*	433	469	689*	539	583	726*	726*	726*	-	-	-
	(6'-7'')	(1,537)*	(955)	(1,034)	(1,520)*	(1,188)	(1,286)	(1,600)*	(1,600)*	(1,600)*	-	-	-
	1,0 m	730*	404	438	798*	516	560	1,020*	786	859	1,797*	1,435	1,607
(3'-3'')	(1,609)*	(891)	(967)	(1,759)*	(1,138)	(1,236)	(2,250)*	(1,734)	(1,894)	(3,963)*	(3,164)	(3,544)	
0,0 m	769*	411	446	891*	496	540	1,245*	741	813	2,206*	1,347	1,515	
(0'-0'')	(1,697)*	(905)	(983)	(1,965)*	(1,095)	(1,191)	(2,745)*	(1,634)	(1,792)	(4,865)*	(2,971)	(3,340)	
- 1,0 m	813*	462	503	881*	490	534	1,283*	726	797	2,115*	1,341	1,508	
(-3'-3'')	(1,792)*	(1,020)	(1,109)	(1,943)*	(1,081)	(1,177)	(2,830)*	(1,600)	(1,757)	(4,663)*	(2,958)	(3,326)	
- 2,0 m	843*	626	683	-	-	-	1,055*	740	811	1,692*	1,371	1,540	
(-6'-7'')	(1,859)*	(1,381)	(1,507)	-	-	-	(2,326)*	(1,631)	(1,789)	(3,731)*	(3,024)	(3,396)	

Tab.2: Lifting force table ET35-STD, long dipper stick, rubber track, without additional rear weight



**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

				4,0 m (13'-1'')			3,0 m (9'-10'')			2,0 m (6'-7'')		
A B	 Blade down	 Blade up		 Blade down	 Blade up		 Blade down	 Blade up		 Blade down	 Blade up	
4,0 m (13'-1'')	738* (1,627)*	738* (1,627)*	738* (1,627)*	- -	- -	- -	- -	- -	- -	- -	- -	- -
3,0 m (9'-10'')	738* (1,626)*	646 (1,424)	697 (1,537)	- -	- -	- -	654* (1,443)*	654* (1,443)*	654* (1,443)*	- -	- -	- -
2,0 m (6'-7'')	761* (1,677)*	538 (1,187)	581 (1,280)	758* (1,672)*	607 (1,339)	656 (1,446)	829* (1,828)*	829* (1,828)*	829* (1,828)*	1065* (2,348)*	1,065* (2,348)*	1,065* (2,348)*
1,0 m (3'-3'')	794* (1,752)*	502 (1,107)	542 (1,196)	851* (1,875)*	588 (1,298)	636 (1,403)	1,108* (2,443)*	882 (1,946)	962 (2,121)	2,041* (4,500)*	1,582 (3,489)	1,769 (3,901)
0,0 m (0'-0'')	835* (1,841)*	514 (1,133)	556 (1,226)	920* (2,028)*	573 (1,263)	620 (1,368)	1,292* (2,848)*	846 (1,865)	924 (2,037)	2,233* (4,923)*	1,534 (3,382)	1,718 (3,788)
- 1,0 m - (3'-3'')	877* (1,934)*	589 (1,298)	638 (1,407)	- -	- -	- -	1,276* (2,814)*	837 (1,846)	915 (2,018)	2,042* (4,502)*	1,540 (3,395)	1,724 (3,802)
- 2,0 m - (6'-7'')	886* (1,953)*	848 (1,869)	886* (1,953)*	- -	- -	- -	912* (2,011)*	862 (1,900)	912* (2,011)*	1,510* (3,330)*	1,510* (3,330)*	1,510* (3,330)*

Tab.3: Lifting force table ET35 STD, short dipper stick, rubber track, with additional rear weight

					4,0 m (13'-1'')			3,0 m (9'-10'')			2,0 m (6'-7'')		
A B													
	Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		
	4,0 m (13'-1'')	669* (1,475)*	669* (1,475)*	669* (1,475)*	-	-	-	588* (1,297)*	588* (1,297)*	588* (1,297)*	-	-	-
	3,0 m (9'-10'')	672* (1,482)*	578 (1,273)	623 (1,375)	650* (1,434)*	615 (1,357)	650* (1,434)*	721* (1,590)*	721* (1,590)*	721* (1,590)*	-	-	-
	2,0 m (6'-7'')	697* (1,537)*	489 (1,079)	529 (1,166)	689* (1,520)*	605 (1,334)	654 (1,441)	726* (1,600)*	726* (1,600)*	726* (1,600)*	-	-	-
	1,0 m (3'-3'')	730* (1,609)*	459 (1,011)	496 (1,094)	798* (1,759)*	583 (1,284)	631 (1,391)	1,020* (2,250)*	882 (1,944)	961 (2,120)	1,797* (3,963)*	1,606 (3,540)	1,795 (3,958)
	0,0 m (0'-0'')	769* (1,697)*	467 (1,029)	505 (1,114)	891* (1,965)*	563 (1,241)	610 (1,346)	1,245* (2,745)*	837 (1,845)	915 (2,018)	2,206* (4,865)*	1,518 (3,348)	1,702 (3,754)
	- 1,0 m (-3'-3'')	813* (1,792)*	525 (1,158)	569 (1,255)	881* (1,943)*	557 (1,227)	604 (1,332)	1,283* (2,830)*	821 (1,811)	899 (1,982)	2,115* (4,663)*	1,512 (3,335)	1,696 (3,740)
	- 2,0 m (-6'-7'')	843* (1,859)*	707 (1,560)	770 (1,698)	-	-	-	1,055* (2,326)*	835 (1,842)	914 (2,014)	1,692* (3,731)*	1,542 (3,400)	1,692* (3,731)*

Tab.4: Lifting force table ET35 STD, long dipper stick, rubber track, with additional rear weight



**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		738* (1,627)*	738* (1,627)*	738* (1,627)*	-	-	-	-	-	-	-	-	-
3,0 m (9'-10")		738* (1,627)*	598 (1,319)	648 (1,428)	-	-	-	654* (1,443)*	654* (1,443)*	654* (1,443)*	-	-	-
2,0 m (6'-7")		761* (1,677)*	496 (1,094)	538 (1,185)	758* (1,672)*	562 (1,238)	608 (1,341)	829* (1,828)*	829* (1,828)*	829* (1,828)*	1,065* (2,348)*	1,065* (2,348)*	1,065* (2,348)*
1,0 m (3'-3")		794* (1,752)*	462 (1,019)	501 (1,105)	851* (1,875)*	543 (1,196)	589 (1,299)	1,108* (2,443)*	816 (1,800)	893 (1,968)	2,041* (4,500)*	1,464 (3,228)	1,643 (3,622)
0,0 m (0'-0")		835* (1,841)*	472 (1,042)	513 (1,131)	920* (2,028)*	527 (1,162)	573 (1,263)	1,292* (2,848)*	780 (1,719)	855 (1,885)	2,233* (4,923)*	1,415 (3,121)	1,591 (3,509)
- 1,0 m (-3'-3")		877* (1,934)*	542 (1,194)	589 (1,299)	-	-	-	1,276* (2,814)*	771 (1,700)	846 (1,866)	2,042* (4,502)*	1,421 (3,134)	1,597 (3,522)
- 2,0 m (-6'-7")		886* (1,953)*	783 (1,726)	857 (1,889)	-	-	-	912* (2,011)*	796 (1,755)	872 (1,922)	1,510* (3,330)*	1,458 (3,215)	1,510* (3,330)*

Tab.5: Lifting force table ET35 STD, short dipper stick, steel track, without additional rear weight

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		669* (1,475)*	669* (1,475)*	669* (1,475)*	-	-	-	588* (1,297)*	588* (1,297)*	588* (1,297)*	-	-	-
3,0 m (9'-10")		672* (1,482)*	534 (1,177)	578 (1,275)	650* (1,434)*	570 (1,256)	617 (1,360)	721* (1,590)*	721* (1,590)*	721* (1,590)*	-	-	-
2,0 m (6'-7")		697* (1,537)*	450 (993)	488 (1,077)	689* (1,520)*	559 (1,233)	606 (1,337)	726* (1,600)*	726* (1,600)*	726* (1,600)*	-	-	-
1,0 m (3'-3")		730* (1,609)*	421 (928)	457 (1,008)	798* (1,759)*	537 (1,183)	583 (1,286)	1,020* (2,250)*	816 (1,798)	892 (1,968)	1,797* (3,963)*	1,487 (3,279)	1,668 (3,678)
0,0 m (0'-0")		769* (1,697)*	428 (944)	465 (1,026)	891* (1,965)*	517 (1,140)	563 (1,241)	1,245* (2,745)*	771 (1,699)	846 (1,865)	2,206* (4,865)*	1,400 (3,087)	1,576 (3,474)
- 1,0 m (-3'-3")		813* (1,792)*	482 (1,062)	525 (1,157)	881* (1,943)*	511 (1,126)	557 (1,228)	1,283* (2,830)*	755 (1,665)	830 (1,830)	2,115* (4,663)*	1,394 (3,074)	1,569 (3,461)
- 2,0 m (-6'-7")		843* (1,859)*	651 (1,436)	712 (1,569)	-	-	-	1,055* (2,326)*	769 (1,696)	845 (1,862)	1,692* (3,731)*	1,424 (3,139)	1,601 (3,530)

Tab.6: Lifting force table ET35 STD, long dipper stick, steel track, without additional rear weight



**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		738* (1,627)*	738* (1,627)*	738* (1,627)*	-	-	-	-	-	-	-	-	-
3,0 m (9'-10")		738* (1,627)*	667 (1,471)	721 (1,589)	-	-	-	654* (1,443)*	654* (1,443)*	654* (1,443)*	-	-	-
2,0 m (6'-7")		761* (1,677)*	557 (1,227)	601 (1,326)	758* (1,672)*	628 (1,384)	679 (1,496)	829* (1,828)*	829* (1,828)*	829* (1,828)*	1,065* (2,348)*	1,065* (2,348)*	1,065* (2,348)*
1,0 m (3'-3")		794* (1,752)*	520 (1,147)	562 (1,240)	851* (1,875)*	609 (1,342)	659 (1,454)	1,108* (2,443)*	912 (2,010)	995 (2,194)	2,041* (4,500)*	1,635 (3,605)	1,830 (4,036)
0,0 m (0'-0")		835* (1,841)*	532 (1,174)	576 (1,271)	920* (2,028)*	593 (1,308)	643 (1,418)	1,292* (2,848)*	875 (1,930)	957 (2,111)	2,233* (4,923)*	1,586 (3,498)	1,779 (3,923)
- 1,0 m (-3'-3")		877* (1,934)*	610 (1,344)	661 (1,458)	-	-	-	1,276* (2,814)*	867 (1,911)	948 (2,091)	2,042* (4,502)*	1,592 (3,510)	1,785 (3,936)
- 2,0 m (-6'-7")		886* (1,953)*	876 (1,933)	886* (1,953)*	-	-	-	912* (2,011)*	891 (1,965)	912* (2,011)*	1,510* (3,330)*	1,510* (3,330)*	1,510* (3,330)*

Tab.7: Lifting force table ET35 STD, short dipper stick, steel track, with additional rear weight


					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		669* (1,475)*	669* (1,475)*	669* (1,475)*	-	-	-	588* (1,297)*	588* (1,297)*	588* (1,297)*	-	-	-
3,0 m (9'-10")		672* (1,482)*	597 (1,316)	645 (1,423)	650* (1,434)*	636 (1,402)	650* (1,434)*	721* (1,590)*	721* (1,590)*	721* (1,590)*	-	-	-
2,0 m (6'-7")		697* (1,537)*	507 (1,117)	548 (1,208)	689* (1,520)*	625 (1,379)	676 (1,492)	726* (1,600)*	726* (1,600)*	726* (1,600)*	-	-	-
1,0 m (3'-3")		730* (1,609)*	475 (1,048)	515 (1,135)	798* (1,759)*	603 (1,329)	654 (1,441)	1,020* (2,250)*	911 (2,009)	995 (2,193)	1,797* (3,963)*	1,658 (3,656)	1,797* (3,963)*
0,0 m (0'-0")		769* (1,697)*	484 (1,067)	525 (1,157)	891* (1,965)*	583 (1,286)	633 (1,396)	1,245* (2,745)*	866 (1,910)	948 (2,091)	2,206* (4,865)*	1,571 (3,463)	1,763 (3,888)
- 1,0 m (-3'-3")		813* (1,792)*	544 (1,200)	591 (1,303)	881* (1,943)*	577 (1,272)	627 (1,383)	1,283* (2,830)*	850 (1,875)	932 (2,055)	2,115* (4,663)*	1,565 (3,450)	1,757 (3,875)
- 2,0 m (-6'-7")		843* (1,859)*	732 (1,614)	798 (1,760)	-	-	-	1,055* (2,326)*	865 (1,906)	947 (2,088)	1,692* (3,731)*	1,595 (3,516)	1,692* (3,731)*

Tab.8: Lifting force table ET35 STD, long dipper stick, steel track, with additional rear weight




**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
													
4,0 m (13'-1")		713* (1,572)*	713* (1,572)*	713* (1,572)*	-	-	-	698* (1,540)*	698* (1,540)*	698* (1,540)*	-	-	-
3,0 m (9'-10")		716* (1,578)*	585 (1,289)	641 (1,414)	-	-	-	640* (1,412)*	640* (1,412)*	640* (1,412)*	-	-	-
2,0 m (6'-7")		739* (1,630)*	491 (1,082)	539 (1,188)	740* (1,632)*	559 (1,233)	614 (1,354)	823* (1,815)*	823* (1,815)*	823* (1,815)*	1,106* (2,439)*	1,106* (2,439)*	1,106* (2,439)*
1,0 m (3'-3")		772* (1,703)*	460 (1,015)	506 (1,117)	831* (1,833)*	540 (1,191)	594 (1,310)	1,093* (2,410)*	811 (1,788)	899 (1,982)	2,022* (4,459)*	1,452 (3,202)	1,651 (3,641)
0,0 m (0'-0")		812* (1,791)*	474 (1,046)	523 (1,152)	892* (1,967)*	525 (1,158)	579 (1,277)	1,151* (2,538)*	776 (1,712)	863 (1,903)	2,156* (4,755)*	1,412 (3,114)	1,609 (3,548)
- 1,0 m (-3'-3")		852* (1,879)*	550 (1,213)	607 (1,339)	-	-	-	1,224* (2,700)*	770 (1,698)	857 (1,889)	1,951* (4,302)*	1,420 (3,132)	1,618 (3,567)
- 2,0 m (-6'-7")		853* (1,880)*	823 (1,816)	853* (1,880)*	-	-	-	-	-	-	1,395* (3,075)*	1,395* (3,075)*	1,395* (3,075)*

Tab.9: Lifting force table ET35 – VDS, short dipper stick, rubber track, without additional rear weight

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
													
4,0 m (13'-1")		642* (1,415)*	642* (1,415)*	642* (1,415)*	-	-	-	555* (1,224)*	555* (1,224)*	555* (1,224)*	-	-	-
3,0 m (9'-10")		653* (1,439)*	522 (1,152)	573 (1,265)	628* (1,384)	569 (1,254)	624 (1,376)	537* (1,185)*	537* (1,185)*	537* (1,185)*	-	-	-
2,0 m (6'-7")		677* (1,493)*	446 (983)	490 (1,080)	675* (1,488)*	556 (1,227)	611 (1,348)	724* (1,596)*	724* (1,596)*	724* (1,596)*	-	-	-
1,0 m (3'-3")		710* (1,565)*	419 (924)	462 (1,018)	782* (1,723)*	534 (1,177)	588 (1,297)	1,011* (2,229)*	809 (1,785)	898 (1,979)	1,804* (3,977)*	1,472 (3,245)	1,673 (3,689)
0,0 m (0'-0")		748* (1,650)*	429 (947)	474 (1,045)	867* (1,912)*	515 (1,135)	569 (1,254)	1,216* (2,681)*	767 (1,691)	854 (1,882)	2,142* (4,723)*	1,395 (3,076)	1,592 (3,510)
- 1,0 m (-3'-3")		790* (1,742)*	488 (1,076)	539 (1,189)	843* (1,859)*	510 (1,125)	564 (1,244)	1,237* (2,727)*	753 (1,661)	840 (1,852)	2,028* (4,472)*	1,392 (3,070)	1,589 (3,504)
- 2,0 m (-6'-7")		816* (1,800)*	676 (1,491)	750 (1,653)	-	-	-	982* (2,166)*	771 (1,700)	858 (1,891)	1,585* (3,495)*	1,425 (3,143)	1,585* (3,495)*

Tab.10: Lifting force table ET35 - VDS, long dipper stick, rubber track, without additional rear weight



**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

				4,0 m (13'-1''			3,0 m (9'-10''			2,0 m (6'-7''		
A B												
4,0 m (13'-1'')	713* (1,572)*	713* (1,572)*	713* (1,572)*	- -	- -	- -	698* (1,540)*	698* (1,540)*	698* (1,540)*	- -	- -	- -
3,0 m (9'-10'')	716* (1,578)*	652 (1,438)	713 (1,572)	- -	- -	- -	640* (1,412)*	640* (1,412)*	640* (1,412)*	- -	- -	- -
2,0 m (6'-7'')	739* (1,630)*	551 (1,214)	602 (1,328)	740* (1,632)*	625 (1,379)	684 (1,509)	823* (1,815)*	823* (1,815)*	823* (1,815)*	1106* (2,439)*	1,106* (2,439)*	1,106* (2,439)*
1,0 m (3'-3'')	772* (1,703)*	518 (1,143)	568 (1,252)	831* (1,833)*	606 (1,337)	665 (1,465)	1,093* (2,410)*	906 (1,998)	1,001 (2,207)	2,022* (4,459)*	1,623 (3,578)	1,839 (4,055)
0,0 m (0'-0'')	812* (1,791)*	535 (1,179)	587 (1,293)	892* (1,967)*	591 (1,304)	649 (1,432)	1,151* (2,538)*	872 (1,923)	965 (2,129)	2,156* (4,755)*	1,583 (3,490)	1,797 (3,962)
- 1,0 m -(3'-3'')	852* (1,879)*	619 (1,366)	681 (1,501)	- -	- -	- -	1,224* (2,700)*	866 (1,909)	959 (2,114)	1,951* (4,302)*	1,591 (3,508)	1,805 (3,981)
- 2,0 m -(6'-7'')	853* (1,880)*	853* (1,880)*	853* (1,880)*	- -	- -	- -	- -	- -	- -	1,395* (3,075)*	1,395* (3,075)*	1,395* (3,075)*

Tab.11: Lifting force table ET35 – VDS, short dipper stick, rubber track, with additional rear weight

				4,0 m (13'-1''			3,0 m (9'-10''			2,0 m (6'-7''		
A B												
4,0 m (13'-1'')	642* (1,415)*	642* (1,415)*	642* (1,415)*	- -	- -	- -	555* (1,415)*	555* (1,415)*	555* (1,415)*	- -	- -	- -
3,0 m (9'-10'')	653* (1,439)*	585 (1,290)	640 (1,410)	628* (1,384)*	628* (1,384)*	628* (1,384)*	537* (1,185)*	537* (1,185)*	537* (1,185)*	- -	- -	- -
2,0 m (6'-7'')	677* (1,493)*	502 (1,106)	549 (1,211)	675* (1,488)*	623 (1,373)*	675* (1,488)*	724* (1,596)*	724* (1,596)*	724* (1,596)*	- -	- -	- -
1,0 m (3'-3'')	710* (1,565)*	474 (1,045)	519 (1,145)	782* (1,723)*	600 (1,323)	659 (1,452)	1,011* (2,229)*	905 (1,995)	1,000 (2,205)	1,804* (3,977)*	1,642 (3,621)	1,804* (3,977)*
0,0 m (0'-0'')	748* (1,650)*	486 (1,071)	533 (1,176)	867* (1,912)*	581 (1,281)	639 (1,409)	1,216* (2,681)*	862 (1,901)	956 (2,108)	2,142* (4,723)*	1,566 (3,453)	1,780 (3,924)
- 1,0 m (-3'-3'')	790* (1,742)*	552 (1,216)	607 (1,338)	843* (1,859)*	576 (1,271)	634 (1,399)	1,237* (2,727)*	849 (1,872)	942 (2,078)	2,028* (4,472)*	1,563 (3,447)	1,777 (3,918)
- 2,0 m (-6'-7'')	816* (1,800)*	760 (1,676)	816* (1,800)*	- -	- -	- -	982* (2,166)*	866 (1,910)	960 (2,117)	1,585* (3,495)*	1,585* (3,495)*	1,585* (3,495)*

Tab.12: Lifting force table ET35 – VDS, long dipper stick, rubber track, with additional rear weight



**WACKER
NEUSON**
all it takes!

Lifting force tables ET35

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		713* (1,572)*	713* (1,572)*	713* (1,572)*	-	-	-	698* (1,540)*	698* (1,540)*	698* (1,540)*	-	-	-
3,0 m (9'-10")		716* (1,578)*	605 (1,335)	665 (1,465)	-	-	-	640* (1,412)*	640* (1,412)*	640* (1,412)*	-	-	-
2,0 m (6'-7")		739* (1,630)*	509 (1,123)	559 (1,234)	740* (1,632)*	580 (1,278)	637 (1,404)	823* (1,815)*	823* (1,815)*	823* (1,815)*	1,106* (2,439)*	1,106* (2,439)*	1,106* (2,439)*
1,0 m (3'-3")		772* (1,703)*	478 (1,055)	526 (1,161)	831* (1,833)*	560 (1,235)	617 (1,361)	1,093* (2,410)*	840 (1,853)	932 (2,055)	2,022* (4,459)*	1,504 (3,317)	1,712 (3,776)
0,0 m (0'-0")		812* (1,791)*	493 (1,087)	543 (1,198)	892* (1,967)*	545 (1,203)	602 (1,327)	1,151* (2,538)*	806 (1,777)	896 (1,977)	2,156* (4,755)*	1,465 (3,230)	1,670 (3,683)
- 1,0 m (-3'-3")		852* (1,879)*	572 (1,260)	631 (1,392)	-	-	-	1,224* (2,700)*	799 (1,763)	890 (1,962)	1,951* (4,302)*	1,473 (3,247)	1,679 (3,701)
- 2,0 m (-6'-7")		853* (1,880)*	853* (1,880)*	853* (1,880)*	-	-	-	-	-	-	1,395* (3,075)*	1,395* (3,075)*	1,395* (3,075)*

Tab.13: Lifting force table ET35 – VDS, short dipper stick, steel track, without additional rear weight

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		642* (1,415)*	642* (1,415)*	642* (1,415)*	-	-	-	555* (1,224)*	555* (1,224)*	555* (1,224)*	-	-	-
3,0 m (9'-10")		653* (1,439)*	542 (1,194)	595 (1,312)	628* (1,384)*	589 (1,299)	628* (1,384)*	537* (1,185)*	537* (1,185)*	537* (1,185)*	-	-	-
2,0 m (6'-7")		677* (1,493)*	463 (1,021)	509 (1,123)	675* (1,488)*	577 (1,272)	634 (1,399)	724* (1,596)*	724* (1,596)*	724* (1,596)*	-	-	-
1,0 m (3'-3")		710* (1,565)*	436 (961)	481 (1,060)	782* (1,723)*	554 (1,222)	611 (1,347)	1,011* (2,229)*	839 (1,850)	931 (2,053)	1,804* (3,977)*	1,524 (3,360)	1,734 (3,823)
0,0 m (0'-0")		748* (1,650)*	447 (985)	493 (1,087)	867* (1,912)*	535 (1,180)	592 (1,304)	1,216* (2,681)*	796 (1,755)	887 (1,956)	2,142* (4,723)*	1,447 (3,192)	1,653 (3,644)
- 1,0 m (-3'-3")		790* (1,742)*	508 (1,119)	561 (1,238)	843* (1,859)*	531 (1,170)	587 (1,294)	1,237* (2,727)*	783 (1,726)	873 (1,925)	2,028* (4,472)*	1,445 (3,186)	1,650 (3,638)
- 2,0 m (-6'-7")		816* (1,800)*	702 (1,548)	779 (1,717)	-	-	-	982* (2,166)*	800 (1,764)	891 (1,965)	1,585* (3,495)*	1,478 (3,259)	1,585* (3,495)*

Tab.14: Lifting force table ET35 – VDS, long dipper stick, steel track, without additional rear weight



**WACKER
NEUSON**
all it takes!

Hubkrafttabellen ET35

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		713* (1,572)*	713* (1,572)*	713* (1,572)*	-	-	-	698* (1,540)*	698* (1,540)*	698 (1,540)*	-	-	-
3,0 m (9'-10")		716* (1,578)*	673 (1,484)	716* (1,578)	-	-	-	640* (1,412)*	640* (1,412)*	640* (1,412)*	-	-	-
2,0 m (6'-7")		739* (1,630)*	569 (1,255)	623 (1,373)	740* (1,632)*	646 (1,424)	707 (1,559)*	823* (1,815)*	823* (1,815)*	823* (1,815)*	1,106* (2,439)*	1,106* (2,439)*	1,106* (2,439)*
1,0 m (3'-3")		772* (1,703)*	536 (1,183)	588 (1,296)	831* (1,833)*	627 (1,382)	687 (1,516)	1,093* (2,410)*	936 (2,063)	1,034 (2,280)	2,022* (4,459)*	1,675 (3,694)	1,900 (4,190)
0,0 m (0'-0")		812* (1,791)*	553 (1,220)	607 (1,339)	892* (1,967)*	612 (1,349)	672 (1,482)	1,151* (2,538)*	901 (1,987)	999 (2,202)	2,156* (4,755)*	1,635 (3,606)	1,858 (4,097)
- 1,0 m (-3'-3")		852* (1,879)*	641 (1,413)	704 (1,553)	-	-	-	1,224* (2,700)*	895 (1,973)	992 (2,188)	1,951 (4,302)*	1,644 (3,624)	1,866 (4,115)
- 2,0 m (-6'-7")		853* (1,880)*	853* (1,880)*	853* (1,880)*	-	-	-	-	-	-	1,395* (3,075)*	1,395* (3,075)*	1,395* (3,075)*

Tab.15: Lifting force table ET35 – VDS, short dipper stick, steel track, with additional rear weight

					4,0 m (13'-1")			3,0 m (9'-10")			2,0 m (6'-7")		
A B													
		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up		Blade down	Blade up	
4,0 m (13'-1")		642* (1,415)*	642* (1,415)*	642* (1,415)*	-	-	-	555* (1,224)*	555* (1,224)*	555* (1,224)*	-	-	-
3,0 m (9'-10")		653* (1,439)*	604 (1,332)	653* (1,439)*	628* (1,384)*	628* (1,384)*	628* (1,384)*	537* (1,185)*	537* (1,185)*	537* (1,185)*	-	-	-
2,0 m (6'-7")		677* (1,493)*	519 (1,144)	569 (1,254)	675* (1,488)*	643 (1,418)	675* (1,488)*	724* (1,596)*	724* (1,596)*	724* (1,596)*	-	-	-
1,0 m (3'-3")		710* (1,565)*	490 (1,081)	538 (1,187)	782* (1,723)*	620 (1,368)	681 (1,502)	1,011* (2,229)*	934 (2,060)	1,011* (2,229)*	1,804* (3,977)*	1,695 (3,737)	1,804* (3,977)*
0,0 m (0'-0")		748* (1,650)*	503 (1,110)	553 (1,219)	867* (1,912)*	601 (1,326)	662 (1,459)	1,216* (2,681)*	892 (1,966)	989 (2,181)	2,142* (4,723)*	1,618 (3,568)	1,841 (4,058)
- 1,0 m (-3'-3")		790* (1,742)*	571 (1,259)	628 (1,386)	843* (1,859)*	597 (1,316)	657 (1,449)	1,237* (2,727)*	878 (1,937)	975 (2,151)	2,028* (4,472)*	1,616 (3,563)	1,838 (4,052)
- 2,0 m (-6'-7")		816* (1,800)*	786 (1,733)	816* (1,800)*	-	-	-	982* (2,166)*	896 (1,975)	982* (2,166)*	1,585* (3,495)*	1,585* (3,495)*	1,585* (3,495)*

Tab.16: Lifting force table ET35 – VDS, long dipper stick, steel track, with additional rear weight