



## DT12

### Track Dumper

Works efficiently everywhere

The hydraulically activated and pilot-operated machine provides for overall simple operation, and the hydrostatic drive system make it a comfortable and durable machine for a variety of job site applications. Rubber tracks provide excellent weight distribution and low ground pressure even with a high payload. The extensive selection of skips, a low center of gravity and the suspension-mounted rollers make it an ideal material handler on all types of terrain.

### Highlights

- Hydrostatic drive
- Small dimensions
- Plastic skip

### Technical Data

#### ■ Mechanical - Output Details

Gradeability	62.0 %
Travel speed	4.2 km/h
Travel speed (Option)	9.0 km/h


Payload max.	1,200.0 kg
Skip	Swivel skip
Skip capacity levelled	418.0 l
Skip capacity heaped	505.0 l

#### ■ Mechanical Details

Length	2,072.0 mm
Width	790.0 mm
Height	1,303.0 mm
Weight	750.00 kg

■ Engine	
Engine type	Gasoline engine
Effective power	17.2 KW
Nominal Engine speed	3,600.0 1/min

## Dimensions

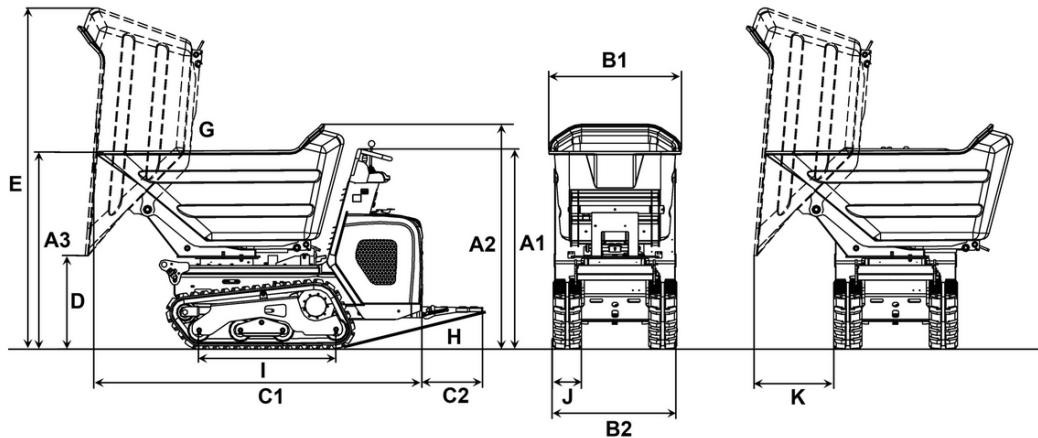

		Front tip skip	High tip skip	Swivel tip skip	Front tip skip platform	Plastic skip
A1	Height above operator's stand	1,280 mm	1,280 mm	1,280 mm	1,280 mm	
A2	Height over skip hand guard					1,437 mm
B1	Width of skip	830 mm	830 mm	782 mm	800 mm	845 mm
B2	Width of undercarriage	790 mm	790 mm	790 mm	790 mm	790 mm
C1	Total length without footboard	1,823 mm	1,735 mm	1,960 mm	1,882 mm	2,072 mm
C2	Length footboard	393 mm	393 mm	393 mm	393 mm	393 mm
C3	Length with self-loading equipment, without footboard	2,277 mm				
D	Dumping height max.	460 mm	813 mm		256 mm	597 mm
	Dumping height max., high tip skip raised		1,418 mm			
E	Skip height tilted	1,950 mm	2,100 mm	2,153 mm	1,430 mm	2,180 mm
	Skip height tilted, high tip skip raised		2,710 mm			
G	Dumping angle	70 °	83 °	85 °	56 °	85 °
H	Rollback angle footboard	14 °	14 °	14 °	14 °	14 °
I	Length chain stand	875 mm	875 mm	875 mm	875 mm	875 mm
K	Dumping width lateral			487 mm		