



## WL95

### Wheel Loader

Work comfortably and safer

The WL95 wheel loader offers the operator maximum working comfort: a large and comfortable cab, a multi-function joystick and simple hydraulic oil volume adjustment via jog dial. The roominess and overall layout of the cab, as well as the ergonomically arranged operating controls, allow for safer and fatigue-free work. The machine is equipped with the variable hydrostatic transmission ecospeed Pro, which is just as compact and energy-efficient as traditional drive systems, but achieves significantly higher tractive forces and travel speeds. The WL95 accelerates variably and evenly with ecospeed Pro and up to 40 km/h without interruptions in tractive force.

### Highlights

- Eco Speed Pro: continuously variable hydrostatic transmission
- {30/40 km/h}{18.64/24.85 mph} speed
- Automatic air-conditioning system
- Clear 7-inch digital display
- Joystick console spring-mounted on the operator's seat

### Technical Data

#### Standard engine data

Engine manufacturer	Deutz
Motor type	TCD 3.6 S5
Cylinder	4
Drive output	100 kW
Drive output	136 PS
at max. rpm	2,300 U/min
Cylinder capacity	3,621 cm <sup>3</sup>
Type of coolant	Water/charge air
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF/SCR

#### Engine data Option 1

Engine manufacturer	Deutz
Motor type	TCD 4.1 S5
Cylinder	4
Drive output	115 kW
Drive output	156 PS
at max. rpm	2,300 U/min
Cylinder capacity	4,038 cm <sup>3</sup>
Type of coolant	Water/charge air

Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF/SCR

#### Electrical system

Operating voltage	12 V
Battery	185 Ah
Alternator	120 A

#### Weights

Bucket capacity (standard bucket)	1.55 m <sup>3</sup>
Operating weight	10,390 kg
Tipping load with bucket – machine straight, loading frame horizontal	6,529 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	5,748 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	5,371 kg
Tipping load with pallet fork – machine pivoted, loading frame horizontal	4,728 kg

#### Driver's cab

Driver's cab	Cab
--------------	-----

#### Filling levels

Tank capacity for fuel	140 l
------------------------	-------

Tank capacity for hydraulic oil 125 l

Tank capacity for urea solution 12 l

### ■ Drive system

Type of drive Hydrostatic

drive unit universal joint shaft

Speed levels 3

Axle PA 1900

Travel speed Standard 0-20 km/h

Travel speed Option 1 0-30 km/h

Travel speed Option 2 0-40 km/h

Operating brake Multi-disc brake on front axle acting on rear axle via universal joint shaft

Parking brake Electro-hydraulic multi-disc brakes with spring suspension in the front axle acting on rear axle via articulated universal joint shaft

Differential lock 100 % front axle + rear axle

### ■ Hydraulic system

Drive hydraulics working pressure (max.) 480 bar

Work hydraulics discharge volume (max.) 150 (180) l/min

Work hydraulics working pressure (max.) 250 bar

### ■ Kinematics

Kinematics type Z

Lifting cylinder 2

Tipping cylinder 1

Quick change system hydraulic

### ■ Steering

Steering type Hydraulic articulated steering with oscillating axle

Steering cylinder 2

Oscillating angle of the rear axle  $\pm 12$  degree

### ■ Noise characteristic values

Average sound power level L<sub>WA</sub> (cabin) 100.7 dB(A)


Guaranteed sound power level L<sub>WA</sub> (cabin) 102 dB(A)

Specified sound pressure level L<sub>pA</sub> (cabin) 70 dB(A)

### ■ Other information

FSD = overhead guard  
DPF = diesel particulate filter  
DOC = diesel oxidation catalyst  
SCR = selective catalytic reduction  
Tipping load calculation pursuant to ISO 14397

## Dimensions

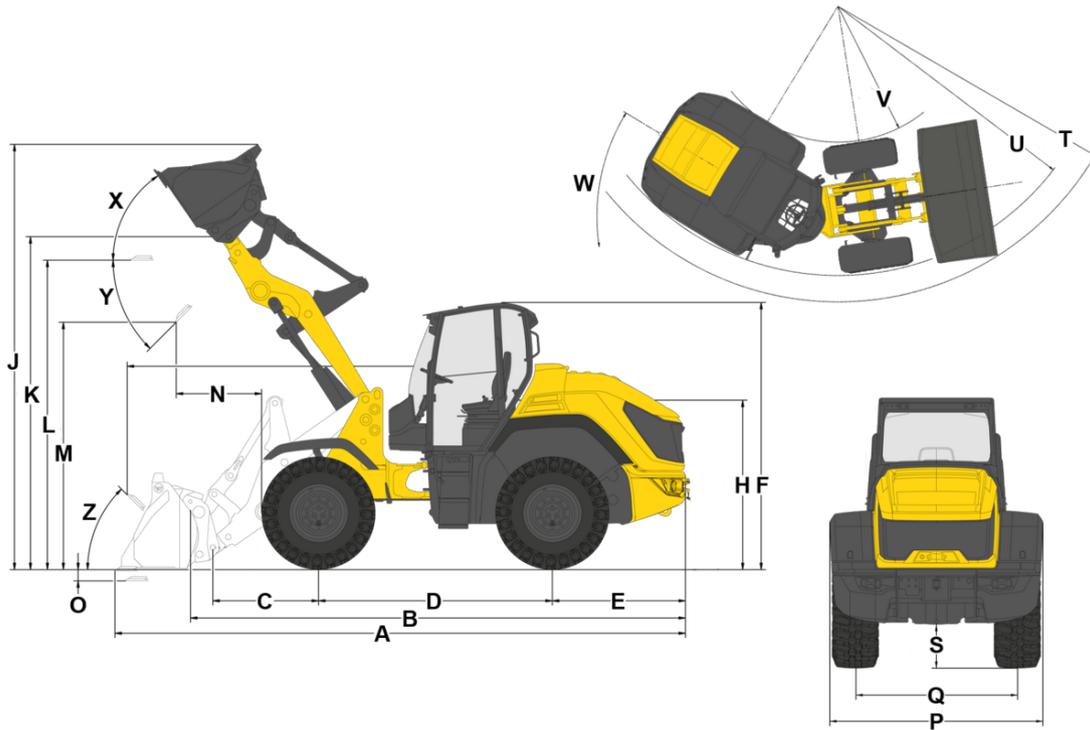

A	Total length	6,470 mm
B	Total length without bucket	5,610 mm
C	Bucket pivot point (to center of axle)	1,200 mm
D	Wheel base	2,660 mm
E	Rear overhang	1,520 mm
F	Height with cab	3,060 mm
H	Seat height	1,940 mm
J	Total working height	4,780 mm
K	Bucket pivot point (max. lift height)	3,820 mm
L	Load-over height	3,550 mm
M	Dumping height	2,860 mm
N	Reach (at M)	970 mm
O	Digging depth	136 mm
P	Total width	2,390 mm
Q	Track width	1,820 mm
S	Ground clearance	500 mm
T	Maximum external radius	5,370 mm
U	Radius on the outer edge	4,900 mm
V	Inner radius	2,450 mm
W	Articulation angle	40 °
X	Rollback angle at max. lift height	61 °
Y	Dumping angle	45 °
Z	Rollback angle on ground	45 °