



ET24

Tracked Conventional Excavator

The generalist of its class

The ET24 combines the advantages of the lighter weight classes with the power rating of the 2.5-metric ton class. Due to this, it has more lift capacity at a low weight and compact dimensions. This makes it strong and flexible in transport as well as when changing positions. The high excavating and tractive power increases the machine's productivity, saving time simultaneously. The powerful drive system, together with the intelligent cooling system, allow efficient working cycles, even at high ambient temperatures. Thanks to the generously arranged cab design, the operator has enough freedom of movement for head and legs. The ergonomic seat, individually adjustable, also makes fatigue-free working possible. A variety of options is available for the ET24. The excavator can thus be configured completely according to the customer's requirements.

Highlights

- Innovative front windshield system
- Comfortable, fully glazed cab
- Powerful drive system
- VDS Vertical Digging System
- Hydraulically pilot-controlled travel pedals

Technical Data


Н١	/di	aı	ıli	_

Trydradiic				
Operating pressure hydraulics	240.0 bar			
Hydraulicpump	Double variable and 2 gear pumps			
Flow rate	78.0 l/min			
Flow rate max.	78.0 l/min			
Tank capacity	19.0			
Mechanical - Output Details				
Travel speed	4.0 km/h			
Mechanical Details				
Length	4,022.0 mm			
Width	1,400.0 mm			
Height	2,392.0 mm			
Operating weight (minmax.)	2,200.0 - 2,746.0 kg			
Digging depth (max.)	2,602.0 mm			
Engine				
Cooling	Water-cooling			
Engine type	Diesel engine			

Cylinder	3.0	
Cylinder capacity	1,116.0 cm3	
Inclined position max.	30.0 °	
Fuel	HVO EN15940	
Effective power	13.8 KW	
Nominal Engine speed	2,200.0 1/min	
Exhaust-gas limit	EU Stage V	
Battery capacity (nom. value)	44.0 Ah	
Engine Manufacturer	Yanmar	
Engine Designation	3TNV76-XNSV	
Engine Designation Environment Data	3TNV76-XNSV	
	3TNV76-XNSV 93.0 dB(A)	
Environment Data		
Environment Data Sound power LWA, guaranteed		
Environment DataSound power LWA, guaranteedChassis	93.0 dB(A)	
Environment DataSound power LWA, guaranteedChassisOperating pressure	93.0 dB(A)	

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Dimensions

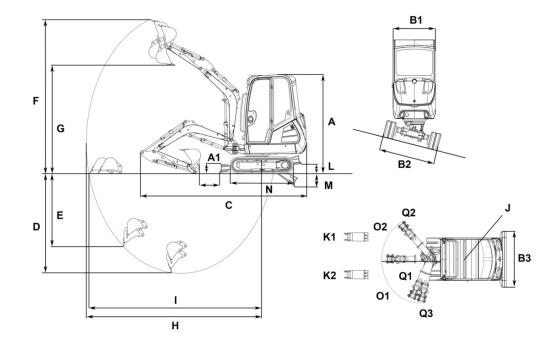

			VDS
Α	Height with cab	2,392 mm	2,472 mm
A1	Height of dozer blade	300 mm	300 mm
Α	Total height with rotating beacon	2,578 mm	2,657 mm
B1	Width of upper carriage	990 mm	990 mm
B2	Width travel gear	1,400 mm	1,400 mm
В3	Width of dozer blade	1,400 mm	1,400 mm
С	Transport length	4,022 mm	3,980 mm
D	Digging depth max., short shovel arm	2,402 mm	2,323 mm
	Digging depth max., long shovel arm	2,602 mm	2,523 mm
Е	Piercing depth max., short shovel arm	1,562 mm	1,482 mm
	Piercing depth max., long shovel arm	1,746 mm	1,667 mm
F	Piercing height max., short shovel arm	3,949 mm	4,028 mm
	Piercing height max., long shovel arm	4,071 mm	4,151 mm
G	Dumping height max., short shovel arm	2,748 mm	2,827 mm
	Dumping height max., long shovel arm	2,870 mm	2,950 mm
Н	Digging radius max., short shovel arm	4,146 mm	4,146 mm
	Digging radius max., long shovel arm	4,334 mm	4,334 mm
I	Max. reach at ground level (short shovel arm)	4,020 mm	3,995 mm
	Max. reach at ground level (long shovel arm)	4,216 mm	4,204 mm
J	Tail swing radius	1,169 mm	1,169 mm
K1	Boom offset max. (to center of bucket right side)	516 mm	516 mm
K2	Boom offset max. (to center of bucket left side)	359 mm	359 mm
L	Stacking height max. (dozer blade above surface)	294 mm	348 mm
М	Digging depth max. (dozer blade below surface)	334 mm	316 mm
N	Length travel drive	1,838 mm	1,838 mm
01	Max. swivel angle (arm system to the left)	77 °	77 °
02	Max. swivel angle (arm system to the right)	48 °	48 °
Q1	Boom swing radius center	1,666 mm	1,666 mm
Q2	Boom swing radius right	1,582 mm	1,582 mm
Q3	Boom swing radius left	1,356 mm	1,356 mm