





ET18

Tracked Conventional Excavator

Overall performance that's impressive

With the excavator ET18, Wacker Neuson sets new standards in the 1.7 to 2.4 metric ton class. The combination of time-tested and proven elements and intelligent development approaches are demonstrated in the extra performance and efficiency. Well thought-out features such as a large cabin and the two-part front windshield mechanism also increase the operator's comfort.

Highlights

- Hydraulic joystick operation
- Powerful drive system
- Hydraulic telescopic travel gear with dozer blade extension
- VDS Vertical Digging System
- Second cabin door for entry and exit on both sides

Technical Data


Hydraulic

Operating pressure hydraulics	200.0 bar	
Hydraulicpump	Double variable and 2 gear pumps	
Flow rate	73.0 l/min	
Flow rate max.	73.0 l/min	
Tank capacity	19.0	
Mechanical - Output Details		
Travel speed	5.3 km/h	
Mechanical Details		
Length	3,854.0 mm	
Width	990.0 mm	
Height	2,289.0 mm	
Operating weight (minmax.)	1,725.0 - 2,405.0 kg	
Digging depth (max.)	2,402.0 mm	
Engine		
Cooling	Water-cooling	
Engine type	Diesel engine	

Cylinder	3.0
Cylinder capacity	1,116.0 cm3
Inclined position max.	30.0 °
Fuel	HVO EN15940
Effective power	13.8 KW
Nominal Engine speed	2,200.0 1/min
Exhaust-gas limit	EU Stage V
Battery capacity (nom. value)	44.0 Ah
Engine Manufacturer	Yanmar
Engine Designation	
Engine Designation	3TNV76-XNSV
 Environment Data 	3TNV76-XNSV
	93.0 dB(A)
Environment Data	
Environment Data Sound power LWA, guaranteed	
Environment DataSound power LWA, guaranteedChassis	93.0 dB(A)
Environment DataSound power LWA, guaranteedChassisOperating pressure	93.0 dB(A)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Dimensions

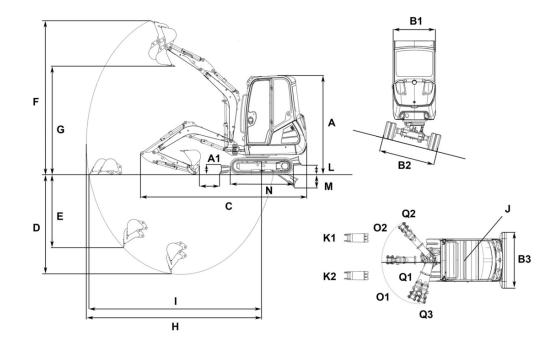

Α	Height with cab	2,285 mm
	Height of canopy	2,289 mm
Α	Total height with rotating beacon	2,470 mm
B1	Width of upper carriage	990 mm
B2	Width travel gear	1,300 mm
	Width travel gear retracted	990 mm
В3	Width of dozer blade	990 mm
С	Transport length	3,854 mm
D	Digging depth max., short shovel arm	2,202 mm
	Digging depth max., long shovel arm	2,402 mm
Е	Piercing depth max., short shovel arm	1,415 mm
	Piercing depth max., long shovel arm	1,600 mm
F	Piercing height max., short shovel arm	3,447 mm
	Piercing height max., long shovel arm	3,558 mm
G	Dumping height max., short shovel arm	2,510 mm
	Dumping height max., long shovel arm	2,621 mm
Н	Digging radius max., short shovel arm	3,802 mm
	Digging radius max., long shovel arm	3,989 mm
- 1	Max. reach at ground level (short shovel arm)	3,700 mm
	Max. reach at ground level (long shovel arm)	3,894 mm
J	Tail swing radius	1,169 mm
K1	Boom offset max. (to center of bucket right side)	516 mm
K2	Boom offset max. (to center of bucket left side)	359 mm
M	Digging depth max. (dozer blade below surface)	311 mm
Ν	Length travel drive	1,462 mm
01	Max. swivel angle (arm system to the left)	77 °
02	Max. swivel angle (arm system to the right)	48 °
Q1	Boom swing radius center	1,584 mm
Q2	Boom swing radius right	1,501 mm
Q3	Boom swing radius left	1,279 mm