



3060 Wheel loaders

Technical Data

■ Standard engine data

Engine manufacturer	Rehiko
Motor type	KDI 2504 TCR
Cylinder	4
Drive output	48 kW
Drive output	65 PS
at max. rpm	2,200 U/min
Maximum torque	300 Nm
Cylinder capacity	2,482 cm ³
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF

■ Electrical system

Operating voltage	12 V
Battery	100 Ah
Alternator	120 A

■ Weights

Operating weight	5,280 - 5,760 kg
Thrust force (max.)	8,135 daN
Lift capacity (max.)	5,515 daN
Tipping load with bucket – machine straight, loading frame horizontal	3,350 - 3,770 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	2,830 - 3,200 kg
Tipping load with bucket - machine straight, loading frame in lowest position	4,970 - 5,570 kg
Tipping load with bucket - machine pivoted, loading frame in lowest position	4,230 - 4,760 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	2,830 - 3,170 kg
Tipping load with pallet fork – machine pivoted, loading frame horizontal	2,410 - 2,710 kg
Tipping load with pallet fork - machine straight, transport position	3,410 - 3,800 kg
Tipping load with pallet fork - machine pivoted, transport position	2,910 - 3,260 kg

■ Driver's cab

Driver's cab	Cab
--------------	-----

■ Filling levels

Tank capacity for fuel	80 l
Tank capacity for hydraulic oil	32 l

■ Drive system

Type of drive	ecDrive (Electronic Controlled Drive)
drive unit	hydrostatic via transfer gearbox and universal joint shaft
Speed levels	2
Axle	PA 1422
Travel speed Standard	0-20 km/h
Travel speed Option 1	0-30 km/h
Operating brake	Drum brake (option: multi-disc brakes)
Parking brake	Drum brake (option: multi-disc brakes)
Differential lock	100 % front axle + rear axle

■ Hydraulic system

Drive hydraulics working pressure (max.)	500 bar
Work hydraulics discharge volume (max.)	74 (91) l/min
Work hydraulics working pressure (max.)	235 bar

■ Kinematics

Kinematics type	Z
Lifting cylinder	1
Tipping cylinder	1
Quick change system	hydraulic

■ Steering

Steering type	hydraulically activated articulated pendulum steering
Steering cylinder	1
Oscillating angle	± 10 degree

■ Noise characteristic values


Average sound power level LwA (cabin)	99.6 dB(A)
---------------------------------------	------------

Guaranteed sound power level LwA (cabin)	101 dB(A)
Specified sound pressure level LpA (cabin)	73 dB(A)

■ Other information

DPF = diesel particulate filter
DOC = diesel oxidation catalyst
SCR = selective catalytic reduction
Tipping load calculation pursuant to ISO 14397

Dimensions

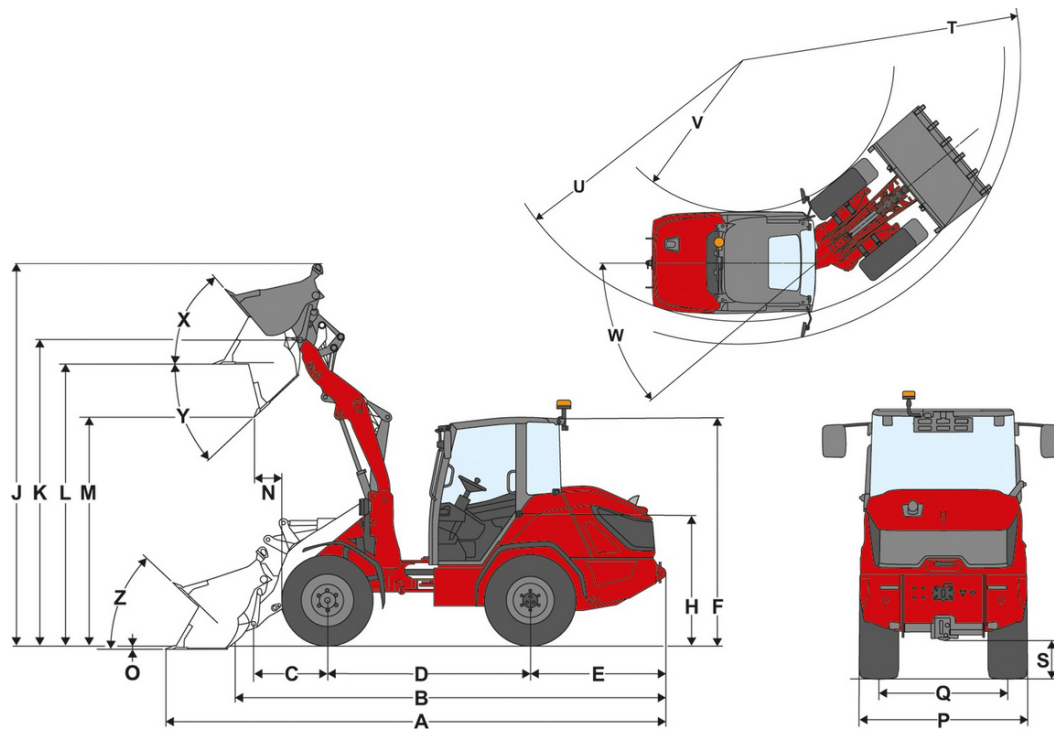

	Standard components	365 / 70 R18 BKT MP513 ET30
A	Total length	5,590 mm
B	Total length without bucket	4,880 mm
C	Bucket pivot point (to center of axle)	1,120 mm
D	Wheel base	2,150 mm
E	Rear overhang	1,435 mm
F	Height with cab	2,485 mm
H	Seat height	1,460 mm
J	Total working height	4,215 mm
K	Bucket pivot point (max. lift height)	3,395 mm
L	Load-over height	3,140 mm
M	Dumping height	2,590 mm
N	Reach (at M)	820 mm
O	Digging depth	145 mm
P	Total width	1,720 mm
Q	Track width	1,360 mm
S	Ground clearance	335 mm
T	Maximum external radius	4,385 mm
U	Radius on the outer edge	3,935 mm
V	Inner radius	2,125 mm
W	Articulation angle	40 °
X	Rollback angle at max. lift height	65 °
Y	Dumping angle	45 °
Z	Rollback angle on ground	45 °

Standard components

Engine

- Rehlko 2504 TCR, {48 kW / 65,3 PS}{48 kW / 64.4 HP}, (DOC/DPF), EU: Stage V

Steering system

- Hydraulic articulated pendulum steering
- Steering cylinder: 1

Operator's cab

- 1-Door comfort cabin with heater and fan, ROPS / FOPS-tested
- Generous provision of space
- Mirror on the left and right
- Ergonomic, generous access
- Adjustable steering wheel (incline and height)

Operator's seat

- Mechanically sprung fabric seat with seatbelt, weight, back and horizontal adjustment

Lighting

- Lighting according to StVZO
- LED Basic worklights (1000 lm) on the roof, 2 at the front, 1 at the rear

Drive system & Axles

- Axle: PA1422 planetary axle
- Drive: Hydrostatic all-wheel drive, electronically controlled, ecDrive (Electronic Controlled Drive)
- Driving modes: Auto mode; ECO mode (reduction of engine speed when the set speed is reached)
- Lock: 100% differential lock, electrically-hydraulically engageable on front and rear axles
- Speed: {20 km/h (optional 30 km/h)}{12.4 mph (optional 18.6 mph)}
- Drive stages: 2 | {10 km/h / 20 km/h}{6.2 mph / 12.4 mph}
- Service brake: Drum brake on front axle acting on rear axle via drive shaft
- Parking brake: Drum brake - operated by handbrake lever on front axle, acting on rear axle via drive shaft

Tires

- 365/70 R 18 BKT Multimax MP513 ET30, profile AS, width {1720 mm}{67.72 in}, height {2485 mm}{97.84 in}

Loading system

- Load arm LS960
- Hydraulic quickhitch facility (Z-HV)
- Kinematics: Z
- Lifting cylinder: 2
- Tipping cylinder: 1
- Floating position for lifting cylinder:

Hydraulics

- Electrically controlled joystick with direction switch and integrated button for differential lock
- 3. Front control circuit electrically proportional via joystick, including double detent
- Working hydraulics {74 l/min (33,6 ccm)}{19.6 gpm (2.1 in³)}
- Hydraulic oil cooler

EquipCare (telematics)

- EquipCare 36 months

Options

Operator's cab

- Two-piece cabin door
- Rear-view mirror, wide-angle, cabin
- Air-conditioning system
- Radio DAB+-ready (aerial, speaker)
- Radio DAB+ complete
- 1 plug receptacle: 2xUSB
- Sun shade

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

- Storage compartment (left of the operator's seat)
- Internal panoramic mirror

Operator's seat

- Vinyl seat
- Artificial leather seat; air-sprung; MSG95
- Fabric seat; air-sprung; high backrest; MSG95
- Fabric seat; air-sprung; heated seat; MSG95
- Fabric seat; air-sprung; heated seat; high backrest; MSG95
- Fabric seat; air-sprung; MSG95
- Fabric seat; high backrest; MSG85

Lighting

- LED lighting according to StVZO
- LED Performance worklights (2000 lm) on the roof, 2 at the front, 2 at the rear
- Rotating beacon LED (yellow), (The national regulations must be observed.)

Approval & Road traffic

- Individual operating permit < {25 km/h}{15.5 mph}
- Individual operating permit > {25 km/h}{15.5 mph}
- Front and rear license plate bracket
- Warning triangle (the national requirements must be observed.)

Drive system & Axles

- Manual throttle
- Pre-heating: Coolant, hydraulic oil; 230 V, plug receptacle type E/F
- Pre-heating: Coolant, hydraulic oil; 230 V, plug receptacle type J
- Pre-heating: Coolant, hydraulic oil; 230 V, plug receptacle type G
- Driving mode Auto / Eco / Attachments
- Driving mode Auto / Eco / M-Drive
- Speed limiter proportional (slow speed device)
- {20 km/h}{12.4 mph} speed increase
- {30 km/h}{18.6 mph} speed increase
- Electro-hydraulic multi-disc brakes with spring suspension in the front axle acting on rear axle via universal joint shaft, incl. hill-hold function

Tires

- 405/70 R 20 BKT Multimax MP 513 ET30, AS tread, width {1770 mm}{69.69 in}, height {2535 mm}{99.8 in}
- 550/45 R 22.5 Alliance 331 ET-50, AS tread, width {2070 mm}{81.5 in}, height {2536 mm}{99.84 in}
- 400 / 70 R 18 Alliance 585 ETO, EM profile, width {1824 mm}{71.81 in}, height {2509 mm}{98.78 in}
- 445 / 70 R 19.5 Alliance 624 ETO, EM tread, width {1865 mm}{73.45 in}, height {2553 mm}{100.51 in}
- 440 / 50 R 17 BKT Trac Super ETO, turf tread, width {1861 mm}{73.27 in}, height {2437 mm}{95.95 in}

Loading system

Quickhitch plates:

- SkidSteer (hydraulic - SAEJ2513 SSL HV)
- Euro (hydraulic - ISO23206 EURO HV) (incl. two couplings SVK size 3)
- Euro (hydraulic - ISO23206 EURO HV) + SMS HV (incl. two couplings SVK size 3)
- Weidemann HV/WL - L (hydraulic) (4080 / 5080)

Other:

- Lowering brake valve (hose burst valves for lift and tipping cylinders)
- Load arm dampening
- Bucket status display

Bio-hydraulic oil

- Shell Panolin S4 HLP Synt46 (Biohydraulic oil)

Hydraulics in front

- Working hydraulics {91 l/min (41.7 ccm)}{24.0 gpm (2.6 in³)}
- Pressureless return at front (1 x flat face size 3, plug) incl. leak oil line (1 x flat face size 2, plug)
- Faster quick coupling, double - machine side + attachment side
- Pressure relief 3rd control circuit at front of telescopic arm

Hydraulics in rear

- Rear single-acting hydraulic connection via changeover valve (two SVK size 3 couplings)

Electrical connections in front

- Front plug receptacle, 13-pole (2x electric functions E1/ E2 and lighting); Operation: Via 2 buttons on the joystick; 1st pressing function, 2nd latching function
- The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

- Front socket 13-pole (2x electrical functions E1/ E2 and lighting);&# 160;Operation: Via 2 buttons on the joystick; 1st latching function, 2nd pressing function
- Front socket 13-pole (2x electrical functions E1/ E2 and lighting);&# 160;Operation: Via 2 buttons on the joystick; 1st pressing function, 2nd pressing function
- Front socket 13-pole (2x electrical functions E1/ E2 and lighting);&# 160;Operation: Via 2 buttons on the joystick; 1st latching function, 2nd latching function

Electrical connections in rear

- Rear socket 7-pole for lighting of rear attachments

Electrical system

Battery disconnect switch:

- Battery isolator switch driver's cab - relay isolating

Safety options

- Reversing warning device (acoustic)
- Rear view camera
- Seat belt monitoring
- Immobilizer ignition key (operation: Via coded ignition key)

Custom-made paint finish

- Special painting RAL single color - instead of Weidemann red
- Special painting RAL multicolored

Other

- Floor plate counterweight (200 kg){440.9 lb}
- Tool box incl. tool set
- Combination bag (warning triangle / first aid kit)
- Fully automatic central lubrication unit

Warranty extension

- Economy 24 months (2500 h)
- Economy 36 months (3000 h)
- Economy 48 months (3500 h)
- Economy 60 months (4000 h)
- Premium 24 months (3000 h)
- Premium 36 months (4000 h)
- Premium 48 months (5000 h)
- Premium 60 months (6000 h)

Trailer and recovery equipment

- Trailer hitch (38 mm){1.5 in}, automatic
- Maneuvering coupling (Not approved for trailer operation!)