



**WACKER
NEUSON**
all it takes!

ET08

Tracked Conventional Excavator

The little giant that can go anywhere

The ET08 leaves absolutely nothing to be desired in terms of strength. It stands out for its narrow width. This means it fits perfectly through interior doors, and its rubber tracks protect the floor. Special attention was paid to hydraulic performance. Attachments can be easily operated using the standard auxiliary hydraulic system. It is equipped with the renowned Yanmar engine, which delivers 11.6 kW of power—a truly powerful tool for a variety of tasks.

Highlights

- Hydraulic telescopic chassis with dozer blade extension
- Standard one-way auxiliary hydraulics
- Powerful drive with Stage IV engine
- Folding ROPS safety bar
- Compact dimensions

Technical Data

Hydraulic

Operating pressure hydraulics	170.0 bar
Flow rate	20.0 l/min
Flow rate max.	23.0 l/min
Tank capacity	14.0 l

Mechanical - Output Details

Travel speed	1.8 km/h
--------------	----------

Mechanical Details

Length	2,850.0 mm
Width	700.0 mm
Height	2,261.0 mm
Operating weight (min.-max.)	1,029.0 - 1,115.0 kg
Digging depth (max.)	1,763.0 mm

Engine

Cooling	Water-cooling
Engine type	Diesel engine

Cylinder	3.0
Cylinder capacity	993.0 cm ³
Tank capacity	10.0 l
Effective power	11.6 kW
Nominal Engine speed	2,500.0 1/min
Exhaust-gas limit	中国四 (China IV)
Starter battery Voltage	12.0 V
Battery capacity (nom. value)	30.0 Ah
Engine Manufacturer	Yanmar
Engine Designation	3TNV74F-SNWN1
Stroke	77.0 mm
Bore	74.0 mm


Chassis

Operating pressure	170.0 bar
--------------------	-----------

Shipping and Storage

Shipping weight	990.0 kg
-----------------	----------

Dimensions

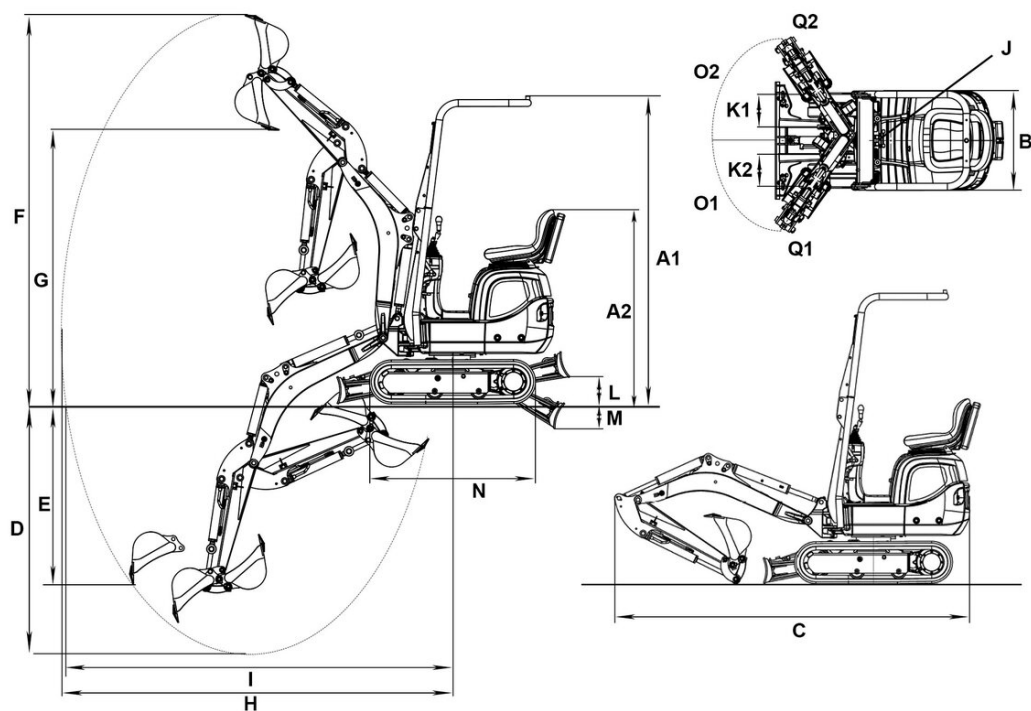

A1	Height ROPS	2,261 mm
A2	Height	1,427 mm
B	Width of upper carriage	730 mm
	Width travel gear retracted	700 mm
B	Width travel gear extended	860 mm
C	Transport length	2,828 mm
D	Digging depth max.	1,763 mm
E	Piercing depth max.	1,320 mm
F	Piercing height max.	2,863 mm
G	Dumping height max.	2,012 mm
H	Digging radius max.	3,090 mm
I	Max. reach at ground level	3,028 mm
J	Tail swing radius	747 mm
K1	Boom offset max. (to center of bucket left side)	245 mm
K2	Boom offset max. (to center of bucket right side)	283 mm
M	Digging depth max. (dozer blade below surface)	178 mm
N	Length travel drive	1,220 mm
O1	Boom swing radius left	55 °
O2	Boom swing radius right	56 °