





WL20

Wheel Loader

Agile in the most confined spaces

The Wacker Neuson WL20 wheel loader can be used with great versatility – even in the narrowest passageway. And not only that: even in confined spaces, the wheel loader delivers first-class work results, impressive down the line. Beside high levels of working comfort and outstanding safety standards, the WL20 wheel loader offers exceptional maneuverability, off-road capability and speed, saving space in application.

Highlights

- Tiltable cabin and optimal service access
- The wheel loader as an attachment carrier
- EPS folding overhead guard (Easy Protection System)
- Maximum traction thanks to articulated pendulum joint
- Selectable operator's cab

Technical Data

Standard	engine	data
Stallualu	CHAINE	uata

Engine manufacturer	Perkins			
Motor type	403 J-11			
Cylinder	3			
Drive output	18.4 kW			
Drive output	25 PS			
at max. rpm	2,800 U/min			
Cylinder capacity	1,131 cm ³			
Type of coolant	Water			
Exhaust standard level	V			
Exhaust aftertreatment	-			
Electrical system				
Operating voltage	12 V			
Battery	77 Ah			
Alternator	40 A			
■ Weights				
Bucket capacity (standard bucket)	0.19 m³			
Operating weight	2,000 - 2,150 kg			
Tipping load with bucket – machine straight, loading frame horizontal	1,215 - 1,437 kg			
Tipping load with bucket – machine pivoted, loading frame horizontal	977 - 1,206 kg			
Tipping load with pallet fork – machine straight, loading frame				

Tipping load with pallet fork –
machine pivoted, loading frame
horizontal

Driver's cab

FSD (EPS, cabin)

Filling levels

Tank capacity for fuel 20 I

Tank capacity for hydraulic oil 20 I

Drive system

Type of drive Hydrostatic drive unit universal joint shaft Speed levels T80 (T94) Axle Travel speed Standard 0-20 km/h Hydrostatic drive system acting on all Operating brake 4 wheels (wear-free) Service and parking brake in the drive Parking brake Differential lock 100% VA + HA (option)

Hydraulic system

Drive hydraulics working pressure (max.)

Work hydraulics discharge volume (max.)

330 (450) bar

30,8 l/min

Kinematics

Kinematics type

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

horizontal

Lifting cylinder	2	
Tipping cylinder	1	
Quick change system	hydraulic	
Steering		
Steering type	hydraulically activated articulated pendulum steering	
Steering cylinder	1	
Oscillating angle	± 12 degree	

Noise characteristic values

Average sound power level LwA (operator's canopy)	99 dB(A)
Guaranteed sound power level LwA (operator's canopy)	101 dB(A)
Specified sound pressure level LpA (operator's canopy)	84 dB(A)


Other information

FSD = Fahrerschutzdach

EPS = Easy Protection System (klappbares Fahrerschutzdach) DPF = Dieselpartikelfilter

DOC = Dieseloxidationskatalysator Kipplastberechnung nachISO 14397

Dimensions

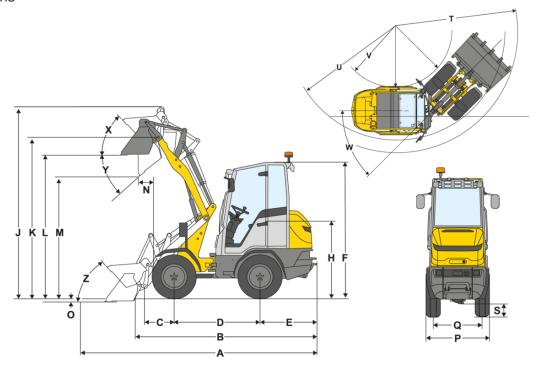

Α	Total length	3,721 mm
В	Total length without bucket	3,063 mm
С	Bucket pivot point (to center of axle)	508 mm
D	Wheel base	1,468 mm
Е	Rear overhang	975 mm
F	Height with operator's canopy (fixed)	2,189 mm
	Height with fold-down operator's canopy (EPS)	2,293 mm
F	Height with fold-down operator's canopy (EPS), folded down	1,880 mm
	Height with lowerable operator's canopy (EPS Plus)	2,195 mm
F	Height with lowerable operator's canopy (EPS Plus), lowered	1,901 mm
	Height with cab	2,302 mm
Н	Seat height	1,225 mm
J	Total working height	3,274 mm
K	Bucket pivot point (max. lift height)	2,693 mm
L	Load-over height	2,424 mm
M	Dumping height	2,011 mm
N	Reach (at M)	350 mm
0	Digging depth	94 mm
Р	Total width	1,076 mm
Q	Track width	810 mm
Т	Maximum radius	2,681 mm
U	Radius on the outer edge	2,356 mm
V	Inner radius	1,219 mm
W	Articulation angle	45 °
X	Rollback angle at max. lift height	50 °
Υ	Dumping angle	38 °
Z	Rollback angle on ground	48 °