





DT12

Track Dumper

Works efficiently everywhere

The hydraulically activated and pilot-operated machine provides for overall simple operation, and the hydrostatic drive system make it a comfortable and durable machine for a variety of job site applications . Rubber tracks provide excellent weight distribution and low ground pressure even with a high payload. The extensive selection of skips, a low center of gravity and the suspension-mounted rollers make it an ideal material handler on all types of terrain.

Highlights

- Hydrostatic drive
- Small dimensions


Technical Data

Hydraulic		
Hydraulicpump	Variable displacement and gear pump	
Flow rate max.	76.0 l/min	
Mechanical - Output Details		
Travel speed	4.0 km/h	
Mechanical Details		
Length	1,823.0 mm	
Width	790.0 mm	
Height	1,303.0 mm	
Weight	650.00 kg	
Payload max.	1,200.0 kg	
Skip	Front tip skip	
Skip capacity levelled	393.0	
Skip capacity heaped	440.0	
Operating weight (minmax.)	685.0 - 940.0 kg	
Engine		
Engine type	Diesel engine	

Cylinder	3.0	
Cylinder capacity	719.0 cm3	
Inclined position max.	20.0 °	
Effective power	12.0 KW	
Nominal Engine speed	2,700.0 1/min	
Exhaust-gas limit	EU Stage V	
Engine Manufacturer	Kubota	
Engine Designation	D-722	
Stroke	68.0 mm	
Bore	67.0 mm	
Environment Data		
Sound level LpA	88.0 dB(A)	
Sound level LpA (Standard)	ISO 6396	
Sound power LWA, guaranteed	101.0 dB(A)	
Sound power LWA (Standard)	ISO 6395	
Shipping and Storage		
Shipping weight	610.0 kg	

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Dimensions

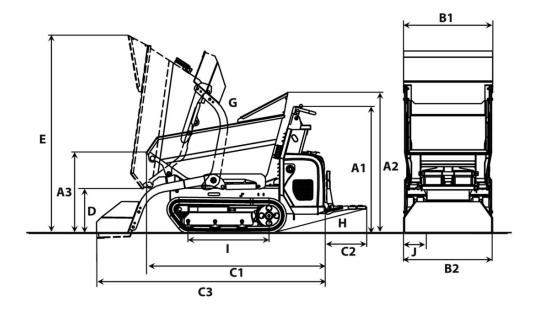

A1	Height above operator's stand	1,280 mm
A3	Height front edge of skip	812 mm
B1	Width of upper carriage	700 mm
	Width of skip	830 mm
B2	Width of undercarriage	790 mm
C1	Total length without footboard	1,823 mm
C2	Length footboard	393 mm
C3	Length with self-loading equipment, without footboard	2,277 mm
D	Dumping height max.	460 mm
Е	Skip height tilted	1,950 mm
G	Dumping angle	70 °
Н	Rollback angle footboard	14 °
1	Length chain stand	875 mm