



## DT12

### Track Dumper

Works efficiently everywhere

The hydraulically activated and pilot-operated machine provides for overall simple operation, and the hydrostatic drive system make it a comfortable and durable machine for a variety of job site applications. Rubber tracks provide excellent weight distribution and low ground pressure even with a high payload. The extensive selection of skips, a low center of gravity and the suspension-mounted rollers make it an ideal material handler on all types of terrain.

## Highlights

- Hydrostatic drive
- Small dimensions

## Technical Data

### ■ Hydraulic

Hydraulic pump	Variable displacement and gear pump
Flow rate max.	76.0 l/min

### ■ Mechanical - Output Details

Travel speed	4.0 km/h
--------------	----------

### ■ Mechanical Details

Length	1,823.0 mm
Width	790.0 mm
Height	1,303.0 mm
Weight	650.00 kg
Payload max.	1,200.0 kg
Skip	Front tip skip
Skip capacity levelled	393.0 l
Skip capacity heaped	440.0 l
Operating weight (min.-max.)	685.0 - 940.0 kg

### ■ Engine

Engine type	Diesel engine
-------------	---------------

Cylinder	3.0
Cylinder capacity	719.0 cm <sup>3</sup>
Inclined position max.	20.0 °
Effective power	12.0 KW
Nominal Engine speed	2,700.0 1/min
Exhaust-gas limit	EU Stage V
Engine Manufacturer	Kubota
Engine Designation	D-722
Stroke	68.0 mm
Bore	67.0 mm


### ■ Environment Data

Sound level LpA	88.0 dB(A)
Sound level LpA (Standard)	ISO 6396
Sound power LWA, guaranteed	101.0 dB(A)
Sound power LWA (Standard)	ISO 6395

### ■ Shipping and Storage

Shipping weight	610.0 kg
-----------------	----------

## Dimensions

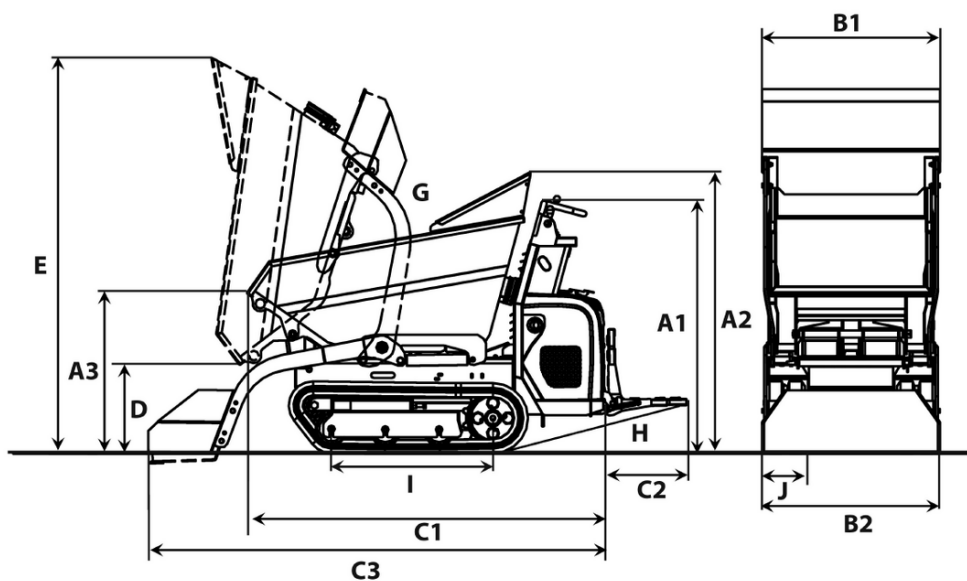

A1	Height above operator's stand	1,280 mm
A3	Height front edge of skip	812 mm
B1	Width of skip	830 mm
	Width of upper carriage	700 mm
B2	Width of undercarriage	790 mm
C1	Total length without footboard	1,823 mm
C2	Length footboard	393 mm
C3	Length with self-loading equipment, without footboard	2,277 mm
D	Dumping height max.	460 mm
E	Skip height tilted	1,950 mm
G	Dumping angle	70 °
H	Rollback angle footboard	14 °
I	Length chain stand	875 mm