



# 4060

## Wheel loader

### Technical Data

#### ■ Standard engine data

Engine manufacturer	Rehiko
Motor type	KDI 2504 TCR
Cylinder	4
Drive output	55.4 kW
Drive output	75 PS
at max. rpm	2,300 U/min
Maximum torque	315 Nm
Cylinder capacity	2,482 cm <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF

#### ■ Electrical system

Operating voltage	12 V
Battery	100 Ah
Alternator	120 A

#### ■ Weights

Operating weight	5,760 - 6,080 kg
Thrust force (max.)	5,950 daN
Lift capacity (max.)	4,190 daN
Tipping load with bucket – machine straight, loading frame horizontal	3,220 - 3,450 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	2,760 - 2,960 kg
Tipping load with bucket - machine straight, loading frame in lowest position	4,230 - 4,530 kg
Tipping load with bucket - machine pivoted, loading frame in lowest position	3,640 - 3,900 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	2,870 - 3,070 kg
Tipping load with pallet fork – machine pivoted, loading frame horizontal	2,480 - 2,650 kg
Tipping load with pallet fork - machine straight, transport position	3,340 - 3,560 kg
Tipping load with pallet fork - machine pivoted, transport position	2,890 - 3,090 kg

#### ■ Driver's cab

Driver's cab	Cab
--------------	-----

#### ■ Filling levels

Tank capacity for fuel	80 l
Tank capacity for hydraulic oil	32 l

#### ■ Drive system

Type of drive	ecDrive (Electronic Controlled Drive)
drive unit	hydrostatic via transfer gearbox and universal joint shaft
Speed levels	2
Axle	PA 1422
Travel speed Standard	0-20 km/h
Travel speed Option 1	0-30 km/h
Operating brake	Disc brakes (option: multi-disc brakes)
Parking brake	Disc brakes (option: multi-disc brakes)
Differential lock	100 % front axle + rear axle

#### ■ Hydraulic system

Drive hydraulics working pressure (max.)	500 bar
Work hydraulics discharge volume (max.)	77 (95) l/min
Work hydraulics working pressure (max.)	235 bar

#### ■ Kinematics

Kinematics type	Z
Lifting cylinder	1
Tipping cylinder	1
Quick change system	hydraulic

#### ■ Steering

Steering type	hydraulically activated articulated pendulum steering
Steering cylinder	1
Oscillating angle	± 10 degree

#### ■ Noise characteristic values


Average sound power level LwA (cabin)	99.8 dB(A)
---------------------------------------	------------

Guaranteed sound power level LwA (cabin)	101 dB(A)
Specified sound pressure level LpA (cabin)	71 dB(A)

#### ■ Other information

DPF = diesel particulate filter  
DOC = diesel oxidation catalyst  
SCR = selective catalytic reduction  
Tipping load calculation pursuant to ISO 14397

## Dimensions

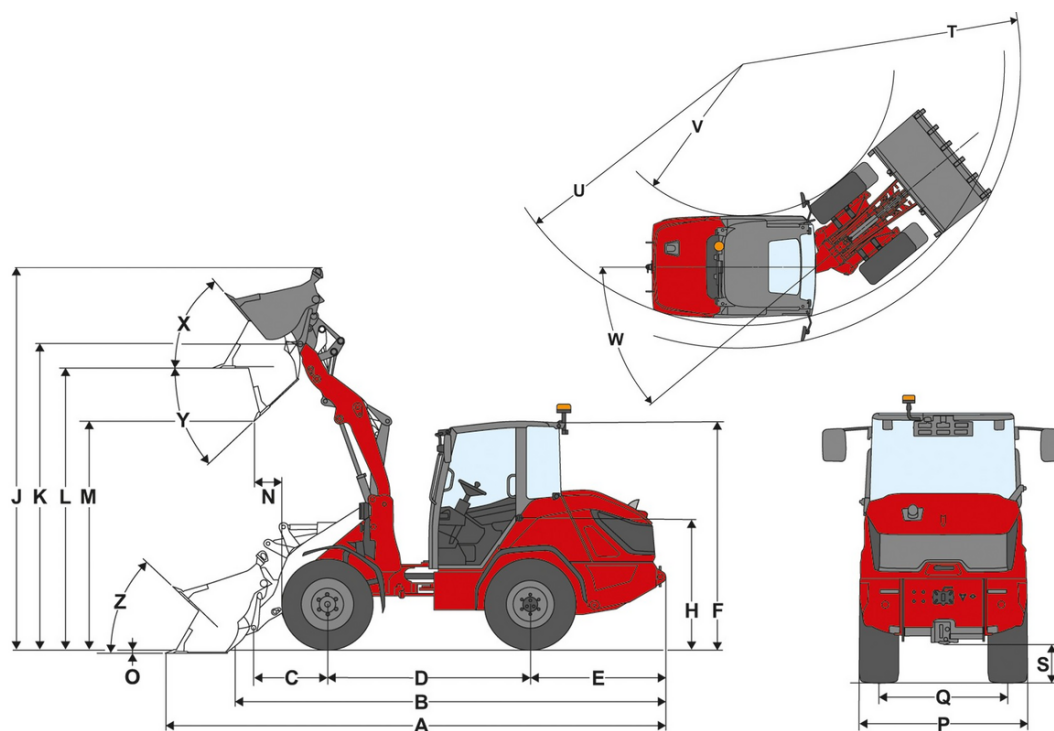

	Standard components	405 / 70 R20 BKT 513 ET30
<b>A</b>	Total length	6,115 mm
<b>B</b>	Total length without bucket	5,275 mm
<b>C</b>	Bucket pivot point (to center of axle)	1,530 mm
<b>D</b>	Wheel base	2,150 mm
<b>E</b>	Rear overhang	1,435 mm
<b>F</b>	Height with cab	2,535 mm
<b>H</b>	Seat height	1,510 mm
<b>J</b>	Total working height	4,580 mm
<b>K</b>	Bucket pivot point (max. lift height)	3,700 mm
<b>L</b>	Load-over height	3,450 mm
<b>M</b>	Dumping height	2,815 mm
<b>N</b>	Reach (at M)	1,065 mm
<b>O</b>	Digging depth	80 mm
<b>P</b>	Total width	1,770 mm
<b>Q</b>	Track width	1,360 mm
<b>S</b>	Ground clearance	390 mm
<b>T</b>	Maximum radius	4,645 mm
<b>U</b>	Radius on the outer edge	3,990 mm
<b>V</b>	Inner radius	2,100 mm
<b>W</b>	Articulation angle	40 °
<b>X</b>	Rollback angle at max. lift height	63 °
<b>Y</b>	Dumping angle	45 °
<b>Z</b>	Rollback angle on ground	47 °

## Standard components

### Engine

- Rehlko KDI 2504 TCR, {55.4 kW (75,3 PS)}{55.4 kW (74.3 HP)}, (DOC/DPF), EU: Stage V

### Steering system

- Hydraulic articulated pendulum steering
- Steering cylinder: 1

### Operator's cab

- 1-Door comfort cabin with heater and fan, ROPS / FOPS-tested
- Generous provision of space
- Mirror on the left and right
- Ergonomic, generous access
- Adjustable steering wheel (incline and height)

### Operator's seat

- Mechanically sprung fabric seat with seatbelt, weight, back and horizontal adjustment

### Lighting

- Lighting according to StVZO
- LED Basic worklights (1000 lm) on the roof, 2 at the front, 1 at the rear

### Drive system & Axles

- Axle: planetary axle PA1422
- Drive: Hydrostatic all-wheel drive, electronically controlled, ecDrive (Electronic Controlled Drive)
- operating modes: Auto Mode; ECO Mode (reduction of engine speed when set speed is reached)
- Lock: different lock 100 %, electrically-hydraulically adjustable on the front and rear axle
- Speed {20 km/h (optional 30 km/h)}{12.4 mph (optional 18.6 mph)}
- Speed levels: 2 | {10 km/h / 20 km/h}{6.2 mph / 12.4 mph}
- Operating brake: Disc brake on the front axle acting on the rear axle via a drive shaft
- Parking brake: Disc brake; operated by handbrake lever on front axle, acting on rear axle via drive shaft

### Tires

- 405 / 70 R 20 BKT MP513 ET30, Width {1770 mm}{69.69 in}, Height {2,535 mm}{99.8 in}

### Loading system

- Load arm LS961
- Hydraulic quickhitch facility (Z-HV)
- Kinematics: Z
- Lifting cylinder: 1
- Tipping cylinder: 1
- Floating position for lift cylinder

### Hydraulics

- Electric pilot-controlled joystick with travel direction control and integrated touch button for differential lock
- 3rd control circuit front, electrical, proportional via joystick incl double rest
- Hydraulic oil cooler

### EquipCare (telematics)

- EquipCare 36 months

## Options

### Operator's cab

- Two-piece cabin door
- Rear-view mirror, wide-angle, cabin
- Air-conditioning system
- Radio DAB+-ready (aerial, speaker)
- Radio DAB+ complete
- 1 plug receptacle: 2xUSB
- Sun shade
- Storage compartment (left of the operator's seat)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

- Internal panoramic mirror

#### Operator's seat

- Vinyl seat
- Artificial leather seat; air-sprung; MSG95
- Fabric seat; air-sprung; high backrest; MSG95
- Fabric seat; air-sprung; heated seat; MSG95
- Fabric seat; air-sprung; heated seat; high backrest; MSG95
- Fabric seat; air-sprung; MSG95
- Fabric seat; high backrest; MSG85

#### Lighting

- LED lighting according to StVZO
- LED Performance worklights (2000 lm) on the roof, 2 at the front, 2 at the rear
- Rotating beacon LED (yellow), (The national regulations must be observed.)

#### Approval & Road traffic

- Individual operating permit < {25 km/h}{15.5 mph}
- Individual operating permit > {25 km/h}{15.5 mph}
- Front and rear license plate bracket
- Warning triangle (the national requirements must be observed.)

#### Drive system & Axles

- Manual throttle
- Pre-heating: Coolant, hydraulic oil; 230 V, plug receptacle type E/F
- Pre-heating: Coolant, hydraulic oil; 230 V, plug receptacle type J
- Pre-heating: Coolant, hydraulic oil; 230 V, plug receptacle type G
- Driving mode Auto / Eco / Attachments
- Driving mode Auto / Eco / M-Drive
- Speed limiter proportional (slow speed device)
- {20 km/h}{12.4 mph} speed increase
- {30 km/h}{18.6 mph} speed increase
- Electro-hydraulic multi-disc brakes with spring suspension in the front axle acting on rear axle via universal joint shaft, incl. hill-hold function

#### Tires

- 400/70 R 20 Alliance 585 ET0, width {1827 mm}{72.93 in}, height {2531 mm}{99.65 in}
- 445/70 R 19.5 Alliance 624 ET0, width {1868 mm}{73.54 in}, height {2550 mm}{100.39 in}
- 550 / 45 R 22.5 Alliance 331 ET-50, width {2073 mm}{81.61 in}, height {2532 mm}{99.69 in}

#### Loading system

Quickhitch plates:

- SkidSteer (hydraulic - SAEJ2513 SSL HV)
- Euro (hydraulic - ISO23206 EURO HV) (incl. two couplings SVK size 3)
- Weidemann HV/WL - L (hydraulic) (4080 / 5080)

Other:

- Lowering brake valve (hose burst valves for lift and tipping cylinders)
- Load arm dampening
- Bucket status display

#### Bio-hydraulic oil

- Shell Panolin HLP Synt46 (Biohydraulic oil)

#### Hydraulics in front

- Work hydraulics {77 l/min (33,6 ccm)}{20.3 gpm (2.1 in³)}
- Work hydraulics {95 l/min (41,7 ccm)}{25.1 gpm (2.5 in³)}
- Pressureless return line in front (1 x Flatface size 3, plug) incl. leakage oil line (1 x Flatface size 2, plug)
- Quick coupling faster 2-fold - machine side + attachment side
- Pressure release of 3rd control circuit in front on telescopic arm

#### Hydraulics in rear

- Rear single-acting hydraulic connection via changeover valve (two SVK size 3 couplings)

#### Electrical connections in front

- Front plug receptacle, 13-pole (2x electric functions E1/ E2 and lighting); Operation: Via 2 buttons on the joystick; 1st pressing function, 2nd latching function
- Front socket 13-pole (2x electrical functions E1/ E2 and lighting);&# 160;Operation: Via 2 buttons on the joystick; 1st latching function, 2nd pressing function
- Front socket 13-pole (2x electrical functions E1/ E2 and lighting);&# 160;Operation: Via 2 buttons on the joystick; 1st pressing function, 2nd pressing function
- Front socket 13-pole (2x electrical functions E1/ E2 and lighting);&# 160;Operation: Via 2 buttons on the joystick; 1st latching function, 2nd latching function

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

#### **Electrical connections in rear**

- Rear socket 7-pole for lighting of rear attachments

#### **Electrical system**

Battery disconnect switch:

- Battery isolator switch driver's cab - relay isolating

#### **Safety options**

- Reversing warning device (acoustic)
- Rear view camera
- Seat belt monitoring
- Immobilizer ignition key (operation: Via coded ignition key)

#### **Custom-made paint finish**

- Special painting RAL single color - instead of Weidemann red
- Special painting RAL multicolored

#### **Other**

- Floor plate counterweight ({100 kg}{220.5 lb})({100 kg}{220.5 lb})
- Tool box incl. tool set
- Combination bag (warning triangle / first aid kit)
- Fully automatic central lubrication unit

Warranty extension

- Economy 24 months (2500 h)
- Economy 36 months (3000 h)
- Economy 48 months (3500 h)
- Economy 60 months (4000 h)
- Premium 24 months (3000 h)
- Premium 36 months (4000 h)
- Premium 48 months (5000 h)
- Premium 60 months (6000 h)

#### **Trailer and recovery equipment**

- Trailer hitch {38 mm}{1.5 in}, automatic
- Shunting coupling (not approved for trailer operation!)