



## 1140 Basic Line

### Hoftrac

#### Technical Data

##### ■ Standard engine data

Engine manufacturer	Perkins
Motor type	403 J-11
Cylinder	3
Drive output	18.4 kW
Drive output	25 PS
at max. rpm	2,800 U/min
Cylinder capacity	1,131 cm³
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	-

##### ■ Electrical system

Operating voltage	12 V
Battery	77 Ah
Alternator	40 A

##### ■ Weights

Operating weight	1,560 - 1,740 kg
Thrust force (max.)	1,462 daN
Lift capacity (max.)	1,653 daN
Tipping load with bucket – machine straight, loading frame horizontal	730 - 900 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	550 - 680 kg
Tipping load with bucket - machine straight, loading frame in lowest position	1,330 - 1,600 kg
Tipping load with bucket - machine pivoted, loading frame in lowest position	1,010 - 1,220 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	540 - 670 kg
Tipping load with pallet fork – machine pivoted, loading frame horizontal	400 - 500 kg
Tipping load with pallet fork - machine straight, transport position	780 - 950 kg
Tipping load with pallet fork - machine pivoted, transport position	580 - 710 kg

##### ■ Driver's cab

Driver's cab	FSD (eps)
--------------	-----------

##### ■ Filling levels

Tank capacity for fuel	21 l
Tank capacity for hydraulic oil	18 l

##### ■ Drive system

Type of drive	Hydraulic (hydrostatic)
drive unit	oil engine
Speed levels	1
Axle	K75
Travel speed Standard	0-10 km/h
Travel speed Option 1	0-13 km/h
Operating brake	Transmission drum brake
Parking brake	Service and parking brake in the drive train

##### ■ Hydraulic system

Drive hydraulics working pressure (max.)	215 (305) bar
Work hydraulics discharge volume (max.)	30,8 l/min
Work hydraulics working pressure (max.)	205 bar

##### ■ Kinematics

Kinematics type	P
Lifting cylinder	2
Tipping cylinder	1
Quick change system	Mechanical (hydraulically activated)

##### ■ Steering

Steering type	hydraulically activated articulated pendulum steering
Steering cylinder	1
Oscillating angle	± 12 degree

##### ■ Noise characteristic values

Average sound power level LwA (operator's canopy)	99.6 dB(A)
Guaranteed sound power level LwA (operator's canopy)	101 dB(A)


Specified sound pressure level LpA 86 dB(A)  
(operator's canopy)

DPF = diesel particulate filter  
DOC = diesel oxidation catalyst  
Tipping load calculation pursuant to ISO 14397

■ **Other information**

FSD = operator's canopy  
eps = Easy Protection System (fold-down operator's canopy)

## Dimensions

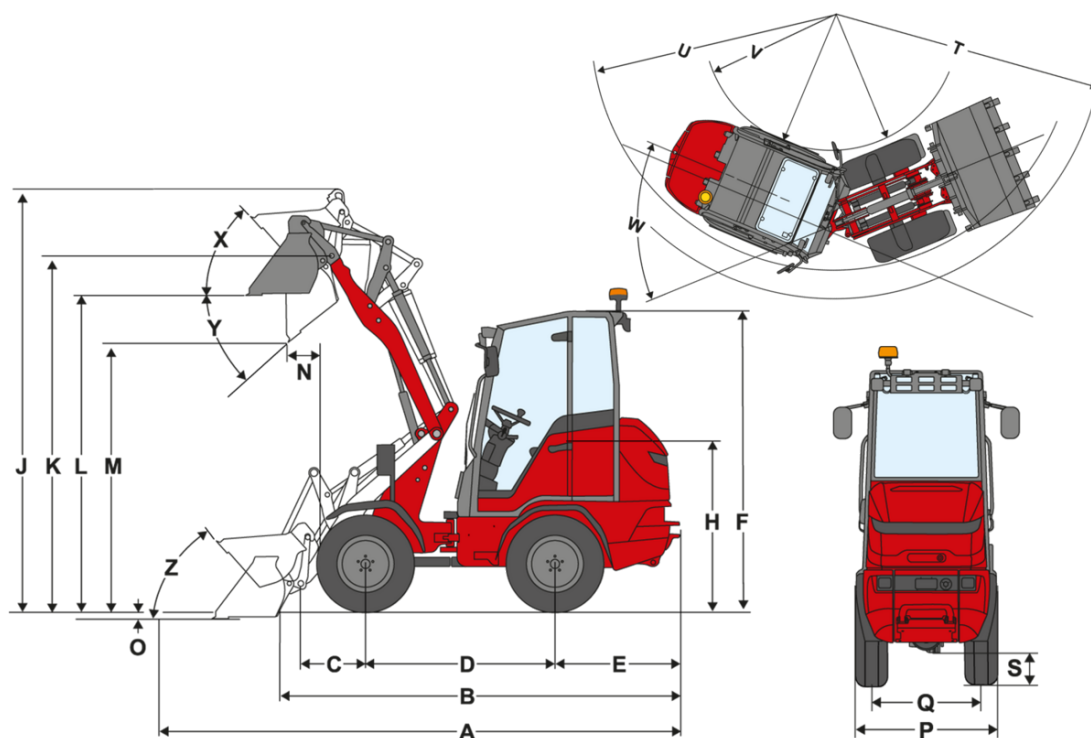

### P-kinematics (standard)

	Standard components	7.00 - 12 AS ET40
<b>A</b>	Total length	3,706 mm
<b>B</b>	Total length without bucket	2,733 mm
<b>C</b>	Bucket pivot point (to center of axle)	496 mm
<b>D</b>	Wheel base	1,345 mm
<b>E</b>	Rear overhang	779 mm
<b>F</b>	Height with operator's canopy fixed	2,124 mm
	Height with fold-down operator's canopy (eps)	2,227 mm
	Height with fold-down operator's canopy, folded down (eps)	1,937 mm
	Height with cab	
<b>H</b>	Seat height	1,142 mm
<b>J</b>	Total working height	3,415 mm
<b>K</b>	Bucket pivot point (max. lift height)	2,734 mm
<b>L</b>	Load-over height	2,405 mm
<b>M</b>	Dumping height	1,807 mm
<b>N</b>	Reach (at M)	550
<b>O</b>	Digging depth	113 mm
<b>P</b>	Total width	850 mm
<b>Q</b>	Track width	660 mm
<b>S</b>	Ground clearance	
<b>T</b>	Maximum radius	2,140 mm
<b>U</b>	Radius on the outer edge	1,570 mm
<b>V</b>	Inner radius	600 mm
<b>W</b>	Articulation angle	55 °
<b>X</b>	Rollback angle at max. lift height	50 °
<b>Y</b>	Dumping angle	39 °
<b>Z</b>	Rollback angle on ground	48 °

## Standard components

### Engine

- Perkins 403 J-11, {18,4 kW / 25 PS}{18.4 kW / 24.7 HP}, stage V

### Tires

- 7.00 - 12 BKT AS 504 ET40, Profil AS, Breite {850 mm}{33.47 in}(incl. turning rims)

### Steering system

- Hydraulic articulated pendulum steering, pendulum angle  $\pm 12^\circ$
- Steering cylinder 1

### Drive system & Axles

- Axle: K75
- Drive: Hydraulic four-wheel drive via oil engines, Driving direction selectable via foot pedal
- {10 km/h}{6.2 mph}
- Speed ranges: 2 (Hydraulic overdrive)
- Service brake: Transmission drum brake acting on rear axle
- Parking brake Central service and parking brake in drive train acting on all 4 wheel

### Hydraulics

- Mechanically pilot-controlled lever
- 3rd control circuit at the front via lever

### Operator's cab

- Overhead guard with restraint system ROPS / FOPS tested
- Operating hours meter
- Fuel gauge

### Operator's seat

- Seat with seat belt, full suspension, weight, back and longitudinal adjustment

### Loading system

- Loader unit LS945
- quick-change device (Weidemann) mechanical
- Kinematics: P
- Lifting cylinder: 2
- Tilting cylinder: 1
- Floating position for lifting and tilting cylinders

## Options

### Operator's cab

- Folding overhead guard eps ROPS / FOPS tested
- Steering column adjustable (inclination)
- Rear view mirror (left and right)

### Lighting

- Lighting according to StVZO
- Work lights LED Basic (1000 lm) on roof, 2 in front, 1 in the back
- Work light LED Basic (1000 lm) 1 additional at the load system
- Rotating beacon (yellow), (National regulations must be observed!)
- Rotating beacon (yellow) with magnetic base, (National regulations must be observed!)

### Drive system & Axles

- Axle K75, hydrostatic all-wheel drive, 13 km/h (automatic driving via oil motors on the axles)

### Tires

- 26.0x12.00-12 BKT TR 315 ET0, tread AS, width {1080 mm}{42.52 in}
- Dual tires 7.00-12 BKT AS 504 front, tread AS, width {1390 mm}{54.72 in}
- 27x 8.50-15 BKT SkidPower HD ET30, tread EM, width {940 mm}{37.01 in}
- 27x10.50-15 BKT SkidPower HD ET-5, tread EM, width {1000 mm}{39.37 in}
- 26.0x12.00-12 BKT LG 306 ET0, tread RP, width {1080 mm}{42.52 in}

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

- Track diffusion {(+2x15 mm)}{(+2x0.59 in)}

#### **Quick change plates**

- Weidemann hydraulic
- Weidemann HV/HT - C - ECS
- Euro (hydraulic - ISO23206 EURO HV)

#### **Hydraulics in front**

- 3rd Control circuit comfort, incl. single detent on lever for 3rd Control circuit (operation: Via button on joystick + tilt in and tilt out)
- Hydraulic oil cooler additional
- Single detent on the lever for the 3rd control circuit

#### **Additional weight**

- Ballast weight rear mounted {(96 kg)}{(211.6 lb)}

#### **EquipCare (telematics)**

- EquipCare 36 months (incl. App & Manager)

#### **Other**

Warranty extension

- Economy 24 months (2500 h)
- Economy 36 months (3000 h)
- Economy 48 months (3500 h)
- Economy 60 months (4000 h)
- Premium 24 months (3000 h)
- Premium 36 months (4000 h)
- Premium 48 months (5000 h)
- Premium 60 months (6000 h)