





DT15

Track Dumper

Maximum application power

The DT15 is the ideal transporter on the construction site for extensive work. The large skip selection combined with the comfortable and intuitive hydrostatic drive system as well as the high payload make it the perfect versatile material handler. The single-piece engine hood and the optimal arrangement of the service points also make daily maintenance much easier, saving time and effort. The low center of gravity makes it a trustworthy partner in material transport, even with a high load.

Highlights

- Hydrostatic drive
- Interchangeable skip versions
- Operator's seat
- Entry and exit on both sides

Technical Data

,
Hydraulicpump
Flow rate max.

Hvdraulic

Variable displacement and gear pump

95.0 I/min

Mechanical - Output Details			
Travel speed	7.5 km/h		
Mechanical Details			
Length	2,674.0 mm		
Width	1,102.0 mm		
Height	2,372.0 mm		
Weight	1,040.00 kg		
Payload max.	1,500.0 kg		
Skip	Front tip skip		
Skip capacity levelled	632.0		
Skip capacity heaped	760.0 I		
Operating weight (minmax.)	1,345.0 - 1,695.0 kg		
Engine			

Water-cooling

Diesel engine


Cylinder	3.0
Cylinder capacity	898.0 cm3
Inclined position max.	20.0 °
Effective power	15.2 KW
Nominal Engine speed	2,400.0 1/min
Exhaust-gas limit	EU Stage V
Engine Manufacturer	Kubota
Engine Designation	Z-902
Stroke	73.0 mm
Bore	72.0 mm
Environment Data	
Sound level LpA	87.0 dB(A)
Sound level LpA (Standard)	ISO 6396
Sound power LWA, guaranteed	101.0 dB(A)
Sound power LWA (Standard)	ISO 6395
Shipping and Storage	
Shipping weight	1,270.0 kg

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Cooling

Engine type

Dimensions

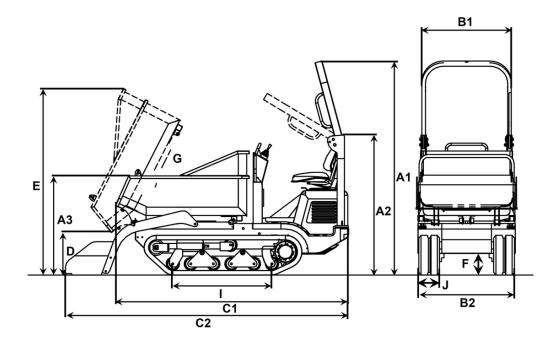

A1	Height ROPS	2,372 mm
A2	Height of ROPS tilted	2,022 mm
А3	Height front edge of skip	770 mm
B1	Width of skip	1,054 mm
B2	Width with self-loading equipment	1,080 mm
	Width of undercarriage	1,080 mm
C1	Total length without footboard	2,585 mm
C2	Length with self-loading equipment, without footboard	3,160 mm
D	Dumping height max.	472 mm
Е	Skip height tilted	2,070 mm
G	Dumping angle	63 °
1	Length chain stand	1,100 mm