



KT3610

Telehandler

Aiming high with compact dimensions

The vehicle has a length (without bucket) of only 5.03 meters and is 2.28 meters wide. This puts the vehicle in the "compact all-rounder" class, which also includes the successful KT407 model. With an operating weight of 8,200 kg (option-dependent) and the combination of compact dimensions and 3-part telescopic arm, the KT3610 achieves a maximum stacking height of 9.50 m and a maximum payload of 3.6 t.

Cab heights: Overall height of just 2.31 m with standard cab and 24-inch tyres as standard, optionally with a cab with increased height of 18 cm

Smart Handling: Due to the intelligent overload system there are no loads in the overload area and, as a result, the machine does not tip over lengthwise

Drive system: Sensitive working and high pushing power as a result of the variable, hydrostatic drive system

Ready for use: Robustness and reliability in combination with lift height and reach are perfect for the handling of bales.

Visibility: Perfect view of the working area due to the steeply sloping engine bonnet

Technical Data

Standard engine data

Engine manufacturer	Deutz
Drive output	100 kW
Drive output	136 PS
at max. rpm	2,300 U/min
Cylinder capacity	3,621 cm ³
Exhaust standard level	V
Exhaust aftertreatment	DOC / DPF / SCR

Weights

Payload (max.)	3,600 kg
Payload at max. reach	400 kg
Payload at max. stacking height	1,450 kg
Stacking height (max.)	9,500 mm
Payload max. (LSP 500 mm)	3,600 kg
Operating weight	7,600 - 8,200 kg
Thrust force (max.)	50 kN
Lift capacity (max.)	43 kN

Filling levels

Tank capacity for fuel	100 l
Tank capacity for hydraulic oil	100 l
Tank capacity for urea solution	9.5 l

Drive system

Travel speed Standard	0-30 km/h
Travel speed Option 1	0-20 km/h
Travel speed Option 2	0-40 km/h
Differential lock	100% connectible in the front axle (Option)

Hydraulic system

Work hydraulics discharge volume (max.)	140 l/min
---	-----------


Steering

Steering angle max.	38 degree
---------------------	-----------

Noise characteristic values

Guaranteed sound power level LwA (cabin)	101 dB(A)
Measured sound power level LwA	99.2 dB(A)
Sound pressure level at the operator's ear	72 dB(A)

Dimensions

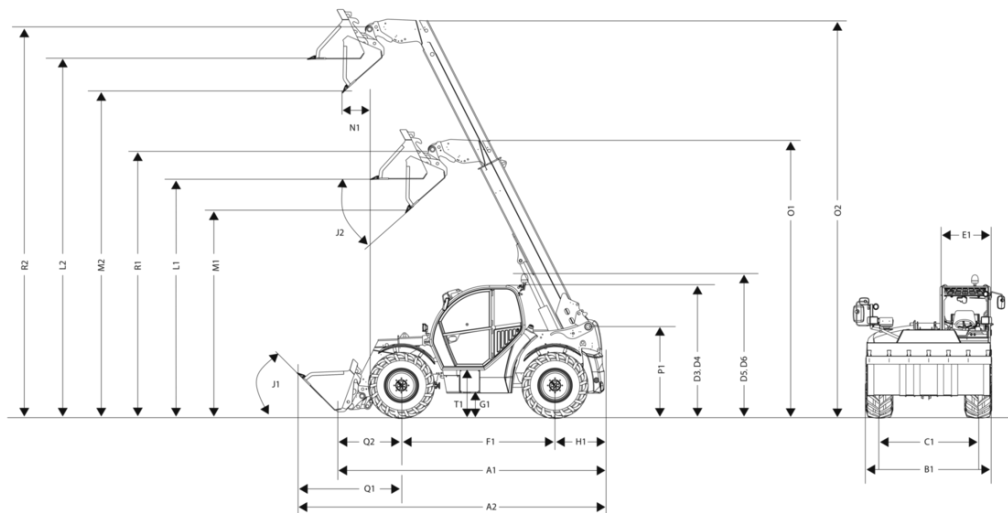

A1	Total length	5,030 mm
A2	Total length with bucket	5,830 mm
B1	Total width without bucket	2,285 mm
C1	rear	1,880 mm
D3	Total height of low cab	2,310 mm
E1	Cab width	990 mm
F1	Wheel base center	2,850 mm
G1	Ground clearance under axle and transmission, wading depth	415 mm
H1	Distance center rear wheel to rear	740 mm
I1	Rear approach angle (slope angle)	60 °
J1	Dumping angle	44 °
J2	Dumping angle	45 °
L1	Load-over height retracted	4,700 mm
L2	Load-over height extended	9,330 mm
M1	Dumping height retracted	4,200 mm
M2	Dumping height extended	8,760 mm
N1	Dumping width extended	1,980 mm
O1	Tele extension length retracted	5,480 mm
O2	Tele extension length extended	10,120 mm
P1	Total height telescopic arm mounting in frame	1,600 mm
Q1	Distance center front wheel to bucket leading edge	2,250 mm
Q2	Distance center front wheel bearing quick change frame	1,440 mm
R1	Bucket pivot point retracted	5,300 mm
R2	Bucket pivot point extended	10,000 mm
S1	Turning radius outer edge wheels	3,840 mm
S2	Turning radius outer edge bucket	5,160 mm
T1	Entry height cab floor	720 mm
D4	Total height of high cab	2,490 mm
D5	Total height of low cab with rotating beacon	2,540 mm
D6	Total height of high cab with rotating beacon	2,720 mm
K1	Max. stacking height	9,500 mm

Standard components

Cab

- ROPS/FOPS tested, sound proofed, vibration-damped, comfortable cabin with 360 degree all-round visibility
- Windshield wipers in front and rear, with intermittent wipers in front, indicator reset
- Indicator for interior cab lighting, door divided, upper door section adjustable to two positions by 180°
- Rear window can be opened
- Telescoping and adjustable tilting steering column
- Hanging pedals and removable floor mats
- Mechanically-sprung comfort operator's seat Grammer MSG85/721
- Electronically pilot-operated multifunction joystick with integrated travel direction selector and telescopic function
- 7" LCD color display to display all vehicle functions & jog dial
- Color-coded switches for hydraulic, electric, driving, and safety features
- Heater with a 3-speed fan, 6 air outlet nozzles, 2 defrosting nozzles
- 12 V outlet, bottle holder, sun shade
- Work light 1x LED on front (1000 lm), work light 1x LED on rear (1000 lm)
- Lighting according to road traffic regulations
- Manual battery isolator switch

Steering and work hydraulics

- 4 steering modes in series
- 3. control circuit and telescoping function with proportional control
- Continuous function 3rd control circuit can be switched on via toggle switch
- Oil volume for 3rd control circuit and all optional control circuits is adjustable via the rotary potentiometer
- Second generation "Smart Handling" overload and driver assistance system (bucket, stack, and manual mode)
- Test connections for working hydraulics and drive system

Engine

- Coarse meshed combination radiator for engine water, hydraulic oil and charge air
- Wide-opening engine hood, sight glass for hydraulic oil and cooling water
- Maintenance hatch for easy cleaning of the engine compartment

Drive system and axles

- Infinitely variable, hydrostatic transmission with load-dependent, electronic transmission control

Vehicle design and kinematics

- Two-part telescopic inner arm with synchronized extension and insertion
- Torsion-resistant steel frame in box profile design
- Telescopic arm guided by 26 sliding elements adjustable from outside
- End position damping in telescopic, lifting and tipping cylinders

Documentation

- Operator's manual, service manual

Options

Operator's cab - Cabine

- Air-sprung operator's seat (MSG95AL/722)
- Air-sprung operator's seat (MSG95AL/722), heated
- Left armrest
- Air-conditioning system
- Ventilated storage compartment (cooled with air-conditioning system)
- High cabin with heater for optimized all-round visibility (+180mm)
- Interior mirror incl. bracket for cell phone and USB outlet 2-way
- Compact exterior mirror on left
 - Not with:
 - External mirror electrically adjustable incl. mirror heating with automatic shut-off
- Radio-ready (antenna, speaker)
- Radio system (radio, antenna, speakers)
- Front view camera on right (incl. auxiliary monitor)
- Rear-view camera (integrated in main screen)
- Cab window right and rear, heated
- High cabin with heated cabin windows to right and rear
- External mirror electrically adjustable incl. mirror heating with automatic shut-off
- Mirror for trailer coupling
- Carbon filter for cabin air

Lighting

- LED rotating beacon (yellow)
- Work light LED (1000 Lumen), 1 additional unit on front, 1 additional unit on rear
- 2 work lights LED (1000 Lumen) on side of telescopic arm (outer pipe)
- LED lighting package (1000 Lumen) - (7 additional work lights - 1x front, 1x rear, 1x left, 2x right, 2x outer arm)
- LED lighting package (2000 Lumen) - (8 LED work lights) - omission of series work lights
- Rear additional lighting Basic (1000 Lumen)
- License plate lighting, incl. front license plate bracket - (standard)

Equipment for road traffic

- Data confirmation (ABE) for self-propelled work machine - (standard)
- EC tractor CoC (EC Certificate of Conformity tractor, (167/2013/EC - Class T1)
 - only in association with
 - Outlet for rear attachments, 7-pole
 - An attachment coupling (not railway coupling) must also be selected!
- EC tractor CoC (EC Certificate of Conformity tractor, 167/2013/EC - Class T1) + data confirmation - only for Germany!
 - only in association with
 - Outlet for rear attachments, 7-pole
 - An attachment coupling (not railway coupling) must also be selected!

Engine - Axles - Steering - Drive system

- DEUTZ TCD 3.6 S5 100 kW
- Hydrostat 30 km/h
- Hydrostat 20 km/h
- Ecospeed 40 km/h
- Ecospeed 40 km/h incl. Smart Driving

Tires

- Alliance 405/70-24 A-323 – traction profile
- Alliance 460/70R24 A-580 – traction profile
- Alliance 500/60-22.5 A-331 – traction profile

Quick change plates & Loading system

- Load stabilizer (vibration damper)
- Hydraulic quickhitch facility, Kramer system (telehandler "large")
- Mechanical quickhitch facility, System Manitou
- Hydraulic quickhitch facility, System Manitou
- Hydraulic quickhitch facility, System JCB (Q-fit)
- Hydraulic quickhitch facility, System Volvo TPV
- Hydraulic quickhitch facility, System Matbro

Hydraulics

- Auto Hitch attachment coupling (incl. hydr. control) and tipper connection
- Pressure release of 3rd control circuit
- Diverter valve in front on 3rd control circuit
- Tipper connection
- Automatic bucket return (ABR), including vibration function of the tipping cylinder
- Control circuit, rear attachment, double-acting
 - only in combination with:
 - Tipper connection
- Filling of the hydraulic system with environmentally friendly and biodegradable hydraulic oil
- 2-way multi-coupler
 - only in combination with:
 - Pressure release of 3rd control circuit
 - Hydraulic quick coupler system, Kramer System ("large" telehandler)
- 4-way multi-coupler
 - only in combination with:
 - Pressure release of 3rd control circuit
 - Diverter valve in front on 3rd control circuit
 - Hydraulic quick coupler system, Kramer System ("large" telehandler)

Electrical system

- Plug receptacle for front attachments, 4-pole
- Outlet for rear attachments, 7-pole

Safety options

- Mechanical oscillating axle lock
- Immobilizer system, integrated in the ignition switch key
- Underbody protection
 - only in association with
 - Cover for the drive train
- Cover for the drive train
- Fire extinguisher (2 kg)
- Dirt wipers, telescopic arm
- Red/white warning stripes (in accordance with DIN 30710)
- Oil level monitoring (hydraulic oil)
- Tipping cylinder lock
- Tire blow-out protection
- Dry lubrication (smooth paint) of telescopic arm
- Protective grating for windshield, removable (not approved for machine travel on public roads)
- CESAR DataTag-ID - only for countries that use this system within their legal instances, such as Great Britain

Paint

- Custom-made paint finish, one color according to RAL (gray parts are not included) *
- Protective measures for use in aggressive materials (salt and fertilizer use)
 - only in association with
 - Dry lubrication (smooth paint) of telescopic arm
 - Dirt wipers, telescopic arm
 - Cover for the drive train
- Overseas transport protection

* We reserve the right to reject paints that are similar to protected colors or color combinations by other manufacturers.

Other

- Low-speed control and manual throttle
 - 100 % differential lock
 - Maneuvering hitch
 - Automatic attachment coupling 38 mm – fixed to frame
 - Mechanical attachment coupling 32 mm – fixed to frame
 - Bearing block for attachment couplings height-adjustable (insert required for attachment coupling height-adjustable)
 - Automatic 38 mm attachment coupling insert for trailer mount height-adjustable
 - Ball hitch insert (K80) for trailer mount height-adjustable
 - Ball hitch insert (K80) for trailer mount height-adjustable, extended
 - Mechanical attachment coupling insert for trailer mount height-adjustable – 32 mm
 - CUNA D3 attachment coupling incl trailer mount height-adjustable
 - Hydraulic trailer brake valve (dual-line system)
 - Vacuum pre-filter
 - Cyclone pre-filter
 - Cyclone pre-filter Turbo III
 - Reversible fans
 - Air brake unit (dual-line system)
 - Engine pre-heating, fuel, hydraulic oil (230V)
-
- Pre-configured central lubrication system (lubrication line positioned in the arm)
 - (Fully automatic) central lubrication unit
 - EquipCare Dual ID

Extended warranties

- Security 24 months (2000 h)
- Security 36 months (3000 h)
- Security 48 months (3000 h)
- Security 48 months (4000 h)
- Security 48 months (5000 h)
- Security 60 months (4000 h)
- Security 60 months (5000 h)
- Power-Line (24 months or 2000 h)
- Power-Line (36 months or 3000 h)
- Power-Line (48 months or 3000 h)
- Power-Line (48 months or 4000 h)
- Power-Line (48 months or 5000 h)
- Power-Line (60 months or 4000 h)
- Power-Line (60 months or 5000 h)
- EquipCare 36 months (incl. App & Manager) - (series)