



**WACKER  
NEUSON**  
*all it takes!*



## DT10e

### Electric Track Dumper

The electric dumper for all occasions

The two low-installed batteries make the machine very stable even in an inclined position. The electric drive system also greatly reduces the service and energy costs. With a charge time of 8 hours and a running time of 8 hours at once, it fits into your average workday perfectly - charge at night and get going in the morning!

## Highlights

- Electric drive system
- Unlimited performance
- Battery charger on the machine
- Chargeable at a normal 220 V socket
- Very low noise pollution

## Technical Data

### Hydraulic

|                |           |
|----------------|-----------|
| Hydraulic pump | ZRP       |
| Flow rate max. | 5.0 l/min |

### Mechanical - Output Details

|              |          |
|--------------|----------|
| Travel speed | 4.0 km/h |
|--------------|----------|

### Mechanical Details

|                              |                    |
|------------------------------|--------------------|
| Length                       | 1,803.0 mm         |
| Width                        | 790.0 mm           |
| Height                       | 1,280.0 mm         |
| Weight                       | 680.00 kg          |
| Payload max.                 | 1,000.0 kg         |
| Skip capacity levelled       | 367.0 l            |
| Skip capacity heaped         | 427.0 l            |
| Skip capacity waterlevel     | 166.0 l            |
| Operating weight (min.-max.) | 890.0 - 1,030.0 kg |

### Motor

|                 |                    |
|-----------------|--------------------|
| Motor type      | Asynchronous motor |
| Nominal power   | 4.00 KW            |
| Nominal current | 33.0 A             |
| Nominal voltage | 80.0 V             |
| Nominal speed   | 1,800.0 1/min      |

### Environment Data

|                             |            |
|-----------------------------|------------|
| Sound level LpA             | 74.0 dB(A) |
| Sound level LpA (Standard)  | ISO 6396   |
| Sound power LWA, guaranteed | 94.0 dB(A) |
| Sound power LWA (Standard)  | ISO 6395   |


### Electrical System

|                 |              |
|-----------------|--------------|
| Charging Time   | 8.0 - 10.0 h |
| Type of battery | LiFePO4      |

### Shipping and Storage

|                 |          |
|-----------------|----------|
| Shipping weight | 815.0 kg |
|-----------------|----------|

## Dimensions

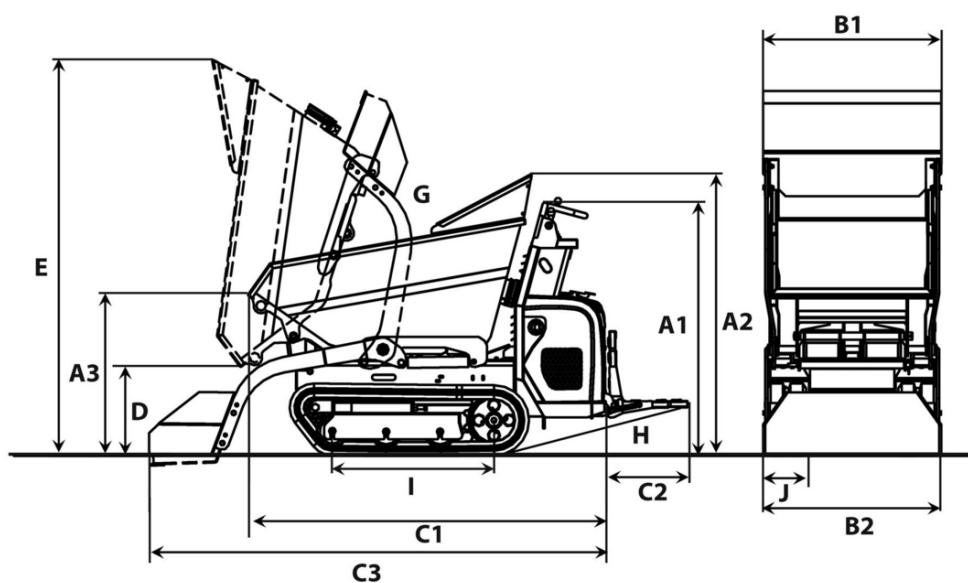

|    |   | Front tip skip | High tip skip |
|----|---|----------------|---------------|
| A1 | Height above operator's stand                         | 1,270 mm       | 1,270 mm      |
| A2 | Height over skip hand guard                           | 1,365 mm       | 1,365 mm      |
| A3 | Height front edge of skip                             | 801 mm         | 1,111 mm      |
|    | Height front edge of high tip skip raised             |                | 1,710 mm      |
| B1 | Width of skip   | 790 mm         | 764 mm        |
| B2 | Width of undercarriage                                | 830 °          | 790 mm        |
|    | Width with self-loading equipment                     | 830 mm         | 830 mm        |
| C1 | Total length without footboard                        | 1,803 mm       | 1,685 mm      |
| C2 | Length footboard                                      | 392 mm         | 392 mm        |
| C3 | Length with self-loading equipment, without footboard | 2,248 mm       | 2,208 mm      |
| D  | Dumping height max.                                   | 474 mm         | 863 mm        |
|    | Dumping height max., high tip skip raised             |                | 1,467 mm      |
| E  | Skip height tilted                                    | 1,905 mm       | 2,003 mm      |
|    | Skip height tilted, high tip skip raised              |                | 2,610 mm      |
| G  | Dumping angle   | 70 °           | 82 °          |
| H  | Rollback angle footboard                              | 14 °           | 15 °          |
| I  | Length chain stand                                    | 875 mm         | 875 mm        |