



## 4060T

### Telescopic wheel loaders

#### Technical Data

##### ■ Standard engine data

Engine manufacturer	Rehlko
Motor type	KDI 2504 TCR
Cylinder	4
Drive output	55.4 kW
Drive output	74.3 HP
at max. rpm	2,300 rpm
Cylinder capacity	151.46 in <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF

##### ■ Electrical system

Operating voltage	12 V
Battery	100 Ah
Alternator	120 A

##### ■ Weights

Operating weight	12,853 - 13,338 lb
Thrust force (max.)	4,070 daN
Lift capacity (max.)	4,645 daN
Tipping load with bucket – machine straight, loading frame horizontal	7,826 - 8,157 lb
Tipping load with bucket – machine pivoted, loading frame horizontal	6,834 - 7,121 lb
Tipping load with bucket – machine straight (extended)	4,365 - 4,586 lb
Tipping load with bucket – machine pivoted (extended)	3,770 - 3,968 lb
Tipping load with bucket - machine straight, loading frame in lowest position	10,472 - 10,869 lb
Tipping load with bucket - machine pivoted, loading frame in lowest position	9,149 - 9,524 lb
Tipping load with pallet fork – machine straight, loading frame horizontal	7,231 - 7,518 lb
Tipping load with pallet fork – machine pivoted, loading frame horizontal	6,349 - 6,592 lb
Tipping load with pallet fork – machine straight (extended)	4,365 - 4,564 lb

Tipping load with pallet fork – machine pivoted (extended)	3,814 - 3,990 lb
Tipping load with pallet fork - machine straight, transport position	8,576 - 8,907 lb
Tipping load with pallet fork - machine pivoted, transport position	7,540 - 7,826 lb

##### ■ Driver's cab

Driver's cab	Cab
--------------	-----

##### ■ Filling levels

Tank capacity for fuel	21.13 US gal
Tank capacity for hydraulic oil	8.45 US gal

##### ■ Drive system

Type of drive	ecDrive (Electronic Controlled Drive)
drive unit	hydrostatic via transfer gearbox and universal joint shaft
Speed levels	2
Axle	PA 1422
Travel speed Standard	0-12.43 mph
Travel speed Option 1	0-18.64 mph
Operating brake	Disc brakes (option: multi-disc brakes)
Parking brake	Disc brakes (option: multi-disc brakes)
Differential lock	100 % front axle + rear axle

##### ■ Hydraulic system

Drive hydraulics working pressure (max.)	7,252 psi
Work hydraulics discharge volume (max.)	22.72 (26.68) gpm
Work hydraulics working pressure (max.)	3,408 psi

##### ■ Kinematics

Kinematics type	Teleskoparm (Z-Kinematik)
Lifting cylinder	1
Tipping cylinder	1
Quick change system	hydraulic

##### ■ Steering

Steering type	hydraulically activated articulated pendulum steering
Steering cylinder	1

Oscillating angle	± 10 degree
-------------------	-------------

Specified sound pressure level LpA (cabin)	71 dB(A)
--------------------------------------------	----------


#### ■ Noise characteristic values

Average sound power level LwA (cabin)	99.8 dB(A)
Guaranteed sound power level LwA (cabin)	101 dB(A)

#### ■ Other information

DPF = diesel particulate filter  
 DOC = diesel oxidation catalyst  
 SCR = selective catalytic reduction  
 Tipping load calculation pursuant to ISO 14397

## Dimensions

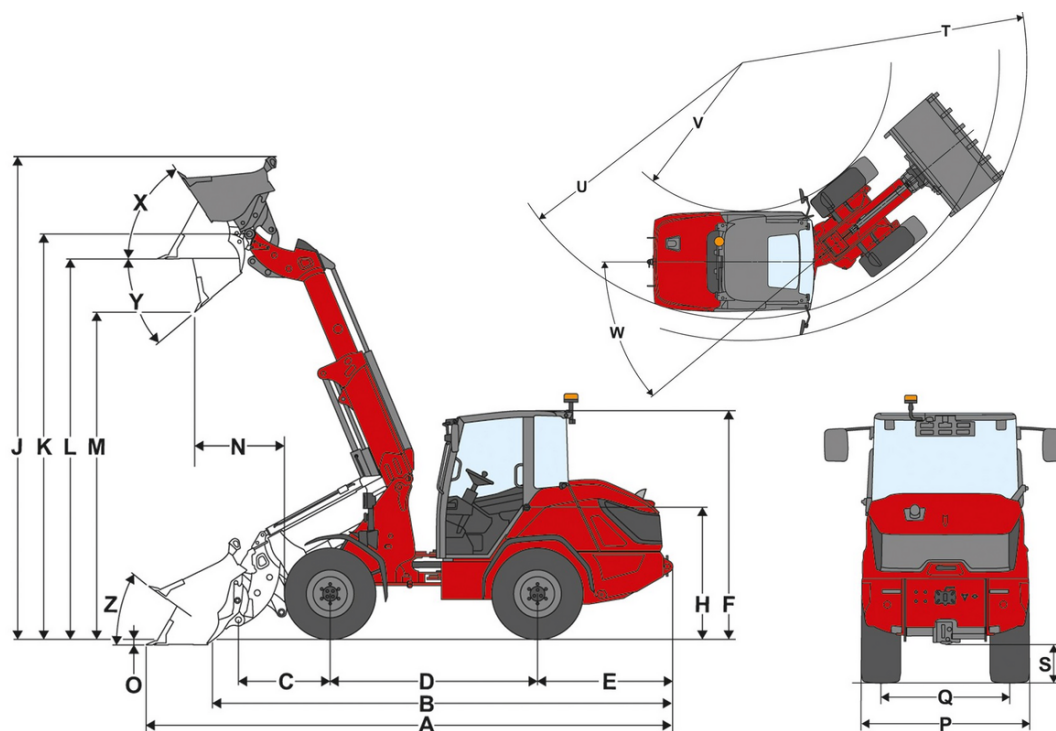

	Standard components	405 / 70 R 20 BKT MP513 ET30
<b>A</b>	Total length	240.9 in
<b>B</b>	Total length without bucket	202.4 in
<b>C</b>	Bucket pivot point (to center of axle)	47.6 in
<b>D</b>	Wheel base	91.5 in
<b>E</b>	Rear overhang	56.5 in
<b>F</b>	Height with cab	99.8 in
<b>H</b>	Seat height	59.4 in
<b>J</b>	Total working height	235.0 in
<b>K</b>	Bucket pivot point (max. lift height)	198.4 in
<b>L</b>	Load-over height telescopic arm extended	190.4 in
<b>M</b>	Dumping height telescopic arm extended	160.6 in
<b>N</b>	Reach (at M)	38.4 in
<b>O</b>	Digging depth	2.4 in
<b>P</b>	Total width	69.7 in
<b>Q</b>	Track width	53.5 in
<b>S</b>	Ground clearance	15.4 in
<b>T</b>	Maximum radius	183.1 in
<b>U</b>	Radius on the outer edge	157.1 in
<b>V</b>	Inner radius	82.7 in
<b>W</b>	Articulation angle	40 °
<b>X</b>	Rollback angle at max. lift height	56 °
<b>Y</b>	Dumping angle	40 °
<b>Z</b>	Rollback angle on ground	39 °