



# T4512

## Telehandlers

### Technical data

#### ■ Standard engine data

Engine manufacturer	Yanmar
Motor type	3TNV80FT
Cylinder	3
Drive output	18.4 kW
Drive output	24.7 HP
at max. rpm	2,600 rpm
Cylinder capacity	74.82 in <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	-
Average sound power level LwA (cabin)	93.5 dB(A)
Guaranteed sound power level LwA (cabin)	94 dB(A)
Specified sound pressure level LpA (cabin)	78 dB(A)

#### ■ Engine data Option 1

Engine manufacturer	Yanmar
Motor type	3TNV86CHT
Cylinder	3
Drive output	33.3 kW
Drive output	44.7 HP
at max. rpm	2,600 rpm
Cylinder capacity	95.69 in <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF
Average sound power level LwA (cabin)	94.1 dB(A)
Guaranteed sound power level LwA (cabin)	95 dB(A)
Specified sound pressure level LpA (cabin)	78 dB(A)

#### ■ Electrical system

Operating voltage	12 V
Battery	77 Ah
Alternator	80 A

#### ■ Weights

Payload (max.)	2,756 lb
Operating weight	6,063 - 6,393 lb

#### ■ Driver's cab

Driver's cab	Cab
--------------	-----

#### ■ Filling levels

Tank capacity for fuel	8.72 US gal
Tank capacity for hydraulic oil	9.51 US gal

#### ■ Drive system

Type of drive	ecDrive (Electronic Controlled Drive)
drive unit	hydrostatic via transfer case and cardan shaft
Speed levels	2
Axle	PAL 1155
Travel speed Standard	0-12,43 mph
Travel speed Option 1	0-18,64 mph
Operating brake	Hydraulically actuated disc brake on front axle acting on rear axle via cardan shaft
Parking brake	Electro-hydraulic spring-loaded brake on front axle, acting on rear axle via cardan shaft
Differential lock	100% front axle rear axle

#### ■ Hydraulic system

Drive hydraulics working pressure (max.)	5511 psi
Work hydraulics discharge volume (max.)	9,62 (10,99-18,49) gpm
Work hydraulics working pressure (max.)	3191 psi

## ■ Kinematics

Lifting cylinder	1
Tipping cylinder	1
Quick change system	mechanical (hydraulic)

## ■ Steering


Steering type	Hydraulic all-wheel steering with end position synchronization
---------------	--

Steering cylinder	2
Steering angle max.	2x38 degree
Oscillating angle of the rear axle	± 7 degree

## ■ Other information

DPF = Diesel Particulate Filter  
DOC = Diesel oxidation catalyst  
SCR = Selective Catalytic Reduction

## Dimensions

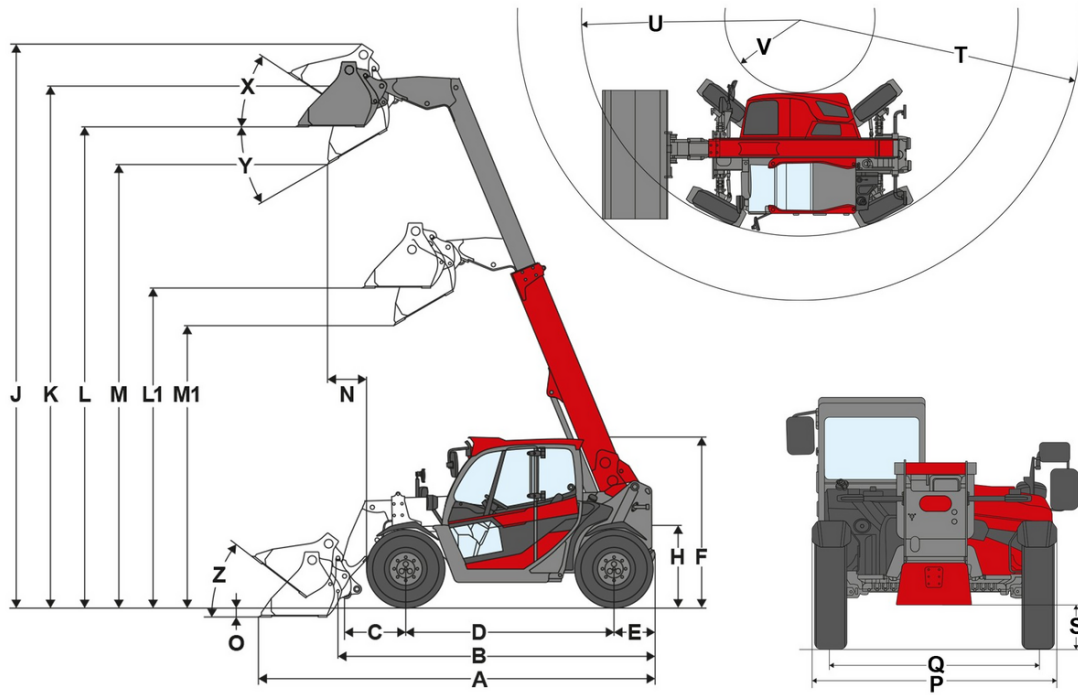

A	Total length	155.28 in
B	Total length without bucket	117.76 in
C	Bucket pivot point (to center of axle)	17.72 in
D	Wheel base	75.67 in
E	Rear overhang	16.81 in
F	Height with cab	78.54 in
H	Seat height	38.50 in
J	Total working height	207.87 in
K	Bucket pivot point (max. lift height)	178.62 in
L1	Load-over height telescopic arm retracted	116.10 in
L	Load-over height telescopic arm extended	163.90 in
M1	Dumping height telescopic arm retracted	95.08 in
M	Dumping height telescopic arm extended	142.91 in
N	Reach (at M)	21.93 in
O	Digging depth	3.58 in
P	Total width	61.57 in
Q	Track width	49.02 in
S	Ground clearance	11.57 in
T	Maximum radius	138.03 in
U	Radius on the outer edge	106.10 in
V	Inner radius	37.44 in
X	Rollback angle at max. lift height	52 °
Y	Dumping angle	31 °
Z	Rollback angle on ground	44 °