



## 2080 Wheel loaders

### Technical Data

#### ■ Standard engine data

Engine manufacturer	Deutz
Motor type	TD 2.9 L4 S5
Cylinder	4
Drive output	45 kW
Drive output	61 PS
at max. rpm	2,300 U/min
Cylinder capacity	2,900 cm <sup>3</sup>
Type of coolant	Water
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF
Average sound power level LwA (cabin)	98.8 dB(A)
Guaranteed sound power level LwA (cabin)	100 dB(A)
Specified sound pressure level LpA (cabin)	74 dB(A)

#### ■ Engine data Option 1

Engine manufacturer	Deutz
Motor type	TCD 2.9 L4 S5
Cylinder	4
Drive output	55.4 kW
Drive output	75 PS
at max. rpm	2,300 U/min
Cylinder capacity	2,900 cm <sup>3</sup>
Type of coolant	Water/charge air
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF
Average sound power level LwA (cabin)	100
Guaranteed sound power level LwA (cabin)	101
Specified sound pressure level LpA (cabin)	77

#### ■ Electrical system

Operating voltage	12 V
-------------------	------

Battery	100 Ah
---------	--------

Alternator	95 A
------------	------

#### ■ Weights

Operating weight	4,300 kg
------------------	----------

Tipping load with bucket – machine straight, loading frame horizontal	3,719 kg
---	----------

Tipping load with bucket – machine pivoted, loading frame horizontal	3,113 kg
--	----------

Tipping load with pallet fork – machine straight, loading frame horizontal	3,170 kg
--	----------

Tipping load with pallet fork – machine pivoted, loading frame horizontal	2,662 kg
---	----------

#### ■ Driver's cab

Driver's cab	Cab
--------------	-----

#### ■ Filling levels

Tank capacity for fuel	65 l
------------------------	------

Tank capacity for hydraulic oil	50 l
---------------------------------	------

#### ■ Drive system

Type of drive	Hydrostatic
---------------	-------------

drive unit	universal joint shaft
------------	-----------------------

Speed levels	2
--------------	---

Axle	PA 1200
------	---------

Travel speed Standard	0-20 km/h
-----------------------	-----------

Travel speed Option 1	0-28 km/h
-----------------------	-----------

Operating brake	Hydrostatic drive system acting on all 4 wheels (wear-free)
-----------------	---

Parking brake	Service and parking brake in the drive train acts on all 4 wheels
---------------	---

Differential lock	100 % front axle + rear axle
-------------------	------------------------------

#### ■ Hydraulic system

Drive hydraulics working pressure (max.)	450 bar
--	---------

Work hydraulics discharge volume (max.)	57,5 (74-115) l/min
---	---------------------

Work hydraulics working pressure (max.)	210 bar
---	---------

## ■ Kinematics

Kinematics type	PZ
Lifting cylinder	2
Tipping cylinder	1
Quick change system	hydraulic

## ■ Steering


Steering type	hydraulically activated articulated pendulum steering
---------------	---

Steering cylinder	1
Oscillating angle	±12 degree

## ■ Other information

FSD = operator's canopy  
DPF = diesel particulate filter  
DOC = diesel oxidation catalyst  
SCR = selective catalytic reduction  
Tipping load calculation pursuant to ISO 14397

## Dimensions

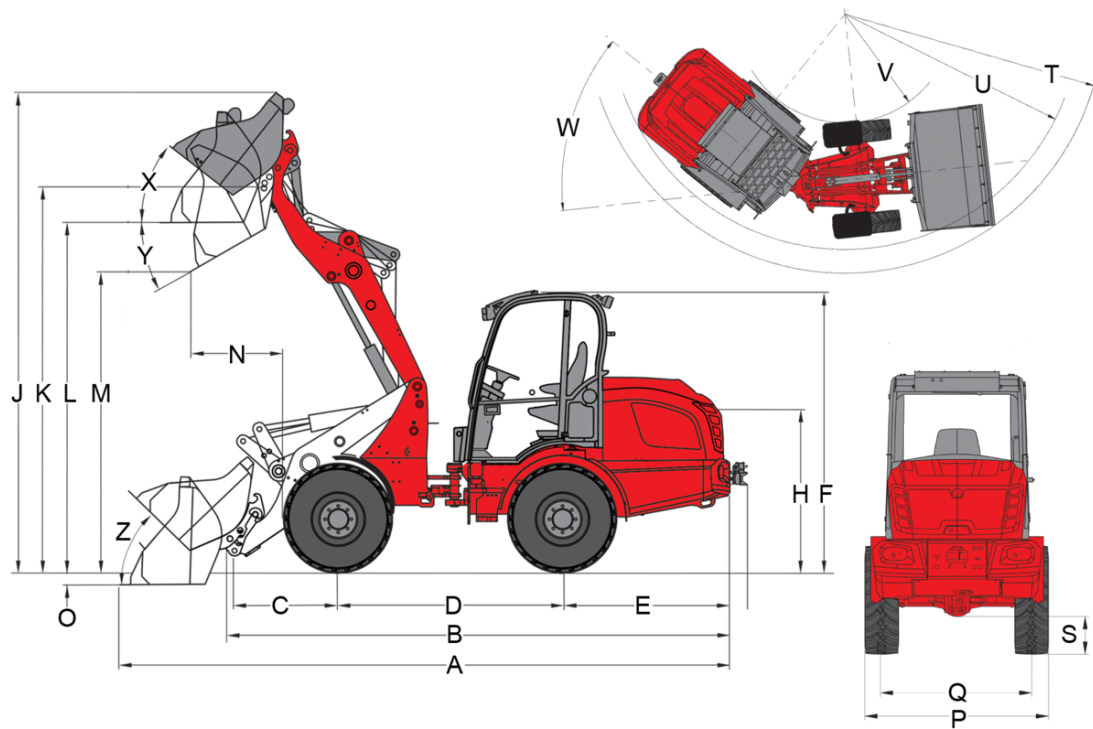

### PZ-kinematics (Standard)

	Standard components	11.5/80 - 15.3 AS ET40
<b>A</b>	Total length	5,160 mm
<b>B</b>	Total length without bucket	4,190 mm
<b>C</b>	Bucket pivot point (to center of axle)	680 mm
<b>D</b>	Wheel base	2,050 mm
<b>E</b>	Rear overhang	1,420 mm
<b>F</b>	Height with operator's canopy (fixed)	
	Height with fold-down operator's canopy (EPS)	
	Height with fold-down operator's canopy (EPS), folded down	
	Height with lowerable operator's canopy (EPS Plus), lowered	
	Height with lowerable operator's canopy (EPS Plus)	
	Height with lowered operator's canopy	
	Height with operator's canopy raised	
	Height with cab lowered	2,360 mm
	Height with cab raised	2,540 mm
	Height with cab	
<b>H</b>	Seat height	1,430 mm
<b>J</b>	Total working height	4,020 mm
<b>K</b>	Bucket pivot point (max. lift height)	3,240 mm
<b>L</b>	Load-over height	2,950 mm
<b>M</b>	Dumping height	2,320 mm
<b>N</b>	Reach (at M)	280 mm
<b>O</b>	Digging depth	70 mm
<b>P</b>	Total width	1,410 mm
<b>Q</b>	Track width	1,120 mm
<b>S</b>	Ground clearance	300 mm
<b>T</b>	Maximum external radius	3,650 mm
<b>U</b>	Radius on the outer edge	3,320 mm
<b>V</b>	Inner radius	1,730 mm
<b>W</b>	Articulation angle	45 °
<b>X</b>	Rollback angle at max. lift height	49 °
<b>Y</b>	Dumping angle	44 °
<b>Z</b>	Rollback angle on ground	43 °

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

## Standard components

### Engine

- Deutz TD 2.9 L4 S5, 45 kW / 61 hp, stage V

### Tires

- 11.5/80-15.3 AS ET40, profile AS, width 1410 mm

### Steering system

- Hydraulic articulated pendulum steering, pendulum angle  $\pm 12^\circ$
- Steering cylinder: 1

### Drive system

- Hydrostatic all-wheel drive, driving direction selectable via joystick
- Service brake: Hydrostatic drive acting on all 4 wheels (wear-free)
- Central service and parking brake in drive train acting on all 4 wheels
- Differential lock 100 %, electric-hydraulic switchable on front and rear axle

### Hydraulics

- 3rd Front control circuit electrically proportional parallel via joystick, incl. double detent; hydraulic oil cooler
- Float position for lift cylinder

### Operator's cab

- Comfort cab with heating and ventilation, laterally tiltable, ROPS / FOPS tested
- Comfort seat with seat belt full suspension, weight, back and longitudinal adjustment
- Hydraulically pre-controlled joystick with direction switch and integrated push button for differential lock
- Worklights 2 front and 2 rear
- Operating hours meter
- Fuel gauge
- Adjustable steering wheel

### Other

- Tool box in the rear of the vehicle
- Lighting system according to StVZO
- Bucket level indicator
- Self-recovery coupling

### Loading system

- Weidemann hydraulic

### EquipCare (telematics)

- EquipCare 36 months (incl. App & Manager)

### Trailer and recovery equipment

- Self-recovery coupling (Not approved for trailer operation!)

### Operator's seat

<ul><li>Self-recovery coupling (Not approved for trailer operation!)</li></ul>

## Options

### Operator's cab

- 2-door, comfort cabin, high
- Storage box with bottle holder (left next to the operator's seat)
- Radio DAB+-ready (aerial, speaker)
- Radio DAB+ complete
- Air-conditioning system
- Cabin outlet 230 V (connection power max. 2000 W), (Only works with connected engine pre-heating on the 230 V grid)

### Operator's seat

- Fabric seat; heated seats (MSG 85)
- Fabric seat; air suspension (MSG 95AL/722)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

- Fabric seat; air suspension; heated seats (MSG 95AL/732)

#### Lighting

- LED work lights, 2 in front, 2 in rear
- Rotating beacon (yellow) (National regulations must be observed!)

#### StVZO – equipment

- Individual operating permit > 25 km/h
- Individual operating permit > 25 km/h
- Registration plate mounting

#### Engine

- Deutz TCD 2.9 L4 S5, 55,4 kW / 75 hp, stage V
- Hand throttle
- Engine preheating (cooling water) + hydraulic oil preheating 230 V

#### Drive system & Axles

- 28 km/h (Speed increase)
- Hand inching (low-speed control)

#### Tires

- 15.0/55-17 AS ET0, profile AS, width 1600 mm
- 15.0/55-17 AS ET-40, profile AS, width 1660 mm
- 425/55 R 17 AS ET-40 Alliance 570, profile AS, width 1700 mm
- 31x15.50-15 EM ET-37, profile EM, width 1680 mm
- 12-16.5 EM ET0, profile EM, width 1500 mm
- 12-16.5 EM ET45, profile EM, width 1415 mm
- 15.5/55 R 18 EM ET0, profile EM, width 1570 mm
- 33x15.50-15 RP ET-37, profile RP, width 1680 mm
- 12-16.5 Sure Trax ET0 BKT, profile SureTrax, width 1530 mm

#### Water filling

- Water filling valves without filling (front wheels)
- Water filling valves without filling (rear wheels)
- Water filling valves without filling (front and rear wheels)
- Water filling valves with filling (front wheels)
- Water filling valves with filling (rear wheels)
- Water filling valves with filling (front and rear wheels)

#### Loading system

- Loading swing arm damping
- Lowering brake valve (hose burst valves for lift and tipping cylinders)

#### Quick change plates

- Euro hydraulic
- SkidSteer hydraulic
- SMS hydraulic
- Kramer hydraulic

#### Hydraulics in front

- Front pressureless return (incl. leakage oil line)
- Working hydraulics (74 l/min) Large pump
- High Flow - Power hydraulics single-acting (115 l/min)
- 3rd Control circuit electric proportional serial
- 4th Additional control circuit electrically proportional parallel
- Additional hydraulic oil cooler

#### Hydraulics in rear

- Pressureless return in rear
- One hydraulic connection rear double-acting via changeover valve (operation: Via switch (0 - 1) in joystick console + 3rd control circuit)
- One rear hydraulic connection (51 l/min) double-acting (two couplings) incl. separate control valve (Operation: Via switch (1 - 0 - 2) in joystick console)
- Two rear hydraulic connections (51 l/min) double-acting (four couplings) incl. separate control valve (operation: 1 DW connection via switch (1 - 0 - 2), 1 DW connection via pushbutton (1 - 0 - 2)), (connections can be operated simultaneously)

#### Bio-hydraulic oil

- Shell PANOLIN S4 HLP Synth 46 (Bio-hydraulic oil)

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

#### **Electrical connections in front**

- Front socket 7-pin for lighting front attachments
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function push-button, 2nd Function latching)
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function latching, 2nd Function push-button)
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function push-button, 2nd Function push-button)
- Front socket 3-pin for double function (operation: Via 2 buttons on the joystick; 1st Function latching, 2nd Function latching)

#### **Electrical connections in rear**

- Rear 7-pin socket for lighting rear attachments
- Rear 3-pin socket (operation: Via switch (1 - 0 - 2) in joystick console)

#### **Additional weight**

- Ballast weight base plate (122 kg)

#### **Safety options**

- Reversing warning device (acoustic)
- Lowering brake valve (pipe breakage protection lifting and tipping cylinder)
- Immobilizer (operation via coded ignition key)

#### **Other**

- Battery cut-off switch 2 circuits
- (disconnection of the on-board power supply and the generator via 2 switching paths from the battery)
- Hand lever grease press
- Combination bag (warning triangle / first aid kit)
- Set of tools
- Fully automatic central lubrication unit

#### **Warranty extension\***

- Economy 24 months (2500 h)
- Economy 36 months (3000 h)
- Economy 48 months (3500 h)
- Economy 60 months (4000 h)
- Premium 24 months (3000 h)
- Premium 36 months (4000 h)
- Premium 48 months (5000 h)
- Premium 60 months (6000 h)

\*The offers regarding the warranty extension in Germany are currently being revised - more information will follow as quickly as possible.

#### **Custom-made paint finish**

- Special painting RAL single color - instead of Weidemann red
- Special painting RAL multicolored

#### **Trailer and recovery equipment**

- Trailer hitch automatic

#### **Self-propelled work machines with ball hitch**

- Trailer hitch automatic