


# DT15

## Track Dumper

### Maximum application power

The DT15 is the ideal transporter on the construction site for extensive work. The large skip selection combined with the comfortable and intuitive hydrostatic drive system as well as the high payload make it the perfect versatile material handler. The single-piece engine hood and the optimal arrangement of the service points also make daily maintenance much easier, saving time and effort. The low center of gravity makes it a trustworthy partner in material transport, even with a high load.

## Highlights

- Hydrostatic drive
- Interchangeable skip versions
- Operator's seat
- Entry and exit on both sides

## Technical Data

### Hydraulic

| | |
|---|---|
| Hydraulicpump | Variable displacement and gear pump |
| Flow rate max. | 25.1 gal/mi |

### Mechanical - Output Details

| | |
|---|---|
| Travel speed | 4.7 m/H |

### Mechanical Details

| | |
|---|---|
| Length | 105.3 in |
| Width | 43.4 in |
| Height | 93.4 in |
| Weight | 2,292.81 lb |
| Payload max. | 3,306.9 lb |
| Skip | Front tip skip |
| Skip capacity levelled | 0.8 yd3 |
| Skip capacity heaped | 1.0 yd3 |
| Operating weight (min.-max.) | 2,965.2 - 3,736.8 lb |

### Engine

| | |
|---|---|
| Cooling | Water-cooling |
| Engine type | Diesel engine |
| Cylinder | 3.0 |
| Cylinder capacity | 54.8 Inch3 |
| Inclined position max. | 20.0 ° |
| Effective power | 20.4 hp |
| Nominal Engine speed | 2,400.0 1/min |
| Exhaust-gas limit | EU Stage V |
| Engine Manufacturer | Kubota |
| Engine Designation | Z-902 |
| Stroke | 73.0 mm |
| Bore | 72.0 mm |

### Environment Data

| | |
|---|---|
| Sound level LpA | 87.0 dB(A) |
| Sound level LpA (Standard) | ISO 6396 |
| Sound power LWA, guaranteed | 101.0 dB(A) |
| Sound power LWA (Standard) | ISO 6395 |


### Shipping and Storage

| | |
|---|---|
| Shipping weight | 2,799.9 lb |

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.


Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com

## Dimensions

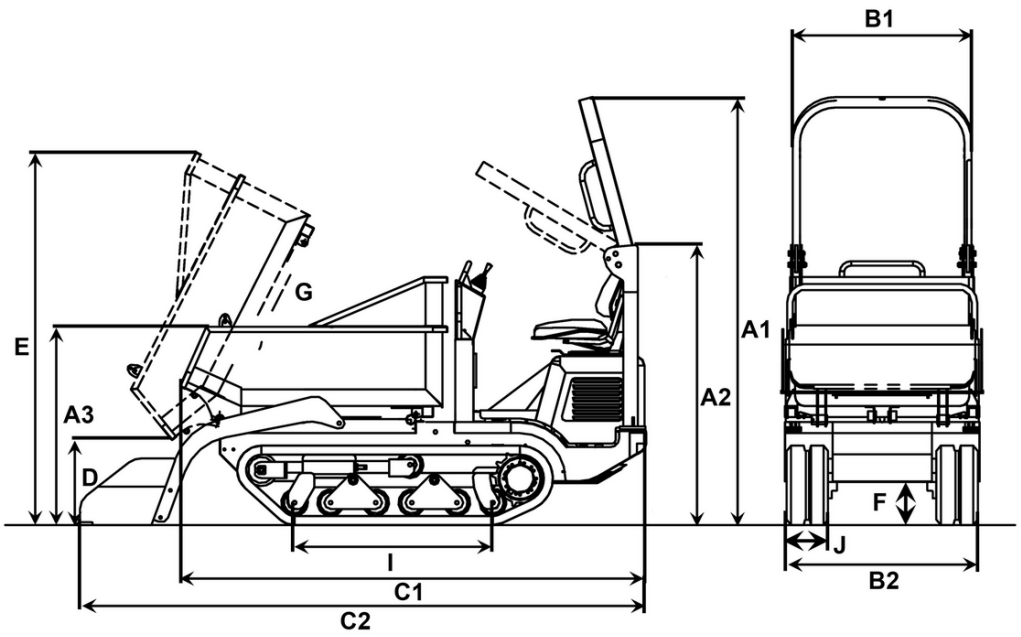


| | | Front tip skip | Swivel tip skip | High tip skip | 3-sided tilt platform | Concrete mixer |
|---|---|---|---|---|---|---|
| A1 | Height ROPS | 93.39 in | 93.39 in | 93.39 in | 93.39 in | 93.39 in |
| A2 | Height of ROPS tilted | 79.61 in | 79.61 in | 79.61 in | 79.61 in | 79.61 in |
| A3 | Height front edge of skip | 30.31 in | 47.64 in | 43.46 in | 45.28 in | 49.37 in |
| | Height front edge of high tip skip raised | | | 86.34 in | | |
| B1 | Width of skip | 41.5 in | 43.39 in | 39.37 in | 40.16 in | |
| B2 | Width with self-loading equipment | 42.52 in | | 44.13 in | | 42.52 in |
| | Width of undercarriage | 42.52 in | 42.52 in | 42.52 in | 42.52 in | 42.52 in |
| C1 | Total length without footboard | 101.77 in | 105.28 in | 102.72 in | 103.94 in | 94.61 in |
| C2 | Length with self-loading equipment, without footboard | 124.41 in | | 132.48 in | | 127.95 in |
| D | Dumping height max. | 18.58 in | 31.89 in | 34.37 in | 14.96 in | 30 in |
| | Dumping height max., high tip skip raised | | | 77.28 in | | |
| E | Skip height tilted | 81.5 in | 93.74 in | 93.82 in | 80.32 in | 64.84 in |
| | Skip height tilted, high tip skip raised | | | 136.69 in | | |
| F | Ground clearance | 8.82 in | 8.82 in | 8.82 in | 8.82 in | |
| G | Dumping angle | 63 ° | 84 ° | 78 ° | 63 ° | 62 ° |
| I | Length chain stand | 43.31 in | 43.31 in | 43.31 in | 43.31 in | 43.31 in |
| J | Track width | 9.06 in | 9.06 in | 9.06 in | 9.06 in | 9.06 in |

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.


Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com