



DV60

Dual View Dumper

Power for more safety

More space for the legs and an exit option on both sides allow the DV60 to be used even more safely, with a payload of up to 6 tons. In the power version now with extra power under the hood. The hill-hold function and seat belt monitoring with optional start release take the safety of the machine to a new maximum and already think for the operator before it is too late. Many additional comfort features in the basic machine or as an option additionally ensure the comfort factor for the operator.

Highlights

- Swivel seat with legroom and flexible exit
- Seat belt monitoring with start release
- Power version
- Active Sense Control
- Skip changing system

Technical Data

■ Hydraulic

Operating pressure hydraulics	240.0 bar
Flow rate	73.0 l/min
Tank capacity	48.0 l

Engine type	Diesel engine
Cylinder	4.0
Cylinder capacity	2,924.0 cm ³
Fuel	HVO EN15940
Tank capacity	60.0 l

■ Mechanical - Output Details

Nominal rotation speed	2,300.0 1/min
Travel speed	25.0 km/h

Effective power	55.4 KW
Nominal Engine speed	2,300.0 1/min
Exhaust-gas limit	EU Stage V
Engine Manufacturer	Deutz

■ Mechanical Details

Length	4,441.0 mm
Width	2,328.0 mm
Height	3,435.0 mm
Payload	6,000.0 kg
Skip	Front tip skip
Skip capacity levelled	2,700.0 l
Skip capacity heaped	3,500.0 l
Skip capacity waterlevel	1,900.0 l
Pendulum angle	11.0 °
Operating weight (min.-max.)	4,220.0 - 4,549.0 kg

Sound power LWA, guaranteed	101.0 dB(A)
Exhaust-gas limit	EU Stage V

■ Environment Data

Turning radius	6,110.0 mm
Articulation angle	29.0 °
Hydraulik Pump	Axialpistonpump
Flow rate	123.0 l/min
Tires	405/70-20

■ Engine

Cooling	Water-cooling
---------	---------------

Available engines


100 kW Turbo diesel engine (Stage 5)

Engine type	Diesel engine
Effective power	100 KW
Nominal Engine speed	2,300 1/min
Starter battery Voltage	12 V
Engine Manufacturer	Deutz
Engine Designation	TCD3.6 L4

55,4 kW Diesel engine (Stage 5)

Cooling	Water-cooling
Engine type	Diesel engine
Engine operating mode	four-stroke
Cylinder	4
Cylinder capacity	2,924 cm ³
Power rating max.	55.4 KW
Engine speed (Power max.)	2,300 1/min
Engine Manufacturer	Deutz
Engine Designation	TCD 2,9 L4
Alternator	12V DC - 95A

Dimensions

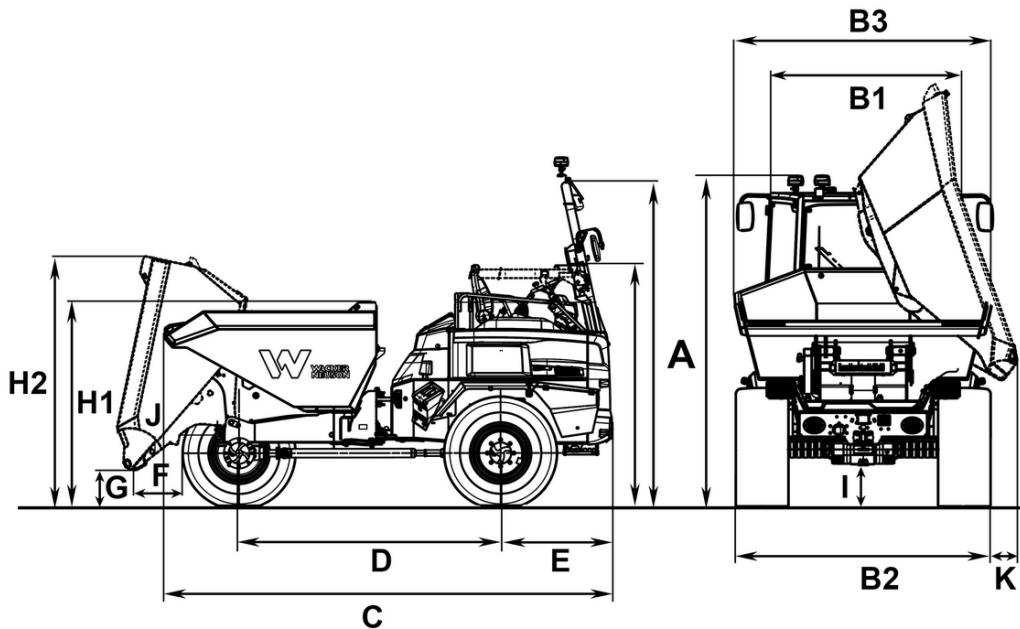

		Front tip skip	Swivel tip skip
A	Height ROPS	3,435 mm	3,435 mm
	Height ROPS with rotating beacon	3,545 mm	3,545 mm
A	Height of ROPS tilted	2,425 mm	2,425 mm
	Height with cab	2,926 mm	2,926 mm
A	Height of cab with rotating beacon	3,091 mm	3,091 mm
B1	Width of cab	1,629 mm	1,629 mm
B2	Width of vehicle	2,196 mm	2,196 mm
B3	Width of skip	2,328 mm	2,217 mm
C	Total length ROPS	4,448 mm	4,699 mm
	Total length of cab	4,448 mm	4,700 mm
D	Wheel base	2,485 mm	2,485 mm
E	Rear overhang	1,157 mm	1,157 mm
F	Dumping width	581 mm	599 mm
G	Dumping height max.	368 mm	1,092 mm
H1	Skip height	2,033 mm	2,002 mm
H2	Skip height tilted	2,402 mm	3,631 mm
I	Ground clearance	362 mm	362 mm
J	Dumping angle	50 °	48 °
K	Dumping width lateral		245 mm
			157 mm