



KRAMER
on the safe side



1445e

Telehandler

The ultra-compact electric telehandler

The electrically-powered telehandler 1445e is equipped with a 96V lithium ion battery, which enables a running time of up to 4 hours running time without interim charging depending on the equipment. With a height of under 2 meters and a width of approx. 1.60 meters, as well as a payload of 1,450 kilograms, it also provides impressive power ratings. With the fully electric wheel loader 1445e, CO₂ restrictions, soot particle limit values or noise emissions values to be met will no longer play a role in your daily work. The 1445e works locally emission-free, thereby protecting the environment and the user, and scores points in matters of efficiency and economy.

Exhaust emissions: No local exhaust emissions and clearly reduced noise level

Battery technology: Powerful 96 V lithium-ion battery with a capacity of 18 kWh or 28 kWh

Loading: An integrated on-board charger with up to 6 kW enables fast charging

Operating costs: Lower maintenance costs compared with conventional diesel drive systems

Compact dimensions: Vehicle width under 1.60 m and vehicle height under 2 m

Technical Data

■ Standard engine data

Exhaust standard level	V
------------------------	---

■ Electric motor

Motor traction drive	23,2 kW
Motor work hydraulics	25.2 kW

■ Weights

Payload (max.)	1,450 kg
Payload at max. reach	725 kg
Payload at max. stacking height	1,450 kg
Stacking height (max.)	4,301 mm
Payload max. (LSP 500 mm)	1,450 kg
Operating weight	3,050 - 3,250 kg

■ Filling levels

Tank capacity for hydraulic oil	36 l
---------------------------------	------

■ Drive system

Travel speed Standard	0-15 km/h
Travel speed Option 1	0-20 km/h
Travel speed Option 2	0-25 km/h

■ Hydraulic system

Work hydraulics discharge volume (max.)	42 l/min
---	----------


■ Steering

Steering angle max.	38 degree
Oscillating angle of the rear axle	14 degree

■ Noise characteristic values

Guaranteed sound power level L _{WA} (operator's canopy)	87 dB(A)
Measured sound power level L _{WA}	85.7 dB(A)
Sound pressure level at the operator's ear	73 dB(A)

Dimensions

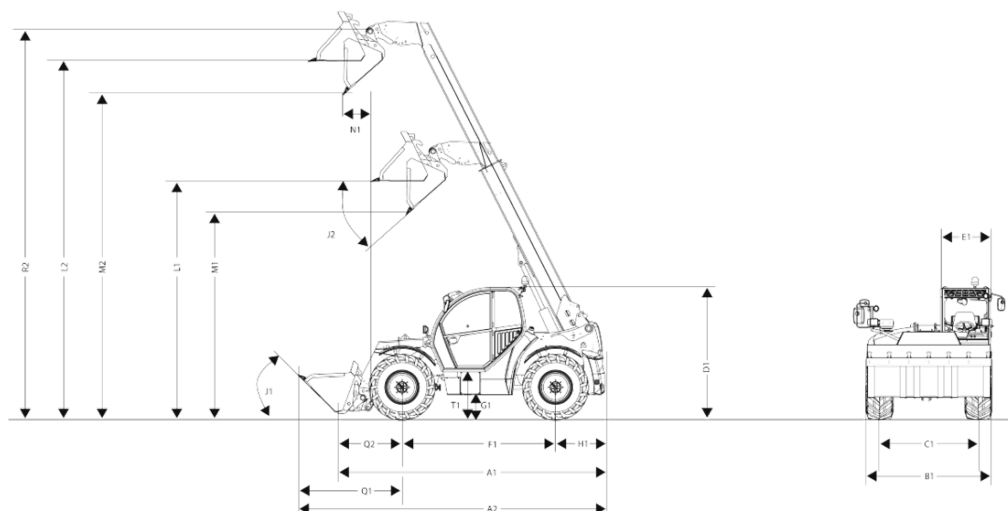

A1	Total length	3,092 mm
A2	Total length with bucket	4,215 mm
B1	Total width without bucket	1,554 mm
C1	Front track: rear	1,245 mm
D1	Total height	1,995 mm
E1	Cab width	702 mm
F1	Wheel base center	1,922 mm
H1	Distance center rear wheel to rear	498 mm
J1	Dumping angle	38 °
J2	Dumping angle	36 °
K1	Max. stacking height	4,190 mm
L1	Load-over height: retracted	3,010 mm
L2	Load-over height: extended	4,224 mm
M1	Dumping height: retracted	2,272 mm
M2	Dumping height: extended	3,486 mm
N1	Dumping width: extended	669 mm
Q1	Distance center front wheel to bucket leading edge	1,699 mm
Q2	Distance center front wheel bearing quick change frame	450 mm
R2	Bucket pivot point: extended	4,537 mm
S1	Turning radius outer edge wheels	2,695 mm
S2	Turning radius outer edge bucket	3,660 mm
T1	Entry height cab floor	405 mm