



## DV100

## **Dual View Dumper**

The measure of class and safety.

The powerful engine combined with the high payload (up to 10 tons) combine high material handling with the pulling power it needs. Efficiency utilized to the maximum. And the high safety precautions of the machine such as the entry in signal color, the hill-hold function for mountain travel or the special reversing tone prevent accidents and inattentiveness. This size is a real must-have on the construction site. More power, more bite. With the larger engine, you immediately feel the power during all work and on the road. More tractive force and better acceleration, on any terrain.

## Highlights


- Swiveling operator's seat with plenty of legroom
- Seat belt monitoring with start release
- Fold-down armrest for entry and exit from both sides
- 10-ton payload
- Active Sense Control

## Technical Data

Hydraulic		Engine type	Diesel engine
Operating pressure hydraulics	240.0 bar	Cylinder	4.0
Flow rate	73.0 l/min	Cylinder capacity	2,924.0 cm3
Tank capacity	48.0 l	Fuel	HVO EN15940
Mechanical - Output Details		Tank capacity	60.0 l
Nominal rotation speed	2,300.0 1/min	Effective power	55.4 KW
Travel speed	25.0 km/h	Nominal Engine speed	2,300.0 1/min
Mechanical Details		Maximum torque	260.0 Nm
Length	4,660.0 mm	Exhaust-gas limit	EU Stage V
Width	2,420.0 mm	Engine Manufacturer	Deutz
Height	3,029.0 mm	Engine Designation	TD2.9 L4
Payload	10,000.0 kg	Environment Data	
Skip	Front tip skip	Sound power LWA, guaranteed	101.0 dB(A)
Skip capacity levelled	4,150.0 l	Chassis	
Skip capacity heaped	5,000.0 l	Turning radius	6,660.0 mm
Skip capacity waterlevel	2,550.0	Articulation angle	28.0 °
Pendulum angle	11.0 °	Hydraulik Pump	Axialpistonpump
Operating weight (minmax.)	4,931.0 - 5,132.0 kg	Flow rate	123.0 l/min
Engine			
Cooling	Water-cooling		

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

2025-06-28

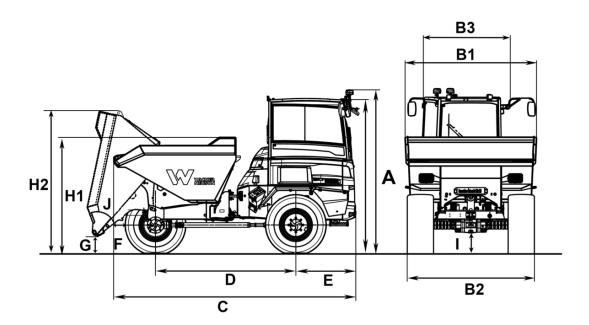

А	Height with cab	2,974 mm
	Height of cab with rotating beacon	3,139 mm
B1	Width of cab	1,731 mm
B2	Width of vehicle	2,420 mm
B3	Width of skip	2,504 mm
С	Total length of cab	4,660 mm
D	Wheel base	2,700 mm
Е	Rear overhang	1,157 mm
F	Dumping width	729 mm
G	Dumping height max.	333 mm
H1	Skip height	2,073 mm
H2	Skip height tilted	2,740 mm
1	Ground clearance	390 mm
J	Dumping angle	49 °

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.