





# **DT05**

Engine type

# **Track Dumper**

The space saver

It really comes into its own in conditions where space is tight and maneuverability is a must. Its very compact dimensions allow driving through a normal 80cm-wide door with no problem. Easy processing and intuitive functions ensures low service and operating costs. The powerful drive system reliably takes the machine where it needs to go, even with a full skip and operator.

## Highlights

- Hydrostatic drive
- Small dimensions
- Diesel or gasoline engine
- Hanging suspension-mounted rollers
- Smooth ride characteristics

#### **Technical Data**

Hydraulic

,		
Hydraulicpump	ZRP	
Flow rate max.	30.0 l/min	
Mechanical - Output Details		
Travel speed	3.9 km/h	
Mechanical Details		
Length	1,630.0 mm	
Width	660.0 mm	
Height	1,185.0 mm	
Weight	370.00 kg	
Payload max.	500.0 kg	
Skip	Front tip skip	
Skip capacity levelled	273.0	
Skip capacity heaped	313.0	
Operating weight (minmax.)	495.0 - 620.0 kg	
Engine		
Cooling	air cooling	

Liigiile type	dasonne engine
Cylinder capacity	196.0 cm3
Inclined position max.	20.0 °
Effective power	4.5 KW
Nominal Engine speed	3,600.0 1/min
Engine Manufacturer	Honda
Engine Designation	GX200
Stroke	54.0 mm
Bore	68.0 mm
Environment Data	
Sound level LpA	83.0 dB(A)
Sound level LpA (Standard)	ISO 6396
Sound power LWA, guaranteed	99.0 dB(A)
Sound power LWA (Standard)	ISO 6395
Shipping and Storage	
Shipping weight	420.0 kg

Gasoline engine


The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

# Available engines

## 4,8 kW Diesel engine with electric starter

Engine type	Diesel engine
Cylinder	1
Cylinder capacity	320 cm3
Effective power	4.8 KW
Engine Manufacturer	Yanmar
Engine Designation	L70N6
Stroke	67 mlai
Bore	78 mlai

### Dimensions

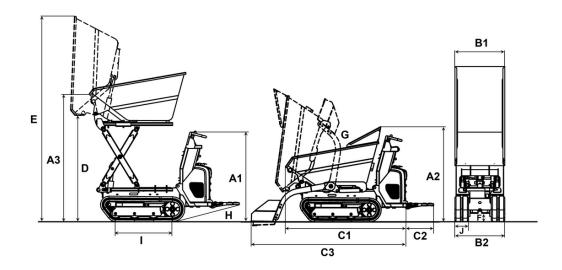

A1	Height above operator's stand	1,185 mm
A2	Height over skip hand guard	1,310 mm
A3	Height front edge of skip	760 mm
B1	Width of skip	660 mm
	Width of steering position	589 mm
B2	Width of undercarriage	660 °
	Width with self-loading equipment	700 mm
C1	Total length without footboard	1,670 mm
C2	Length footboard	365 mm
C3	Length with self-loading equipment, without footboard	2,149 mm
D	Dumping height max.	410 mm
E	Skip height tilted	1,827 mm
F	Ground clearance	110 mm
G	Dumping angle	72 °
Н	Rollback angle footboard	15 °
1	Length chain stand	753 mm