



WL60

Wheel Loader

High productivity and ideal comfort

The WL 60 wheel loader offers an extremely comfortable cab and a wide variety of options. The operating philosophy is designed for ergonomics. Everything is well within the operator's reach, which ensures fatigue-free work even over a longer period of time. The high flow load-sensing performance hydraulics with 150 l/min flow rate is the strongest in the 6 t class, also ensuring more operating comfort and less fuel consumption by the machine.

Highlights

- {30/40 km/h}{18.64/24.85 mph} speed
- The wheel loader as an attachment carrier
- Clear 3.5-inch digital display
- Comfortable working environment
- Joystick console spring-mounted on the operator's seat

Technical Data

■ Standard engine data

Engine manufacturer	Perkins
Motor type	904J-E36TA
Cylinder	4
Drive output	74.4 kW
Drive output	101.2 PS
at max. rpm	2,200 U/min
Cylinder capacity	3,621 cm ³
Type of coolant	Water/charge air
Exhaust standard level	V
Exhaust aftertreatment	DOC/DPF/SCR

Tipping load with pallet fork – machine pivoted, loading frame horizontal 2,791 kg

■ Driver's cab

Driver's cab Cab

■ Filling levels

Tank capacity for fuel 105 l
Tank capacity for hydraulic oil 95 l
Tank capacity for urea solution 19 l

■ Drive system

Type of drive Hydrostatic
drive unit universal joint shaft
Speed levels 2
Axe PA 1422

Travel speed Standard 0-20 km/h
Travel speed Option 1 0-30 km/h
Travel speed Option 2 0-40 km/h

Operating brake Disc brake (combined with parking brake)
Parking brake Service and parking brake in the drive train acts on all 4 wheels

Differential lock 100 % front axle + rear axle

■ Hydraulic system

Drive hydraulics working pressure (max.) 445 bar

■ Electrical system

Operating voltage	12 V
Battery	135 Ah
Alternator	85 A

■ Weights

Bucket capacity (standard bucket)	1.00 m ³
Operating weight	5,930 kg
Tipping load with bucket – machine straight, loading frame horizontal	3,674 kg
Tipping load with bucket – machine pivoted, loading frame horizontal	3,031 kg
Tipping load with pallet fork – machine straight, loading frame horizontal	3,344 kg

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Work hydraulics discharge volume (max.)	100 (115-150) l/min
Work hydraulics working pressure (max.)	210 bar

Steering cylinder	1
Oscillating angle	±12 degree

■ Kinematics

Kinematics type	Z
Lifting cylinder	2
Tipping cylinder	1
Quick change system	hydraulic

■ Noise characteristic values

Average sound power level LwA (cabin)	101.6 dB(A)
Guaranteed sound power level LwA (cabin)	103 dB(A)
Specified sound pressure level LpA (cabin)	74 dB(A)


■ Steering

Steering type	hydraulically activated articulated pendulum steering
---------------	---

■ Other information

FSD = overhead guard
DPF = diesel particulate filter
DOC = diesel oxidation catalyst
SCR = selective catalytic reduction
Tipping load calculation pursuant to ISO 14397

Dimensions

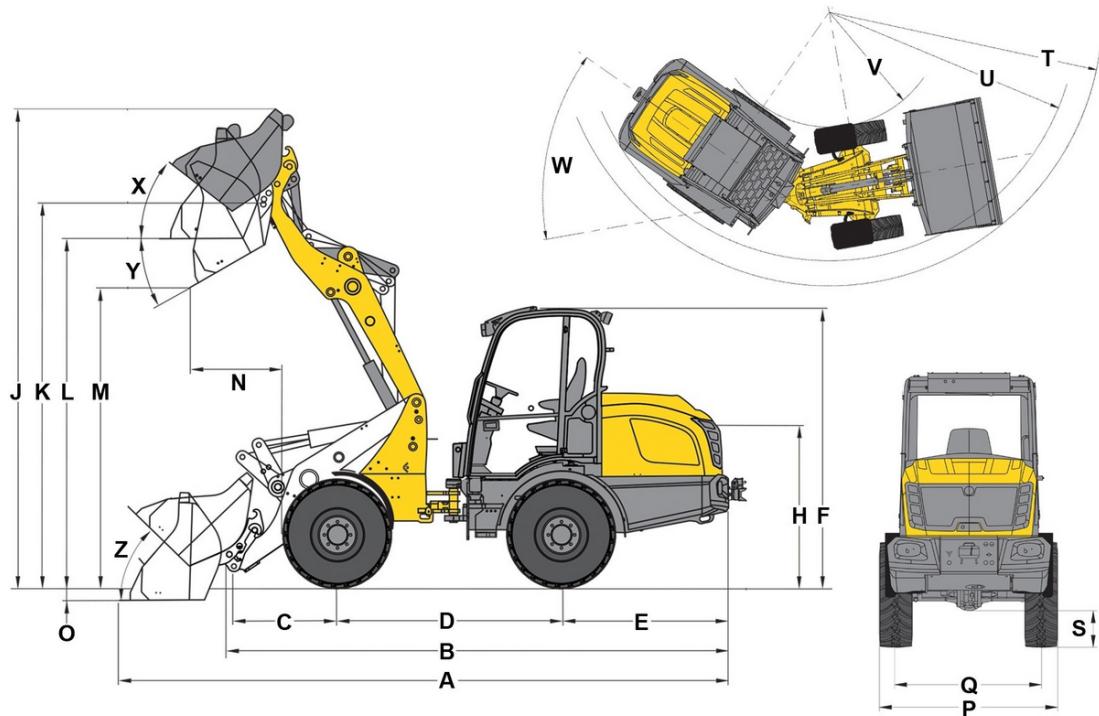

A	Total length	5,898 mm
B	Total length without bucket	4,780 mm
C	Bucket pivot point (to center of axle)	991 mm
D	Wheel base	2,150 mm
E	Rear overhang	1,676 mm
F	Height with cab	2,693 mm
G	Seat height	1,609 mm
H	Total working height	4,409 mm
I	Bucket pivot point (max. lift height)	3,686 mm
J	Load-over height	3,375 mm
K	Dumping height	2,841 mm
L	Reach (at M)	290 mm
M	Digging depth	74 mm
N	Total width	1,829 mm
O	Track width	1,422 mm
P	Ground clearance	375 mm
Q	Maximum radius	4,072 mm
R	Radius on the outer edge	3,686 mm
S	Inner radius	1,666 mm
T	Articulation angle	42°
U	Rollback angle at max. lift height	33°
V	Dumping angle	33°
W	Rollback angle on ground	39°