

# EZ20

## Tracked Zero Tail Excavator

Designed to be productive and durable on a wide variety of applications.

For high productivity in confined spaces, this excavator delivers excellent results. The EZ20 is perfectly suited for this application. The EZ20 is perfectly suited for this application. The extra-long dipperstick provides greater digging reach and the increased lifting capacity ensures maximum performance on the job site. With an ample counterweight and an ideal balance of performance and lift capacity, the machine stands out amongst its competitors. Designed and manufactured for long hours of reliable operation and low operating costs - even in difficult working conditions.

## Highlights

- 100 % Zero Tail
- Up to four additional factory-installed control circuits
- Powerful drive system with LUDV
- Swivel bracket
- Canopy can be easily disassembled

## Technical Data

### Hydraulic

| | |
|---|---|
| Operating pressure hydraulics | 240.0 bar |
| Flow rate | 39.0 l/min |
| Tank capacity | 21.0 l |

### Mechanical - Output Details

| | |
|---|---|
| Travel speed stage 1 | 2.6 km/h |
| Travel speed stage 2 | 4.8 km/h |

### Mechanical Details

| | |
|---|---|
| Length | 3,566.0 mm |
| Width | 1,090.0 mm |
| Height | 2,397.0 mm |
| Operating weight (min.-max.) | 2,020.0 kg |
| Digging depth (max.) | 2,546.0 mm |

### Engine

| | |
|---|---|
| Cooling | Water-cooling |
| Engine type | Diesel engine |
| Cylinder | 3.0 |
| Cylinder capacity | 1,266.0 cm³ |
| Tank capacity | 22.0 l |
| Effective power | 13.4 kW |
| Nominal Engine speed | 2,200.0 1/min |
| Exhaust-gas limit | 中国四 (China IV) |
| Starter battery Voltage | 12.0 V |
| Battery capacity (nom. value) | 44.0 Ah |
| Engine Manufacturer | Yanmar |
| Engine Designation | 3TNV80F-SSWN1 |

### Environment Data

| | |
|---|---|
| Sound level LpA | 79.0 dB(A) |
| Sound power LWA, measured | 93.0 dB(A) |
| Sound power LWA, guaranteed | 93.0 dB(A) |

### Operating Fluids

| | |
|---|---|
| Oil volume | 2.800 l |
| Cooling fluid volume | 4.8 l |
| Hydraulic fluid volume | 21.0 l |

### Chassis

| | |
|---|---|
| Traction drive | axial piston motor |
| Operating pressure | 240.0 bar |

### Shipping and Storage

| | |
|---|---|
| Length for shipping | 3,566.0 mm |
| Width for shipping | 1,090.0 mm |

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

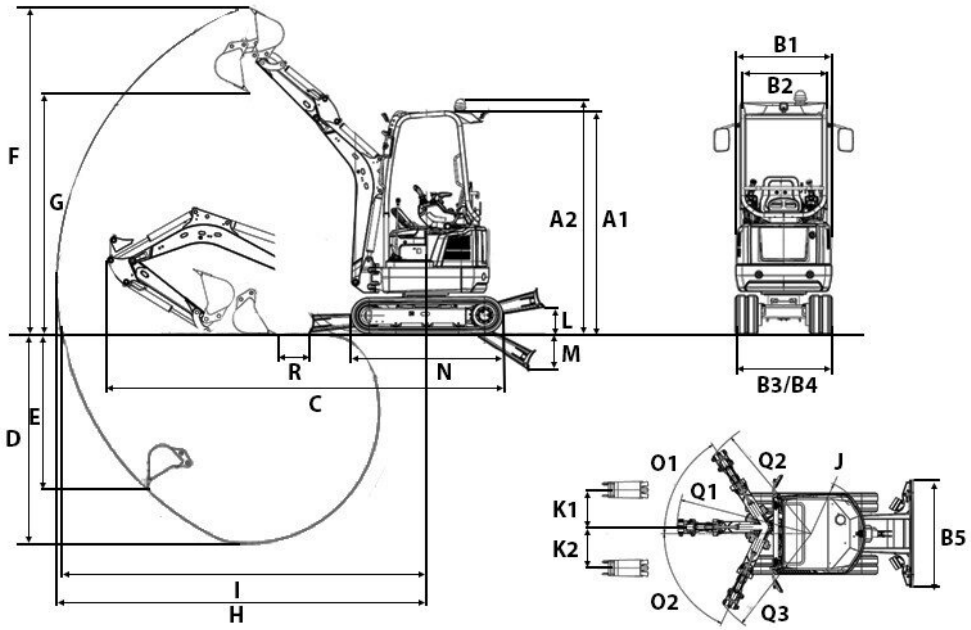

Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com

| | | | |
|---|---|---|---|
| Height for shipping | 2,397.0 mm | Shipping weight | 1,868.0 kg |

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.


Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com

## Dimensions




The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.


Copyright © 2026 Wacker Neuson SE | www.wackerneuson.com